

NAME OF VENDOR:-						REASON FOR QUOTING DEVIATION		
SL NO	VOULME/ SECTION	PAGE NO.	CLAUSE NO.	TECHNICAL SPECIFICATION / TENDER DOCUMENT	COMPLETE DESCRIPTION OF DEVIATION	COST OF WITHDRAWL OF DEVIATION	REFERENCE OF PRICE SCHEDULE ON WHICH COST OF WITHDRAWL OF DEVIATION IS APPLICABLE	NATURE OF COST OF WITHDRAWL OF DEVIATION (POSITIVE/ NEGATIVE)
TECHNICAL DEVIATIONS								
					In case of no deviation, the same is to be mentioned here. Otherwise, clause wise deviations along with cost of withdrawal of deviation, if applicable shall be furnished in sealed envelope along with Original price bid. However, the same shall be indicated as 'Quoted' under column 'Cost of Withdrawal of Deviation' along with technical offer/un-priced bid.			
COMMERCIAL DEVIATIONS								
PARTICULARS OF BIDDERS/ AUTHORISED REPRESENTATIVE								
NAME					DESIGNATIONS	SIGN & DATE		
NOTES:								
1. For self manufactured items of bidder, cost of withdrawal of deviation will be applicable on the basic price (i.e. excluding taxes, duties & freight) only .								
2. For directly dispatchable items, cost of withdrawal of deviation will be applicable on the basic price including taxes, duties & freight.								
3. All the bidders have to list out all their Technical & Commercial Deviations (if any) in detail in the above format.								
4. Any deviation not mentioned above and shown separately or found hidden in offer, will not be taken cognizance of.								
5. Bidder shall submit duly filled unpriced copy of above format indicating "quoted" in "cost of withdrawal of deviation" column of the schedule above along with their Techno-commercial offer, wherever applicable.								
6. Bidder shall furnish price copy of above format along with price bid.								
7. The final decision of acceptance/ rejection of the deviations quoted by the bidder shall be at discretion of the Purchaser.								
8. Bidders to note that any deviation (technical/commercial) not listed in above and asked after Part-I opening shall not be considered.								

9. For deviations w.r.t. Payment terms, Liquidated damages, Firm prices and submission of E1/ E2 forms before claiming 10% payment, if a bidder chooses not to give any cost of withdrawal of deviation loading as per Annexure-VIII of GCC, Rev-06 will apply. For any other deviation mentioned in un-priced copy of this format submitted with Part-I bid but not mentioned in priced copy of
10. Any deviation mentioned in priced copy of this format, but not mentioned in the un-priced copy, shall not be accepted.
11. All techno-commercial terms and conditions of NIT shall be deemed to have been accepted by the bidder, other than those listed in unpriced copy of this format.
12. Cost of withdrawal is to be given seperately for each deviation. In no event bidder should club cost of withdrawal of more than one deviation else cost of withdrawal of such deviations which have been clubbed together shall be considered as NIL.
13. In case nature of cost of withdrawal (positive/negative) is not specified it shall be assumed as positive.
14. In case of discrepancy in the nature of impact (positive/ negative), positive will be considered for evaluation and negative for ordering.



TITLE
2X660 MW SEZ ENNORE STPP
FOR CW PUMP HOUSE ABOVE 50T UPTO 150T
CONTENTS

SPECIFICATION NO. PE-TS-412-501-001
VOLUME: II B
REV 00
Section III NOV'16
Page 1 of 1

PRE-BID CLARIFICATION SCHEDULE

S. No.	Section/Clause /Page No.	Statement of the referred clause	Clarification Required

The bidder hereby certifies that above mentioned are the only clarifications required on the technical specification for the subject package.

SIGNATURE: _____

NAME: _____

DESIGNATION: _____

COMPANY: _____


DATE: _____

COMPANY SEAL

COMPUTER FILE NAME : TAL5


COPY RIGHT AND CONFIDENTIAL
The information on this document is the property of BHARAT HEAVY ELECTRICALS LIMITED
it must not be used directly or indirectly in any way detrimental to the interest of the company.

KEY PLAN

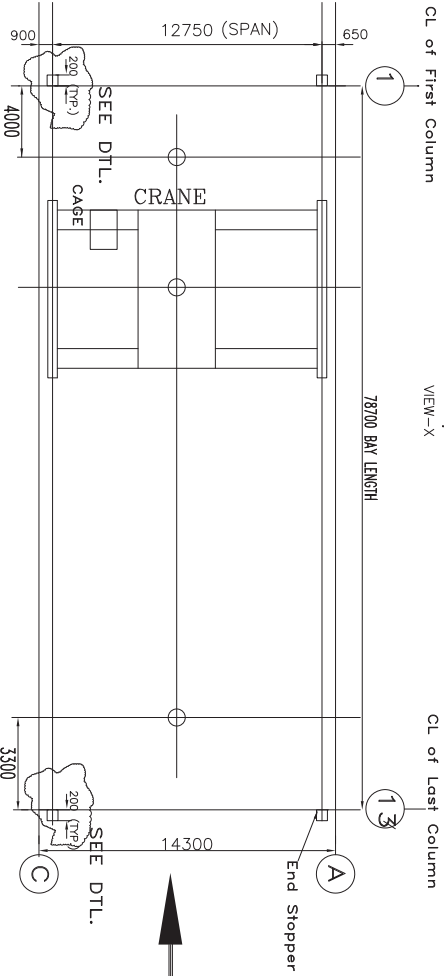

NOTES

- 1) ALL DIMENSIONS ARE IN MM & ELEVATIONS IN METRES.
- 2) (*) COLUMN WIDTH IS ASSUMED TO BE 1800MM & 1600MM ON 'A' & 'C' ROW RESPECTIVELY.

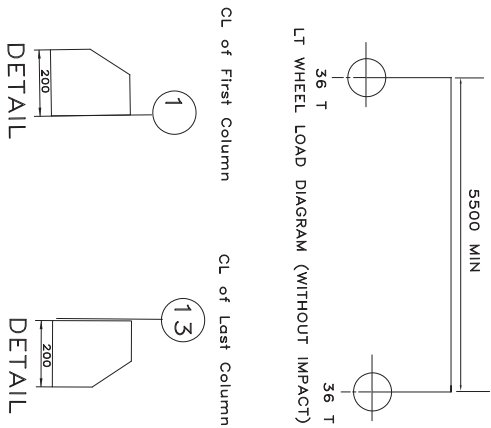

ON GIN/WRD

RL 22.0M

900

750

3000 MM HEAD ROOM

1200

500

650

EL 18.87 M

Top of Gantry girder

Walkway

Top of rail

SHROUDED BUS BAR DIST. MAINTENANCE CAGE (DIST. MAINTENANCE SCOPE)

1.600

2.500

HOOK APPROACH

MH AH

MH AH

2.200

1.300

RL+18.50M

RL+19.0M

SWL 70/18 TONNE

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800

HEIGHT OF LIFT ABOVE FLOOR

180

CL OF COLUMN

CL OF COLUMN

9,000

7,300

HEIGHT OF LIFT ABOVE FLOOR

9,000

7,800