

**BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS GROUP
SUBCONTRACTS MANAGEMENT
PLOT NO. 25, SECTOR 16A, NOIDA,
DISTT. – GAUTAM BUDDH NAGAR (U.P.) - 201301**



TENDER DOCUMENTS

FOR

**SUPPLY AND WORKS OF 11 kV DISTRIBUTION LINE FOR 400 KV GIS AT
VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW),
THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND.**

CUSTOMER

THDC INDIA LIMITED, Rishikesh, Uttarakhand

TENDER SPEC. NO.: TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25

DATE: 22.01.2025

TRANSMISSION BUSINESS GROUP
SUBCONTRACTS MANAGEMENT
INDEX

Sl. No.	Description	No. of Pages
1.0	Notice Inviting Tender	10
2.0	Pre-Qualifying Requirements	02
3.0	Project Information/ BHEL's Contacts	01
4.0	Health, Safety & Environment specification (Doc. No.: - TBG/HSE/NIT-01, Rev-02 Date 31.01.2024)	19
5.0	General Conditions of Contract for ETC Works (Document No. TB-ETC-GCC, Rev-02)	106
6.0	Annexure to conditions of contract for ETC Works	42
7.0	Annexure A of Clause No. N of Annexure to conditions of contract for ETC Works - "BHEL Conciliation Scheme"	11
8.0	Bill of Quantity Cum price schedule (Annexure-I)	01
9.0	Price Bid Format: - To be filled by the Bidder Online through https://eprocurebhel.co.in	01
10.0	Technical Specification (Doc. No.- TB-382-316-015)	55
11.0	No Deviation Certificate	01
12.0	Declaration for relation in BHEL	01
13.0	Declaration by Bidder	01
14.0	E payment Format	01



BHARAT HEAVY ELECTRICALS LIMITED

TRANSMISSION BUSINESS GROUP

SECTOR-16A, NOIDA -201301

e-mail: akmeena@bhel.in

NOTICE INVITING TENDER

REF.: TBSM/VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25

DATE: 22.01.2025

SUB: TENDER FOR "SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND".

Dear Sirs,

1. Sealed tenders are invited for the following:

NAME OF WORK	TIME OF COMPLETION	EARNEST MONEY DEPOSIT	TENDER SUBMISSION DATE AND TIME	TENDER OPENING DATE & TIME
SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND.	7 (Seven) Months (Supply + Services) from the date of LOI	NIL	05.02.2025 10.00 hrs.	05.02.2025 16.00 hrs. (Technical bid only)

2. Bidder has to submit offer directly through E-PROCUREMENT MODE. Bidder may visit <https://eprocurebhel.co.in>

Procedure for Submission of Tenders through e-tendering: The tender is also floated online through our E-Procurement Site <https://eprocurebhel.co.in>. The bidder may respond by submitting their offer online in our e-Procurement platform at <https://eprocurebhel.co.in>

Offers are invited in two-parts only.

Documents Comprising the e-Tender

The tender shall be submitted online above as mentioned below:

a) Technical Bid (Un priced Tender)

All Technical details (e.g. Eligibility Criteria requested (as mentioned below)) should be attached in e-tendering module, failing which the tender stands invalid & may be REJECTED. Bidders shall furnish the following information along with technical tender (preferably in pdf format):

- i) Technical Bid (without indicating any prices).

b) Price Bid:

- Prices are to be quoted in the attached Price Bid format online on e-tender portal.
- The price should be quoted for the accounting unit indicated in the e-tender document.
- Note: It is the responsibility of tenderer to go through the Tender document to ensure furnishing all required documents in addition to above, if any. Any deviation would result in REJECTION of tender and would not be considered at a later stage at any cost by BHEL.
- A person signing (manually or digitally) the tender form or any documents forming part of the contract on behalf of another shall be deemed to warrantee that he has authority to bind such other persons and if, on enquiry, it appears that the persons so signing had no authority to do so, the purchaser may, without prejudice to other civil and criminal remedies, cancel the contract and hold the signatory liable for all cost and damages.

- v) A tender, which does not fulfil any of the above requirements and/or gives evasive information/reply against any such requirement, shall be liable to be ignored and rejected.
 - c) Uploading of the price bid in prequalification bid or technical bid may RESULT IN REJECTION of the tender.
 - d) Tenders shall be uploaded with all relevant PDF/zip format. The relevant tender documents should be uploaded by an authorized person having Class 3- SHA2- 2048 BIT- SIGNING & ENCRYPTION digital signature certificate (DSC).
3. **EMD is not applicable for this Tender.**
4. **Bidders may please note that no other mode of bid submission shall be considered for evaluation apart from Clause no. 02 to 03 mentioned above.**
5. The prospective bidders who have downloaded the tender documents from our website are requested to send their acknowledgement and willingness to participate in the tender to the undersigned, through fax or email.
6. Offers should be strictly in accordance with the Tender Specifications and General Instructions to Tenderer enclosed herewith.
7. "BHEL shall be resorting to Reverse Auction (RA) (Guidelines as available on www.bhel.com) for this tender. RA shall be conducted among the techno-commercially qualified bidders as per RA Guidelines.
- Price bids of all techno-commercially qualified bidders shall be opened and same shall be considered for RA. In case any bidder(s) do(es) not participate in online Reverse Auction, their price bid along with applicable loading, if any, shall be considered for ranking."
8. The contractor shall give his explicit confirmation without any deviations to the HSE (Health, Safety and Environment) requirements as per enclosed specification No. TBSM/HSE/NIT-01, Rev-02 Date 31.01.2024. Contractors are also required to furnish details as per Annexure (HSE) to NIT along with their offer. Offers received without compliance & data about HSE requirements are liable to be rejected.
9. All documents submitted with the offer shall be signed and stamped in each page by authorized representative of the bidder.
10. Clarifications, if any, can be obtained from the undersigned but such requests should be submitted well before the due date for submission of tenders. Due date for submission and opening of tenders will not be extended on such grounds.
11. Please note that wherever there is a contradiction between the 'ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS' and 'Conditions of contract for ETC works', the 'ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS' clauses shall be governing and binding on the contractor.
12. Drawings & FQP enclosed with the NIT (if provided) are for tender purpose only. Drawings & FQP may get change during execution stage and work to be carried as per latest RFC drawings & Field Quality Plan (FQP).
13. Construction/ RFC drawing/ Fronts shall be furnished progressively as per project requirement and no claim towards idling charges/ project overheads etc. borne by the contractor on account of non-availability of drawings/ fronts shall be entertained.
14. Completion period of the work has been envisaged under best possible conditions. Any changes/ deviation during execution shall be dealt as per relevant clauses mentioned in general/ special conditions of contract for ETC works.
15. *"In case this tender is awarded to first time contractor*, then the bidder shall be eligible to qualify for the next tender of similar work# of BHEL, TBG; only after successful executing of 50% (fifty percent) of*

this work prior to the date of next tender (in which bidder desires to quote) and on satisfactory performance feedback by BHEL site Incharge.”

** First time contractor: The bidders who have not successfully executed more than 50% (fifty percent) of awarded similar work by BHEL (TBG/ ISG/Power Sector/Any BHEL Unit) in last 5 years from date of NIT.*

The bidders who have taken any order from BHEL under 1st time category, and desires to further participate in BHEL tenders, needs to submit a certificate/ undertaking mentioning the reason of not executing 50% of awarded work, hence the criteria under 1st time bidder shall not be applicable to them. The certificate/ undertaking shall be duly certified by Site In charge of BHEL

Similar work: Similar to nature of work of the tender under consideration.

16. **Before submission of offer, the tenderer is advised to inspect the work & the environments and be well acquainted with the actual working and other prevalent conditions, facilities available, sourcing of material and labour, means of transport and access to site, accommodation, etc.** No claim will be entertained later on the grounds of lack of knowledge on any of these conditions/ resources.
17. The offers of the bidders who are under suspension as also the offers of the bidders, who engage the services of the banned firms, shall be rejected. The list of banned firms is available on BHEL web site www.bhel.com.
18. Integrity commitment, performance of the contract and punitive action thereof:
 - 18.1. Commitment by BHEL:

BHEL commits to take all measures necessary to prevent corruption in connection with the tender process and execution of the contract. BHEL will during the tender process treat all Bidder(s) in a transparent and fair manner, and with equity.
 - 18.2. Commitment by Bidder/ Supplier/ Contractor:
 - 18.2.1. The bidder/ supplier/ contractor commits to take all measures to prevent corruption and will not directly or indirectly influence any decision or benefit which he is not legally entitled to nor will act or omit in any manner which tantamount to an offence punishable under any provision of the Indian Penal Code, 1860 or any other law in force in India.
 - 18.2.2. The bidder/ supplier/ contractor will, when presenting his bid, disclose any and all payments he has made, and is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract and shall adhere to relevant guidelines issued from time to time by Govt. of India/ BHEL.
 - 18.2.3. The bidder/ supplier/ contractor will perform/ execute the contract as per the contract terms & conditions and will not default without any reasonable cause, which causes loss of business/ money/ reputation, to BHEL.

If any bidder/ supplier/ contractor during pre-tendering/ tendering/ post tendering/ award/ execution/ post-execution stage indulges in mal-practices, cheating, bribery, fraud or and other misconduct or formation of cartel so as to influence the bidding process or influence the price or acts or omits in any manner which tantamount to an offence punishable under any provision of the Indian Penal Code, 1860 or any other law in force in India, then, action may be taken against such bidder/ supplier/ contractor as per extant guidelines of the company available on www.bhel.com and/or under applicable legal provisions”.
19. Also, offer of the bidders who are suspended (under hold/ delist) for business dealings by BHEL, TBG shall not be considered. Please note that lifting/ restoration of suspension (Ban/Hold/ De-list) of business dealing is not automatic after expiry of specified suspension period. Hence, vendor shall be considered as suspended for business till suspension is lifted by BHEL in writing on specific request of the vendor as per extant guidelines.
20. BHEL Fraud Prevention Policy, "The Bidder along with its associate/ collaborators/ sub-contractors/ sub-vendors/ consultants/ service providers shall strictly adhere to BHEL Fraud Prevention Policy

displayed on BHEL website <http://www.bhel.com> and shall immediately bring to the notice of BHEL Management about any fraud or suspected fraud as soon as it comes to their notice."

21. Offers will be scrutinized based on the qualifying requirements and only those who are technically and financially capable to execute the Job and who fulfil the Pre-Qualifying Requirements (PQR) are eligible to quote against the above NIT. However, final acceptance of the bidder/ offer shall be subject to acceptance of our customer.

22. The evaluation currency for this tender shall be INR.

23. EMD is not applicable for this Tender.

24. In the course of evaluation, if more than one bidder happens to occupy L-1 status, effective L-1 will be decided by soliciting discounts from the respective L-1 bidders.

In case more than one bidder happens to occupy the L-1 status even after soliciting discounts, the L-1 bidder shall be decided by toss/ draw of lots, in the presence of the respective L-1 bidder(s) or their representative(s).

Ranking will be done accordingly. BHEL's decision in such situations shall be final and binding.

25. Technical Bid will be opened in the office of undersigned. If required, technical discussions will be held with only those bidders who have taken any deviations. The price bids will be opened subsequently, after Technical Bids of all the bidders have been evaluated and freezed. Bidders should quote their most competitive rates as there will not be any price negotiation. However, if felt necessary by BHEL, price negotiation will be held with lowest bidder (L-1) only. **IT WOULD BE PREFERRED THAT YOUR OFFER IS WITHOUT ANY DEVIATION w.r.t. TENDER SPECIFICATIONS AND THE SAME MAY BE CLEARLY MENTIONED ON THE COVERING LETTER ACCOMPANYING THE TECHNICAL BID.** Offers with deviations are likely to be rejected.

26. In case any adverse information is received concerning performance, capability or conduct of the bidder after issue of tender enquiry, BHEL reserves the right to reject the offer at any stage as deemed fit.

27. Integrity Pact (IP) is not applicable for this tender.

28. Any materials (if required) for ETC works have to be procured from Customer approved sources only. It will be the bidder's responsibility to get the approval of materials and vendors for materials.

29. The purchase preference for central P.S.U.s shall be given as per the prevailing Government policy.

30. Work schedule and the deployment of manpower and T&P resources committed by the contractor in their offer, to match the scheduled completion, shall be submitted by contractor and mutually agreed with site In-charge immediately after the award of work. Further, the contractor shall mobilise at site within two weeks of award of work.

31. In case an offer is not being submitted by the prospective bidders against this tender, they may send their "regret" letter to this office, for information.

32. Details of qualifying work(s) executed by the bidder will be forwarded to the principal employer for verification of the work with respect to completion, commencement & completion date and value of the work executed. Performance feedback of the bidder will also be sought from the principal employer.

33. The bidder representative may be called for discussion with the committee. His originals may be verified by the committee. In addition to above their organisation chart and detail list of manpower, tools & plants and technically capability will be discussed and ascertained by the committee.

34. **Conflict of Interest among bidders/Agents: -**

*"A bidder shall not have conflict of interest with other bidders. Such conflict of interest can lead to anti-competitive practices to the detriment of Procuring Entity's interests. **The bidder found to have a conflict of interest shall be disqualified.** A bidder may be considered to have a conflict of interest with one or more parties in this bidding process, if:*

- a) they have controlling partner (s) in common; or*

- b) *they receive or have received any direct or indirect subsidy/ financial stake from any of them; or*
- c) *they have the same legal representative/agent for purposes of this bid; or*
- d) *they have relationship with each other, directly or through common third parties, that puts them in a position to have access to information about or influence on the bid of another Bidder; or*
- e) *Bidder participates in more than one bid in this bidding process. Participation by a Bidder in more than one Bid will result in the disqualification of all bids in which the parties are involved. However, this does not limit the inclusion of the components/ sub-assembly/ Assemblies from one bidding manufacturer in more than one bid; or*
- f) *In cases of agents quoting in offshore procurements, on behalf of their principal manufacturers, one agent cannot represent two manufacturers or quote on their behalf in a particular tender enquiry. One manufacturer can also authorise only one agent/dealer. There can be only one bid from the following:*
 - 1. *The principal manufacturer directly or through one Indian agent on his behalf; and*
 - 2. *Indian/foreign agent on behalf of only one principal;*

or
- g) *A Bidder or any of its affiliates participated as a consultant in the preparation of the design or technical specifications of the contract that is the subject of the Bid; or*
- h) *In case of it holding company having more than one independently manufacturing units, or more than one unit having common business ownership/management, only one unit should quote. Similar restrictions would apply to closely related sister companies. Bidders must proactively declare such sister/ common business/ management units in same/ similar line of business. "*

Thanking you,

Yours faithfully,
For and on behalf of BHEL,

(Ashok Kumar Meena)
Sr. DGM /TBSM

TO BE FILLED BY TENDERER OVER THEIR LETTERHEAD

ANNEXURE – X

Ref: TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25

DATE: 22.01.2025

SUB: Tender for “SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND”.

It is certified that General Instructions and Information for tenderer have been read/ complied/ agreed to and each page of tender offer has been initialled and stamped.

Also It is being declares that we (.....Bidder Name) will not enter into any illegal or undisclosed agreement or understanding, whether formal or informal with other Bidder(s). This applies in particular to prices, specifications, certifications, subsidiary contracts, submission or non-submission of bids or any other actions to restrict competitiveness or to introduce cartelization in the bidding process.

In case, the Bidder is found having indulged in above activities, suitable action shall be taken by BHEL as per extant policies/ guidelines

(Signature of Tenderer)

Name and Designation of Authorised person (s)
Signing the tender on behalf of the tenderer

(TO BE FILLED BY TENDERER OVER THEIR LETTERHEAD)

ANNEXURE – Y

REF: TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25

DATE: 22.01.2025

SUB: Tender for “SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND”.

Subject: Declaration confirming knowledge about Site conditions

I/We, _____ hereby declare and confirm that we have visited the Project Site with reference to above BHEL Tender Specifications and acquired full knowledge and information about the Site conditions including Wage structure, Industrial Climate, the Law & Order and other conditions prevalent at and around the Site. Also, we have acquired information about availability of manpower, construction material, water, electricity etc.

We further confirm that the above information is true and correct and we shall not raise any claim of any nature due to lack of knowledge of Site conditions.

I/We, hereby offer to carry out work as detailed in above mentioned Tender Specification, in accordance with Terms & Conditions thereof.

Site Visited Official Name & Contact Details:

(Signature of Tenderer)

Name and Designation of Authorised person (s)
Signing the tender on behalf of the tenderer

ANNEXURE – Z

Ref: -TBSM/VISHNUGAD PIPALKOTI/SUPPLY-ETC/TENDER/24-25

DATE: 22.01.2025

SUB: Tender for “SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND”.

Subject: Authorization of representative who will participate in the Online Reverse Auction Process:

1	NAME & DESIGNATION OF OFFICIAL	
2	POSTAL ADDRESS (COMPLETE)	
3	TELEPHONE NOS. (LAND LINE & MOBILE BOTH)	
4	FAX NO.	
5	E-MAIL ADDRESS	
6	NAME OF PLACE / STATE / COUNTRY, WHEREFROM S/HE WILL PARTICIPATE IN THE REVERSE AUCTION	

BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS GROUP, NOIDA
PRE-QUALIFYING REQUIREMENTS

REF.: TBSM/VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25

DATE: 22.01.2025

SUB: TENDER FOR “SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND”.

Tenders (Under two-part bid system) are invited from competent contractors for subject works. Only those who are technically and financially capable to execute the Job and who fulfil the Pre-Qualifying Requirements [PQR] given under are eligible to quote against the above NIT. Tenderers should submit their offer as per the procedure specified in tender documents. The PQR of contractor for tender submission shall be as under:

Sl. No.	Criteria	Description
A	Turn Over	<p>Bidders should have a minimum average annual turnover (Annual Gross Revenue from operations/ Gross operating income as incorporated in the profit & loss account excluding Other Income) of ₹ 8,50,526/- for last three financial years (2021-22, 2022-23 & 2023-24) and should submit audited balance sheet and Profit & Loss Account Sheet of these years.</p> <p>The audited financial statements must be signed by the owner and the auditor. Auditors seal, Name, Membership No., Firm Registration No. & firm name (if applicable), UDIN and the capacity in which he is signing (Proprietor/Partner), must be mentioned on the Profit & Loss A/c and Balance Sheet.</p> <p>In case of proprietorship and partnership firms where Audited Profit & Loss A/c and Balance Sheet is not mandatory as per extant rules, CA certificate certifying turnover and profit for the required financial years must be submitted. CA certificate must be on his letter head mentioning his/her name, Membership No., Firm Registration No. & firm name (if applicable), UDIN, capacity in which he is signing (Proprietor/Partner), date and place of signing.</p>
B	Profit & Networth	<p>Bidder should have earned profit in at least one financial year during the period of last three Financial Years as per Sl. No. A above</p> <p style="text-align: center;">and</p> <p>Net worth of the Bidder based on the latest Audited Accounts as furnished for ‘A’ above should be positive. Net worth = Paid up share capital + Reserves. (Net worth is required to be evaluated in case of companies)</p>
C	Similar Work*	<p>The bidder should have successfully erected, testing and commissioned/pre-commissioned of transmission/ distribution lines of 11 kV rating or above voltage class during last 10 years ending on 05.02.2025 and should be either of the following:</p> <p>i. Three similar jobs costing (except service tax/GST) not less than ₹ 11,34,035/- each.</p> <p style="text-align: center;">OR</p> <p>ii. Two similar jobs costing (except service tax/GST) not less than ₹ 14,17,544/- each.</p> <p style="text-align: center;">OR</p>

		iii. One similar job costing (except service tax/GST) not less than ₹ 22,68,070/-
Notes: - <ol style="list-style-type: none"> 1. The Bidder shall submit the Contract Agreement/Work Order/LOI along with BOQ and Performance/completion/execution certificate issued by customer/contractor along with technical bid in support of qualification. 2. In order to technically qualify in this tender, bidder should meet all criteria i.e. A, B & C mentioned above. 3. If the qualifying work is executed in the last 10 years period, as specified above, even if it has been started earlier, the same will also be considered meeting the qualifying requirements. 4. Consortium/ JV bidding is not allowed. 		

General Notes:

1. Bidder shall quote prices in INR only for all the items of BOQ.
2. BHEL reserves the right to:
 - (a) Accept or reject any bid received at its discretion without assigning any reasons whatsoever.
 - (b) Postpone the above-mentioned date, split and distribute the work among more than one bidder without assigning any reason whatsoever.
 - (c) May ask for further qualification during techno commercial scrutiny of bids received.
 - (d) May ask for further proofs including TDS certificates/ Form 26AS/ Final bill/ payment detail for the said job for cross- verification.
3. BHEL shall not be responsible for any delay, loss, damage for documents submitted through post by bidders for this tender.
4. BHEL shall not be liable for any expenses incurred by bidder in preparation of bid irrespective of whether it is accepted or not.
5. Quotations received from bidders who do not fulfil the PQR shall be summarily rejected without any further evaluation and information to bidders.
6. Canvassing i.e. soliciting favour, seeking advantage etc. in any form is strictly prohibited and any bidder found to have engaged in canvassing shall be liable to have his bid rejected summarily.
7. If the bidder deliberately gives any wrong information in his tender to create in circumstances for the acceptance to his bid, BHEL reserves the right to reject such application.
8. Bidder's selection is subject to approval of BHEL's customer for this work. The approval/acceptance of bidders from Customer is mandatory requirement for subject tender.
9. All corrigenda, addenda, amendments and clarifications to this Tender will be hosted in web page, www.bhel.com and <https://eprocurebhel.co.in> and not in the newspaper. Bidders shall keep themselves updated with all such amendments.

PROJECT INFORMATION

1.0 CUSTOMER:

M/s THDC India Limited, Rishikesh, Uttarakhand

2.0 PROJECT LOCATION AND DETAILS:

TENDER FOR “SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND”.

SITE ADDRESS:

<http://surl.li/bgvrma>

3.0 CONTACT PERSON: FOR CONTRACTUAL ISSUES

Ashok Kumar Meena
Sr. DGM (TBMS)
SUBCONTRACTS MANAGEMENT,
TRANSMISSION BUSINESS GROUP,
Plot No. 25, Sector-16A, Noida,
Distt. Gautambudh Nagar, UP-201301

PHONE: 0120-674-8545/ 9831038136

E-mail: akmeena@bhel.in

CONTACT PERSON: FOR ENGINEERING ISSUES

BAIDYANATH YADAV
SR. ENGINEER (TBEM-ELECTRICAL)
TRANSMISSION BUSINESS GROUP,
Plot No. 25, Sector-16A, Noida,
Distt. Gautambudh Nagar, UP-201301

PHONE: 0120- 674- 8510

Phone - 8130247369

E-mail: byadav@bhel.in

CONTACT PERSON: FOR CONTRACT EXECUTION ISSUES

Sunil Kumar
AGM & Sector Head/TBNS
TRANSMISSION BUSINESS GROUP,
Plot No. 25, Sector-16A, Noida,
Distt. Gautambudh Nagar, UP-201301

PHONE: 9761724520

PHONE: 0120- 674- 8471

E-mail: sunil.kumar@bhel.in

HSE CONDITIONS

at a GLANCE (for bidders)



Health Safety and Environment Management



BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS GROUP



Transmission Business Group, Noida

DOCUMENT CONTROL			
Document number:	TBG/HSE/NIT-01		
Issue number:	00	Issue date:	08.01.2020
Revision number:	01	Revision date :	22.10.2021
Revision number:	02	Revision date :	31.01.2024
	Prepared by		Approved and Issued for use by
Name	Arvind Kumar Pandey		RS Pathwar
Designation	Sr. Engineer		Dy. General Manager
Signature	-sd-		-sd-
Date	31.01.2024		31.01.2024
Doc. copy issue no. :		Doc. copy issue date :	
Issued to :	Name	Designation	Signature
Issued by :	Name	Designation	Signature

BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS GROUP

BHEL TBG through its long experience and policy, has developed a culture to consider wellbeing of the society, protection of environment and occupational health and safety of its workers first. TBG has also a culture of transparency in all its business activities. In line to this culture, this NIT annexure is prepared as a peeping window in to the TBG HSE requirements which need to be 100% complied by the successful bidders while executing the contract. Interested bidders should go through these HSE conditions:

1. BHEL HSE Policy



The graphic features the text 'HEALTH SAFETY ENVIRONMENT POLICY' in large, bold, white letters on a green and blue background. To the right, there are several interlocking gears. One gear contains a green leaf, another a yellow hard hat, and a central gear has a smiling face. A stylized human figure in a suit is shown interacting with the gears.

In BHEL, Health, Safety and Environment (HSE) responsibilities are driven by our commitment to protect our employees and people we work with, community and environment. BHEL believes in zero tolerance for unsafe work/non-conformance to safety and in minimizing environmental footprint associated with all its business activities. We commit to continually improve our HSE performance by:

- Developing safety and sustainability culture through active leadership and by ensuring availability of required resources.
- Ensuring compliance with applicable legislation, regulations and BHEL systems.
- Taking up activities for conservation of resources and adopting sound waste management by following Reduce/Recycle/Reuse approach.
- Continually identifying, assessing and managing environmental impacts and Occupational Health & Safety risks of all activities, products and services adopting approach based on elimination/substitution/reduction/control.
- Incorporating appropriate Occupational Health, Safety and Environment criteria into business decisions, design of products & systems and for selection of plants, technologies and services.
- Imparting appropriate structured training to all persons at workplace and promoting awareness amongst customers, contractors and suppliers on HSE issues.
- Reviewing periodically this policy and HSE Management Systems to ensure its relevance, appropriateness and effectiveness.
- Communicating this policy within BHEL and making it available to interested parties.

June 5, 2018


Atul Sobti
Chairman & Managing Director

Creating  of tomorrow

2. Legal Compliances:

- a. **Statutory Provisions:** All the sub-contractors are to comply with client specific rules and procedures, the National legislations and codes, in particular the following or their revised versions:

Srl. No	Acts/Rules Name	Srl. No	Acts/Rules Name
1	The Factories Act 1948, Amendment Act 1947	11	Contractor labour Act, 1970 (Regulation and abolition)
2	The Environment Act 1986	12	Provident fund Act, 1952
3	Workmen's Compensation Act, 1923	13	Payment of gratuity Act, 1972
4	Building and Other Construction Workers (Regulation of employment and condition of service) Act, 1996	14	Indian Explosives Act and the explosives Rules 2008
5	Buildings and Other Construction Workers Welfare Act, 1996	15	The Gas Cylinder Rules, 2016, Static and Mobile Pressure Vessels (Unfired) Rules 2016
6	Payment of wages Act, 2017 Equal remuneration Act,	16	The Indian Electricity Act 2003 and Indian Electricity Rules 2005
7	Minimum wages Act.1948	17	The Atomic Energy Act, 2015
8	Employers liability Act, 1938	18	The atomic energy (Radiation Protection) Rules. 2004
9	Industrial dispute Act, 1947	19	National Fire Protection Association (NFPA),
10	maternity benefit amendment act 2017	20	National Building Code of India 2016 etc.

b. **Indian Standard (IS) Codes related to HSE**

All the sub-contractors are to comply with client specific rules and procedures, the National legislations and codes in particular the following or their revised versions:

Srl	IS Code	Applies on
1	IS: 4081 -1986	Safety code for Blasting and Related Drilling operations
2	IS: 3764 -1992	Safety code for excavation work

3	IS: 5121 -1969	Safety code for piling and other deep foundations
4	IS: 2750 -1964	Specification for steel scaffoldings
5	IS: 3696 (Part-I)-1987	Safety code for scaffolds and Ladders: Part- I Scaffolds
6	IS: 3696 (Part-II) -1991	Safety code for scaffolds and Ladders: Part –II Ladders
7	IS: 4082 -1977	Recommendations on stacking and storage of construction materials at site (First revision)
8	IS: 4130-1976	Safety code for demolition of building (First revision)
9	IS: 4912-1978	Safety requirements for floor and wall openings, railings and toe boards (First revision)
10	IS: 5916- 1970	Safety code for constructions involving use of hot bituminous materials
11	IS: 7205 -1974	Safety code for erection of structural steel work
12	IS: 7969 -1975	Safety code for handling and storage of building materials
13	IS: 8989 -1978	Safety code for erection of concrete framed structures
14	IS: 7293 -1974	Safety code for working with construction machinery
15	IS: 2212 -1991	Pipe lines –Identification –Colour code
16	IS: 5216 -1982	Recommendations on safety procedures & practices in Electrical works (Part -I & II)
17	IS: 875 -1964	Code of practice for structural safety of buildings and loading standards
18	IS: 10386 -1983	General aspects Part-1 -1983, Part-2 -1982, Part-6 -1983, Part-10 -1983- Amenities, Protective clothing and equipment, construction, storage, handling, detection and Safety measures for gases, chemicals and flammable liquids
19	IS: 10500-2012	Drinking water (Specification)
20	IS: 10291 -1982	Code of dress in civil engineering works
21	IS: 2925-1984	Safety helmets
22	IS: 1179-1967	Welding helmets
23	IS: 7524 -1979 (Part-I)	Safety goggles
24	IS: 9167 -1979	Ear muff /Ear plugs
25	IS: 6994 -1973 (Part-I)	Canvas hand gloves, Cotton hand gloves, Chrome leather gloves
26	IS: 4770 -1991	Rubber hand gloves tested for 15,000 volts
27	IS: 3521 -1999	Full body safety harness
28	IS: 11057 -1984	Specification for Industrial safety nets

29	IS: 13415 -1992	Protective Barriers in & around buildings (Code of safety)
30	IS: 13416 -1992	Preventive measures against Hazards at work places-Recommendations part-I Falling materials hazards Prevention part-I
31	IS: 13416 -1992	Preventive measures against Hazards at work places-Recommendations part-II Fall Prevention
32	IS: 15298 -2011 (Part 1&2)	Personal Protective Equipment -Safety shoes
33	IS: 12254 -1993	Poly vinyl chloride (PVC) industrial boots
34	IS: 5557:2004	Industrial and Protective Rubber knee and Ankle boots
35	IS: 2878 -2004	Co2 Type fire extinguisher
36	IS: 2171 -1999	Dry chemical powder fire extinguisher
37	IS: 13849 – 1993	Fire extinguisher for ABC fires
38	IS: 10204-2001	Mechanical Foam type extinguisher (Foam used shall conform to IS: 4989 -1974 and Co2 cartridge shall conform to IS: 4947 -1985)
39	IS: 3786 -1983	Methods for computation of Frequency rate and Severity rates for Industrial injuries and classification of Industrial accidents (First revision)

c. The Sub-contractors need to

- Attend HSE familiarization program at TBG-HQ with his site management team. This will be a half day long awareness session on HSE requirements and compliances which the agency is supposed to fulfil during contract execution at site. The session shall be taken by TBG HSE department on intimation by TBSM. **(Rev-01)**
- Request for issuance of Form-V in their name from customer on behalf of BHEL
- Get the Labour license registration from concerned Labour office.
- Get the BOCW Registration done along with the labour license.
- Get their labourers registered under BOCW for benefits provided by the office.
- Maintain Seven registers of labours as per BOCW requirement.
- Ensure payment of wages to labours not less than the current minimum wages applicable in the premises.
- Ensure PF deduction of labourers and submission of proof to BHEL office (Wage sheet, ECR & Challan copies) duly signed.
- Submit Labour Payment Certificate by 10th of Every month.
- File timely returns, get renewals done and submit a copy to BHEL office.

- Get Workmen's Compensation policy before the start of work, covering all the labourers and staff,
 - Policy should clearly mention the project name and location,
 - should be as per labour class and wage.
 - Should cover all the height workers with clear mention of Max. height.
 - Policy should be submitted to BHEL office and renewal before expiry.
- Issue employment card to every worker.

3. Labour Welfare and Medical Facilities

a. Labour Welfare

1. Declaration of normal working hours and weekly off day, Payment day & intervals
2. Paid rest days & holidays.
3. Payment of overtime @ twice the normal wage rate.
4. No labour shall be allowed overtime >12 hrs/week, limited to 48 hrs/month.
5. Rest and lunch area.
6. Separate Male/Female Toilets and Lavatories, clearly marked in local Language and provided with signage.
7. Cold and clean drinking water facility suitable to strength and near workplace
8. Creche for children of female workers as per BOCW requirements
9. Arranging labour accommodation in hygienic environment with the facilities of Water (Drinking, Sanitation), washing and bathing area, toilets in sufficient nos., clean and safe camps and surrounding, access road, well illuminated camp and roads, mode of contact, transport facility, first aid centre, 24x7 Security etc.
10. Cooking and eating place to be maintained in hygienic condition
11. General awareness of health and hygiene.

b. Medical facilities and Health centres

- Availability of first aid box at every work location and agency office, with contents as per BOCW requirement.
- Emergency vehicle (four-wheeler) at work place
- Availability of stretchers in emergency vehicle and in office.
- Trained first aider
- Medical check-up for all the supervisors and workers including cooks, at the time of induction and annually thereafter.
- Tetanus Vaccination for all in every six months.
- Identification and tie-up with nearby reputed hospital(s) and display of their contact number in Emergency contact list.

4. House Keeping & Storage

Housekeeping is a continuous process and is the part of work. Agencies shall maintain safe and presentable housekeeping all the time in their respective areas, common work locations and passage areas. Roads, passages, staircases, entrance/exit gates shall always be maintained obstruction free. No material shall be left or stacked at the roof edges. Agency shall make arrangements to remove scraps on regular basis and dispose them at a space provided by customer, clearly fenced and marked by the sub-contractor as **“SCRAP YARD”**. Suitable arrangement like dedicated housekeeping team and tractor/hydra should be identified for this work.

Construction materials like shuttering materials, staging materials, cables, re-bars, cements bags, earthing flats and rods, FF pipes, surplus soil etc should be stored/stacked properly such that it should neither pose threat to safety of man nor should obstruct the free movement of man and machineries.

Every sub-contractor should have separate and well-maintained storage area for his own materials, T&Ps, PPEs and BHEL issued materials. Consumables like diesel, cotton, grease, oil, paint, admixtures and other fire potential materials should be stored separately with suitable firefighting facility.

Fire capacity of store area to be assessed and accordingly fire extinguishers shall be planned suiting the class and capacity of fire. Sand heaps may also be stacked in open store yards suitably to use in case of fires.

5. Site Safety

a. Induction and others safety trainings

Every sub-contractor shall make arrangement to provide induction training as per BHEL and/or customer requirement on a pre-approved and fixed module to all its new inductees irrespective of class or grade of appointment/hire. He shall also arrange the required facilities for induction training such as board, marker, dummy, posters/banners with all the mandatory PPEs.

Sub-contractor shall also arrange for periodic trainings on fire-fighting, first aid, CPR, importance and use of PPEs, electrical safety, hot work safety, Height work safety, confined space, deep excavations and barricading, concreting work safety etc.

b. Appointment of Safety Officer/Supervisor

Every sub-contractor shall appoint full time **safety officer(s)** as per **Schedule VIII of BOCW Act-1996**. The safety officer so appointed, shall not be assigned any duty/work other than assisting in fulfilment of legal and contractual obligations at site. He shall perform his duties in line to meet the requirements of TBG HSE MANAGEMENT SYSTEMS, such as ensuring daily TBT, conducting induction and other HSE training and awareness programs, organising HSE campaigns, health check-ups, periodic mock drills, reporting & record keeping and other such compliances as per **HSE Plan for Site Operation (TBG/HSEP-14)** on regular basis. **(Rev-01), (Rev-02)**

c. Safety organisation, Safety committees and meetings

Safety officer shall report directly to the head of the projects of the sub-contractor management. There shall be some appointed or nominated **safety stewards** from each sub-group like shuttering, bar-bending, concreting, brick work, material handling, structure erection, cable laying, pipe work, maintenance, batching plant, housekeeping, etc.

A **safety committee** shall be formed including members from different agencies, BHEL and customer covering at-least 50% participation from workers. Safety committee shall meet on weekly basis or as may be decided by customer, outcomes shall be complied as committed.

d. Personal Protective Equipment.

Unless mentioned otherwise, there will be three mandatory PPEs- Safety shoes, Safety Helmet and Reflective jackets conforming to relevant IS codes as mentioned above. Every person entering in the project premises shall use above mandatory PPEs.

There will be other PPEs too, based on the work requirement like: Twin lanyard full body harness, fall arresters and life lines for height workers, Face shield for welders and grinders, Induction helmets and Electrical resistant shoes with FRP/PVC toe for electricians and commissioning engineers, Gum boots for concrete workers and manual excavators, Goggle for gas cutters and grinders, Aprons for welders, shoulder pads for material handlers, Hand gloves – Leather for binders/welders/grinders, certified Rubber gloves for electricians, PVC for concrete/cement

handlers, cotton-housekeeping team/brick coolies/erectors, cable laying men and other material handlers. Dust mask for cement handlers.

e. Material Handling

BHEL as a policy discourages continuous manual handling. Material handling contributes a major portion in the project and hence proper means (mechanical/ electrical powered) should be deployed appropriately for this work. Cranes/Faranas/hydras should not be used for material transportation for long distances(>100m), if such movement is un-avoidable, it must be accompanied by a trained signal man. Long materials should be guided by tagline. Roads for material movement should be free from obstructions. Lifting appliances must be in good condition and must have test/inspection certificates.

Lifting tackles like- D-shackles, chains, ropes, slings, belts shall be periodically inspected and shall have valid test certificate and/or third-party inspection certificates.

Painted/galvanized structures/materials to be lifted by adequate capacity nylon belts only.

If a machine undergoes a major maintenance, fresh TPI shall be required before use.

Hydraulic/pneumatic machines shall be free from leakages. Daily checklist to be filled and witnessed by the concerned supervisor before start of the work.

f. Vehicle/Machinery Documents and other safety requirements

- Crawler mounted boom cranes/Tyre mounted telescopic cranes/tower cranes
 1. Valid third-party inspection certificate.
 2. Valid Insurance policy
 3. Registration Certificate (if applicable)
 4. Valid Pollution under control (PUC) (if applicable)
 5. Fitness certificate from RTO (if applicable)
 6. Operator's valid license, experience and/or competence certificate.
 7. Swing horn
 8. Reverse horn
 9. Boom aviation light
 10. Approved Load chart (inside cabin)
 11. Fire extinguisher (inside cabin)
 12. First aid kit (inside cabin)
 13. Boom angle indicator
 14. Hook Latch
 15. Reflector strips on around cabin and on boom
- Loader backhoe (JCB), crawler excavators (Poclain), Hydra,
 1. Valid third-party inspection certificate.
 2. Valid Insurance policy
 3. Registration Certificate (if applicable)
 4. Valid Pollution under control (PUC) (if applicable)

5. Fitness certificate from RTO (if applicable)
6. Operator's valid commercial license, experience and/or competence certificate.
7. Reverse horn
8. Approved Load chart (inside cabin) (Hydra)
9. Fire extinguisher (inside cabin)
10. First aid kit (inside cabin)
11. Hook Latch (Hydra)
12. Reflector strips on around cabin and on boom

- **Tipper, Transit mixtures (TM), Self-loading concrete mixture (Ajax Fiori), Tractors**

1. Valid third-party inspection certificate.
2. Valid Insurance policy
3. Registration Certificate
4. Valid Pollution under control (PUC)
5. Fitness certificate from RTO
6. Operator's valid commercial Heavy license, experience and/or competence certificate.
7. Reverse horn
8. Fire extinguisher (inside cabin)
9. First aid kit (inside cabin)
10. Reflector strips on around cabin and on body

Note: 1. Tractors may be allowed with Light Commercial/non-commercial license on customer's consent.

- **Cars, Taxis, scooters, motor cycles and other public carriers**

- Valid 2/4-wheeler license (as applicable- commercial/non-commercial)
- Registration Challan
- Valid Insurance
- Pollution under control

g. Man-lifts (Cherry pickers), Scissors Lifts

1. Trained operator with experience/competence certificate and license
2. Valid third-party inspection certificate.
3. Valid Insurance policy
4. Registration Certificate (if applicable)
5. Valid Pollution under control (PUC) (if applicable)
6. Swing horn
7. Reverse horn
8. Boom aviation light
9. Fire extinguisher (inside cabin)
10. First aid kit (inside cabin)
11. Reflector strips on around cabin and on boom

Note:

1. No one shall ride man-lift bucket without safety belt, safety shoes, helmet and reflective jacket.
2. Not more than 3 persons at a time will board in bucket of man-lift (without any heavy materials) including operator.
3. Operator will not leave the machine while persons are elevated and working.
4. No one other than the authorised operator will operate the man lifts/Scissors lifts.

h. Excavation

Prior permission/clearance from customer is a must for excavations in areas where underground service services such as gas/water/oil/chemical/electrical lines may be routed. Due precautions shall be taken during excavation in such area. Excavations near water bodies (ponds/canals etc.) shall be done with sand/soil bags ready to plug water from accidental damaged/burst of edges. All the excavations shall be done by either step cutting (min. 600mm step at every 1.5m depth) or slope cutting at 1:2(X:Y axis) (or greater depending upon the soil condition). Where step cutting/slope cutting is not possible due to space constraints, shoring/shuttering or sheet piling to be used to check collapse of soil.

Excavated soil shall be stacked away from edge of the pit, at-least 1.5 meters or half of the depth whichever is higher. Height of the stack shall not exceed 2m in height.

Ramps shall be provided for access of the workers in large pits and ladder of metal/good built for small pits. Ladders shall be of sufficient length protruding at least 1m above the ground level.

Pumps of adequate capacity shall be available for pumping out of water. No lone worker shall be allowed to work in any excavation. Overloaded vehicle shall not be allowed near excavated pits.

i. Bar bending and Binding

Bar bending machine shall be installed under shed/roof. It shall be properly earthed and maintained for operation. Housekeeping of the area shall be team's responsibility on daily basis. All be bar benders shall be given hand gloves (leather/cotton) in addition to mandatory PPEs. Scrap shall be segregated and moved to scrap yard on regular basis. Bar bending station shall be located away from Main plying roads/passages. The station shall be well illuminated, shall have a maintained first aid kit and potable water. Station shall be located in such a way that the movement of the material be minimised.

j. Concreting

No electric vibrators shall be allowed to use. All the concrete workers shall be issued gum boots, safety helmets, reflective jackets and PVC hand gloves. Free fall of concrete from chute shall not exceed 1m in height. Heavy machineries/ vehicles shall be kept at least 2m away from the edge. Emergency vehicle shall be available near concreting work. Late night works shall be avoided, if it is unavoidable, a prior permission from BHEL/Customer is mandatory.

k. Welding, Gas Cutting & other hot works

Welding: Only experienced welders should be deployed for welding jobs. Welders shall be provided with apron, hand gloves, arm pads, leg pads, face shield and safety shoes. Welding leads shall be joint less and insulated. Power input point shall be fully covered at machine.

Gas cutting: If LPG is being used, domestic cylinder is strictly prohibited inside the project premises, (not allowed for site kitchen too). Hose pipes shall be in good condition without cracks, cuts, punctures or joints. Ends should be clamped with worm clamps. Dial gauges shall be of good quality and duly calibrated. Flash back arresters is a must for both oxygen/acetylene or LPG/Oxygen combination. Cylinders shall be stored, transported and used in vertical position only. When not in use, they shall be capped. Empty and filled cylinders to be stored separately with distinct marking. Cylinders shall neither be rolled on the ground nor thrown during loading/unloading.

Grinding: Grinder shall be given clear glass face shield, apron, safety shoes, ear muffs and hand gloves. Grinder machines shall have wheel guard. Plug tops to be used for power connection preferably three wire type. Only trained persons shall be allowed to use grinders, abrasive cutters. Electrical connection shall be free from cuts, joints etc.

l. Erection & Height Work

Only trained filters and experienced helpers shall be engaged in erection work. Step bolts of lattice towers shall be checked for full tightness with spring washers before use. Height pass shall be issued to the identified group of erectors who have passed medical test and have working experience at height. Name of such workers shall be displayed at appropriate place. These workers only shall be allowed to work at height. Height work shall not be permitted in high wind/bad weather condition, during raining or in night/dark.

m. Electrical Safety

BHEL usually provided single point power source and sub-contractors draw power from there. Otherwise agencies make their own arrangement for construction power like DG sets etc. Sub-contractors shall submit their load requirement (amperage & phase) to BHEL before start of work. Accordingly, they shall make arrangements to draw power and distribution arrangements too in a safe way. MCCBs and HRC fuses to be put in circuit for short circuit and overload protections and RCCBs of 30mA sensitivity to be put at each distribution panel for human safety. Earthing pits shall be installed at each distribution point and maintained below three Ohm resistivity which shall be inspected randomly. The distribution points shall be clean, free from vegetation and water logging, easily accessible and covered/protected from three sides and top for rain. Earthing of DBs shall be done by 25x3mm GI flats connected from proper earth pits. Insulation mat, PVC Sheet/Wooden plank to be placed before DBs as platform. DB Sheds shall be legibly marked with name of agency, contact no of electrician and SLD of that DB. Only industrial plugs and sockets shall be allowed. Three wire (Phase, neutral and earth) system shall be used for tools, lights and machineries and two wire power draws shall be strictly prohibited. PTW and LOTO system shall be maintained to work on LT system. Name and contact no of authorised electricians who will be responsible of electrical power facility maintenance shall be submitted to BHEL by Agencies. Unauthorised sharing of power from one agency to other is strictly prohibited. Electricians shall use standard PPEs and insulated

tools only. Standard and tested/certified discharge rods to be used in the areas where there is a possibility of residual current or induction charge. The induction rod to be connected to the earth first and removed in the last. Induction helmets only to be used in the charged area. Electricians to be provided with electrical resistant safety shoes having FRP/PVC toe.

n. Dust Gases and fumes

Sub-contractor shall make arrangements to avoid accumulation of dust fumes and gases. Cement handlers inside store or at batching plant and gravel spreader shall be given effective nose masks and jaggery (at least 200g per person per day). DG sets and other machineries like cranes excavators etc. shall have valid and effective PUC certificate and shall have maintained engine with silencer. No IC engine operated machine shall be used in confined and covered area like hall, sheds, store etc. where accumulation due to lack of ventilation can increase to harmful levels. Dedicated arrangements (tanker or tractor with sprinkler) shall be made by the sub-contractors (individual or jointly) to continuously subside the dusts arising out of the movement of the vehicle's roads/passages. Welding activities near roof accumulates harmful gases. Welders in such positions shall be provided with effective masks conforming to IS standards.

o. Vehicular Traffic

Speed limits defined within the premises shall strictly be followed by the drivers/commuters of construction as well as other vehicles.

Every construction machinery, man-lift shall display the name, contact no and passport size photograph of the authorised operator (There can be one or more authorised operators).

No one other than operator and co-operator shall sit inside the cabin of any construction machine while it is working.

Construction machineries (tractor, trucks, tippers, JCBs, hydra, Fassi cranes etc. shall never be used as mode of public transport. Machineries like Ajax Fiori and hydra shall not be driven in back direction except for small distances. No overloaded vehicle shall be permitted entry in the project premises.

Over speeding shall be reported and driver/operator shall be barred from entry or shall be penalised.

Drunken drivers shall be barred from entry in the project.

Carrying harmful weapons like knives (>6"), guns etc. shall permanently disqualify the person from entry in project premises.

p. Barricading and floor openings

Every pit deeper than 4 feet (1.2m) shall be barricaded immediately after excavation and will remain barricaded till backfilling.

Pits/trenches drains near roads, passages whether temporary or permanent shall be hard barricaded and well illuminated. Roof edges and openings shall be strictly hard barricaded and illuminated. Height works like masonry works, structure erection, erection by cranes, Lattice tower/beam erection areas shall be barricaded to restrict entry. Areas under charging/commissioning shall be barricaded and caution boards shall be displayed on newly charged areas.

q. Scaffold & Ladder

No bamboo/wooden scaffold shall be allowed to be used. Only tubular steel scaffolds with couplers conforming to the relevant IS codes shall be allowed with base plates. Standard steel or wooden planks to be used as platforms and no packing materials shall be used. All the platforms shall be built with provisions of **top rail at 1m height, mid rail at 0.5m height and toe boards of min 6" height** at floor level. Minimum width of platform shall be 900mm and if wheel barrow is to be used then 1200mm. Means of access to be provided in the form of ladders, ramps or staircase. Multilevel work platforms or those platforms having passage underneath shall be provided with safety net, screen or canopy at each level for protection from falling objects. Platforms shall be free from concrete, debris or other materials. Platforms shall not extend out of the putlogs and shall be secured and fastened. Decking shall be made non-skidding.

Scaffolds under erection shall be tagged **"RED"**, under repair/maintenance/inspection shall be tagged **"YELLOW"** and ready for use shall be tagged **"GREEN"**

Only metal ladders in the construction site and FRP ladders in charged areas shall be allowed. Ladders made from packing materials shall not be used. Ladders shall be securely fixed at bottom, top and long ladders at middle points too at an interval not more than 2400mm and must have a landing at every 6m. Inclination angle should be approximately 1:4 (X:Y) or 75deg. Ladder must extend at least 1m above the platform/access area. Gap between two rungs shall not exceed 300mm. Portable ladder should not be more than 4m in length. Minimum width of the ladder shall not be less than 300mm.

Use of Mobile aluminium scaffold is preferably advisable for erection of transformers/reactors.

r. Illumination

The sub-contractor shall ensure that the areas such as work stations, buildings, batching plants, passages/roads, stores, rest areas, power sources, staircases etc. are illuminated sufficiently to make safe work conditions at site and shall not be less than the relevant IS standards. Excavations/ below ground level structures near passages/roads shall also be sufficiently illuminated.

s. Safety banners/posters, caution boards

Sub-contractors shall display boards and banners in sufficient quantity having safety signs, slogans, important messages, pictures, cautions at prominent locations to promote safety and spread awareness for important precautions such as "Deep Excavation Ahead", "Speed Limit", "Charged Area", "Do not operate", "Hard hat area", "No smoking Zone" etc. Boards containing messages of Emergency contacts, First aid facility, rates of minimum wages, working hours, rest day etc. should be displayed at specific areas.

t. Waste management and disposal

Sub-contractor shall make suitable and effective arrangement to remove waste material from site on regular basis and store them in an identified and safe location. Disposal of wastes shall also be done as per manufacturer's instructions or as per the guidelines laid by legal authorities. Re-bars, Cement bags, packing material (wooden/metal/plastic/paper), paint, oil, grease, cables (armour, sheathing, insulation),

civil debris, metal chips, GI sheet scraps, batteries etc. are the common waste materials. Sub-contractor shall arrange disposal of the hazardous wastes/materials in conformance to the legal and contractual requirements only.

u. Inspection of PPEs, T&Ps, Machineries and lifting appliances

All the PPEs, T&P and lifting appliances purchased newly by sub-contractors shall have test certificates which shall be submitted to BHEL office periodically or on demand. There shall be at least monthly joint inspection schedule for inspection of healthiness of all the PPEs, T&Ps and lifting appliances. All the lifting appliances shall be tested and examined by a competent person before taking into use for the first time or after it has undergone any alterations or repairs liable to affect its strength or stability

and also once at least in every twelve months. To confirm quality of the PPEs as per the relevant IS codes, BHEL may ask sub-contractors to get any or all types of PPEs tested through NABL approved lab as per relevant IS codes. At any stage, the 100% cost of such tests shall be in the scope of respective sub-contractors.

v. Cable Laying

Sub-contractor shall ensure cable trenches free from water, mud, debris, snakes, Scorpios, lizards before start of the work in trenches. Cable drum rollers shall be used to pull cables out of drums to avoid twisting of cables. Hand gloves, Safety shoes/gum boots, reflective jackets, safety helmets shall be provided to the workers. Cable laying area shall be well illuminated.

w. Fire Protection

Every sub-contractor has to maintain their working area, store and office area free from bushes. Stacking of flammable materials like wood, paper, plastic, paint, oil, grease, fuel, cotton, gases etc. at isolated place disconnected from other storage and office areas. Adequate arrangements of firefighting means like suitable extinguishers, fire/water buckets, water tanks, sand dunes etc. shall be made by the agency depending upon the fire capacity assessed or as per MSDS. Fire drills and trainings on how to operate fire extinguishers and how to react in case of fire breakouts shall be the part of regular training program. Guards and store persons must be a regular participant of such training programs. A list of trained firefighting persons and periodicity of such training programs shall be submitted to BHEL by every agency and same to be adhered. Sufficient number of fire extinguishers with suitable class shall be placed at such locations where there can be fire hazard like stores, pantry, office, DG set, electrical distribution panels etc.

x. Fencing of exposed rotating parts

Exposed rotating parts poses great threat to the person in vicinity. Such parts need to be fenced/covered. Guards are mandatory of grinders, abrasive cutters. Flywheels of the engines of heavy machines, Diesel engines, DG sets need to be covered. Electric winch machines, pulleys, chains, shafts, exhaust fans at reachable height, table fans, need to be caged/fenced. Such fencing/guard shall not be removed while machinery is in operation.

y. Emergency preparedness response plan and periodic mock drills.

Sub-contractor shall comply JSA (Job Safety Analysis) and arrange to mitigate the effects of identified possible hazards. He shall also define following in response to emergency preparedness:

An emergency assembly point and put a board of the same with information to all in induction training.

Have facility of ambulance or tie-up with nearest hospital for service in minimum possible time (Max-30min) if there is not ambulance inside the premises.

Ensure availability of emergency vehicle with driver all the time at site during work.

Conduct mock-drills on possible risks like electrocution, fall from height, fire, heat stroke etc., record responses and take photographs to submit in BHEL office. Stretchers availability in emergency vehicle or at work place should be well accessible. Provide fire extinguishers of right type at right place in right quantity with information to all. Display emergency contact nos. to various risk locations and at office, service building or at major work locations. Provide first aid training by doctors for and display names of such trained first aiders and fire fighters. Rescue kit with trained staff or man lift or both to rescue a man hanging by safety belt at height. Provide running water tap near chemical storage and handling points. Agencies shall follow emergency response plan prepared by BHEL in each area of work, store and office.

z. Safety reports & Reporting of accidents

BHEL will provide "formats and checklists" for the purpose of records/documents pertaining to the compliance of aforesaid clauses. Agencies shall be responsible for strict adherence and compliance for timely generation and fill-up of the checklists and reports. These shall be submitted on weekly and monthly basis as specified in the formats.

Agency shall also promote such an environment that the near misses, incidents and accidents are reported by every person, whosoever witnesses them. These shall help in analysing the trend and taking measures in reducing/stopping the accidents/incidents. Initial reporting can be in any form-by call, SMS, WhatsApp, e-mail, letter etc.

Major and fatal accidents or high potential incidents shall be investigated for root cause and outcomes shall be immediately implemented to check recurrences.

6. General conditions and penalty clauses

Following are the general conditions:

PPEs shall not only bear the ISI mark but also be conforming to the required standards, 100% compliance of the PPEs is mandatory.

Over speeding of vehicles shall attract penalty/notice and recurrence will attract debarring from entry into project premises.

Hiding of facts like incidents, accidents, fake/forged reports/certificates shall also attract penalty/ notice or both. Only approved third party agencies shall be allowed to inspect the machines, T&Ps. Reports shall directly be sent to BHEL/customers by the third parties.

Insurance and TPIs to be renewed before expiry. Machines, T&Ps shall not be allowed to work if renewal delayed. Continuity of WC policy to be maintained religiously by the respective agencies.

Agency shall submit the status report of his labour license, BOCW registration, WC Policy, insurance & TPI validity on monthly basis with list of machineries and T&Ps

Sub-contractors shall also maintain a buffer stock of all the PPEs in at least 20% excess to the present strength of the work force.

If construction power is not drawn as per the guidelines laid in clause no. 5(m), given above, BHEL may take-up this work at the risk and cost of the agency and/or may withhold a sum of min. Rs. 50,000/- (Rs. Fifty Thousand) or more as the site in-charge deems fit till the system is aligned as per aforesaid requirement.

Agencies shall be responsible for the compliance of the above requirements. Failure in one or more clauses/area shall attract a notice or monetary penalty or a combination of above.

Monitory penalty will be

- Rs. 1000/- per person/incident per day for non-conformity in above areas.
- A Major/severe accident shall attract a penalty of Rs. 2,00,000/- per head
- Fatality or permanent disability with total loss of earning capacity, if any, will attract a penalty of Rs. 5,00,000/- (Rs. Five Lakh).
- Further fatality/permanent disability shall attract double the last penalty imposed on the agency.
- Above penalties are exclusive of medical expenses of the victim or compensation to the family through insurance policy (WC Policy or group insurance).
- **Penalties imposed by customer shall be fully transferable to the sub-contractor. In the event of above cases, penalties shall be imposed whichever will be higher.**
- Evaluation of agency's performance on HSE compliance shall be done as per BHEL guide lines/system.

Revision History

Revision Date	Revision No.	Old Text	New Text	Reason	Revised by (with sign)
03.05.2019	00	N/A	Full Document	New Release	
12.10.2021	01	Nil	Attend HSE familiarization program at TBG-HQ with his site management team. This will be a half day long awareness session on HSE requirements and compliances which the agency is supposed to fulfil during contract execution at site. The session shall be taken by TBG HSE department on intimation by TBSM. (at page no. 5)	For better understanding of HSE requirements to agency. (HSE Review meeting dated 23.08.2021)	
12.10.2021	01	Edition	Inclusion of penalty provisions in case of non-deployment of safety person(page-8)	Introduction of HSEP-14	
17.01.2024	02	Edition	Appointment and duties of qualified safety officer (Page-8)	As per BOCW 1996	

-:End of Document:-

BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS GROUP,
NEW DELHI



CONDITIONS OF CONTRACT
FOR
ERECTION WORKS

DOC. NO. – TB-ETC-GCC,REV.-02
20th JUNE, 2005

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

INDEX

S.No.	Description	Page No.
A.0	GENERAL INSTRUCTIONS TO TENDERERS	05 – 31
A.1.0	Procedure for submission of Sealed Tenders	6
A.2.0	Procedure for evaluation of Price Bids	6
A.12.0	Data to be enclosed	8
A.13.0	Earnest Money Deposit	9
A.14.0	Authorization and Attestation	10
A.15.0	Validity of Offer	11
A.16.0	Execution of Contract	11
A.17.0	Security Deposit	11
A.19.0	Rejection of Tender and Other conditions	14
Annex-A	Details of work executed/ Being Executed	17
Annex-B	Proposed Manpower	18
Annex-C	Status of Tools, Plants and Instruments	19
Annex-D	Analysis of Unit Rate	20
Annex-E	Declaration sheet	21
Annex-F	Checklist and Schedule of General Particulars	22
Annex-G	Deleted.	
Annex-H	Contract Agreement	23
Annex-I	Form of BG for Security Deposit	25
Annex-J	Proforma for Performance Guarantee	27
Annex-K	Revised offer in lieu of Deviation withdrawal	30
Annex-L	BG confirmation letter from Banker	31
B.0	GENERAL TERMS AND CONDITIONS	32-61
B.1.0	Definitions	33
B.2.0	Law governing the contract and Court Jurisdiction	35
B.3.0	Issue of Notice	35
B.4.0	Use of Land	36
B.5.0	Commencement of Work	36
B.6.0	Measurement of work and Mode of Payment	36
B.7.0	Rights of BHEL	38
B.8.0	Responsibility of Contractor in respect of local laws	40
B.9.0	Responsibility of Contractor in respect of Safety	44
B.10.0	Consequences of Cancellation	47
B.11.0	Insurance	48
B.12.0	Strikes and Lockouts	48
B.13.0	Force Majeure	49
B.14.0	Guarantee	49

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

B.15.0	Arbitration	50
B.16.0	Variations and Valuations of variations	51
Annex-M	Programme of Work	54
Annex-N	List of Test Equipment	54
Annex-P	Activities for Testing and Commissioning	58
Annex-Q	List of Tools and Tackles	61
C.0	SPECIAL CONDITIONS OF CONTRACT	63 - 76
C.1.0	Qualification of Contractor	64
C.2.0	Terms of Payment	65
C.3.0	Security Deposit	66
C.4.0	Performance Guarantee	67
C.5.0	LD/Penalty for Delay in Execution	67
C.6.0	Receipt/Unloading etc. at site	68
C.7.0	Facilities to be provided by contractor	68
C.8.0	Testing and Commissioning	68
C.9.0	Completion of Contract	70
C.10.0	Trial Operation and Handing over	70
C.11.0	Additional Expenditure	71
C.12.0	Splitting the work	71
C.13.0	Supply of Material	71
C.14.0	Electricity and Water	72
C.15.0	Insurance	73
C.16.0	Escalation/Price Variation	73
C.17.0	Over run charges	73
C.18.0	Construction Schedule	73
C.19.0	Heavy material handling Equipment	73
C.20.0	Calibrated Test Instruments	73
C.22.0	Protection of Work	74
C.23.0	Safety Measures	74
C.24.0	Quality Records	74
C.28.0	Working Hours	75
C.29.0	Division of Work	75
C.30.0	Income Tax/Sales Tax/Works Tax	75
C.31.0	Discrepancies and Adjustment of Errors	76
D.0	ERECTION CONDITIONS OF CONTRACT	78-94
D.1.0	General	79
D.2.0	Regulation of Local Authorities & Statutes	79
D.3.0	Owner's Lien on Equipment	80
D.4.0	Re-works etc.	80
D.5.0	Access to site and works on site	80
D.6.0	Contractors Site office Establishment	80

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.7.0	Co-operation with other contractors	81
D.8.0	Discipline of Workmen	81
D.9.0	Contractors Field Operation	82
D.10.0	Photographs and Progress Reports	82
D.11.0	Manpower Report	83
D.12.0	Protection of Work	83
D.13.0	Employment of Labour	83
D.14.0	Facilities to be provided by Owner	84
D.15.0	Facilities to be provided by Contractor	84
D.16.0	Lines and Grades	85
D.17.0	Fire Protection	86
D.18.0	Security	86
D.19.0	Contractors Area Limits	87
D.20.0	Contractor's co-operation with Owner/BHEL	87
D.21.0	Pre -commissioning Trials and Initial Operation	87
D.22.0	Material handling and Storage	88
D.23.0	Construction and Arrangements	90
D.24.0	Field Quality Plans and Records	91
D.25.0	Contractor's Material brought to site	91
D.26.0	Protection of Property and Contractors liability	92
D.27.0	Painting	92
D.28.0	Protection of Monuments and Reference Points	92
D.29.0	Work and Safety Regulations	93
D.30.0	Electrical Safety Regulations	93
D.31.0	Consumables	94
D.32.0	MS and Aluminium Welding	94
E.0	SCOPE OF WORK AND COMPLETION SCHEDULE	96-106
E.1.0	Scope of work	97
E.2.0	Erection, Testing and Commissioning Requirements	100
E.3.0	Method of workmanship and Quality of work	101
E.4.0	Equipment, Material and Services to be provided	102
E.5.0	Testing and Commissioning Equipment	104
E.6.0	Preparation for Commissioning	104
E.7.0	Minor Civil works	105
E.8.0	Price Schedules	106
E.9.0	Start of work and completion schedule	106
E.10.0	Schedule of Equipment	106

SECTION- A

GENERAL

INSTRUCTIONS TO

TENDERERS

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION - A

GENERAL INSTRUCTIONS AND INFORMATION FOR TENDERER

A.1.0 : PROCEDURE FOR SUBMISSION OF SEALED TENDERS

Please refer Annexure to the Conditions of Contract for Erection work attached with the tender documents

PART - II (PRICE - BID) COVER - II:

Rate/Price Schedule only shall be given in this part - II "Price Bid".

A.2.0 : PROCEDURE FOR EVALUATION OF PRICE BID

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS" attached with the tender document

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.3.0

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

A.4.0

A.5.0

A.6.0

A.7.0

A.8.0

A.9.0

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.10.0

A.11.0

A.12.0

A.12.1

A.12.2

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

A.12.3 Three years financial turn over (certified), present commitments with all orders in hand, value of total order, value completed, and balance with completion dates as per Annexure-A.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.12.4 ORGANISATION CHART & MANPOWER DEPLOYMENT:

The organisation pattern and the manpower that are totally available with him & that will be deployed by the tenderer for this work in the form of month wise and category wise deployment plan duly indicating the number of Engineers, Supervisors, Skilled and Unskilled Workers etc. as per proforma at Annexure-B shall be submitted.

- A.12.5 A list of machines, tools and plant that the tenderer is having and those that will be deployed on this job giving proof of ownership or any tie-up of equipment as per proforma enclosed at Annexure-C.
- A.12.6 Analysis of unit rate quoted as per proforma enclosed at Annexure-D.
- A.12.7 Declaration sheet as per proforma enclosed at Annexure-E.
- A.12.8 Checklist as per proforma enclosed at Annexure-F.
- A.12.9 Certificate from schedule Bank to prove his financial capacity to undertake the work or solvency certificate from the concerned Government Authority.
- A.12.10 A certificate of Income Tax/Sales Tax verification from the appropriate authority in the forms prescribed duly indicating annual turnover. These certificates shall be valid for one year from the date of issue or for the period prescribed therein for all tenders submitted during the period.
- A.12.11 In addition to the above, the particulars required elsewhere in the tender documents.
- A.12.12 NOTE: In terms of clauses A.12.1 to A.12.11 above, all the data required to be enclosed with the tender need to be furnished neatly typed, signed & stamped in the given formats only (in the form of separate sheets) failing which the tender may be considered as incomplete and is liable for rejection. Documentary proof wherever necessary also need to be enclosed.

A.13.0 EARNEST MONEY DEPOSIT

- A.13.1 Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.13.2

A.13.3

A.13.4

A.13.5 Please refer " Annexure to conditions of contract for ETC Work"
attached with the tender documents.

A.13.6

A.13.7

A.13.8

Above clause No. A.13.0 stands deleted. Please refer Annexure to conditions of contract for ETC works.

A.14.0 **AUTHORISATION AND ATTESTATION:**

A.14.1 Tenders shall be signed by persons duly authorised / empowered to do so. Certified copies of such authority and relevant documents shall be submitted along with the tenders.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.15.0 VALIDITY OF OFFER:

A.15.1 THE OFFER SHALL BE KEPT OPEN FOR ACCEPTANCE FOR A MINIMUM PERIOD OF FOUR MONTHS FROM THE DATE OF OPENING OF TENDERS. In case the BHEL calls for negotiations, such negotiations shall not amount to cancellation or withdrawal of the original offer which shall be binding on the tenderer.

A.16.0 EXECUTION OF CONTRACT :

A.16.1 The successful tenderer's responsibility under this contract commences from the date of issue of the Letter of Intent by BHEL. The successful tenderer shall be required to execute an agreement in the prescribed form as per Annexure-H with BHEL within a reasonable time after the acceptance of his tender and in any case before submitting the first bill for payment. The expenses for completion, stamping and registration of the agreement with prescribed authority if necessary, shall be borne by the contractor.

A.17.0 SECURITY DEPOSIT:

Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

A.17.1

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

e)

f)

Please refer " Annexure to conditions of contract for ETC Work"
attached with the tender documents.

g)

h)

i)

j)

k)

l)

Note

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.17.2

Please refer " Annexure to conditions of contract for ETC Work" attached with the tender documents.

A.17.3

A.17.4

A.17.5

A.17.6

A.17.7

Above clause No. A.17.0 stands deleted. Please refer Annexure to conditions of contract for ETC works.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.19.0 **REJECTION OF TENDER & OTHER CONDITIONS:**

A.19.1

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

A.19.2

A.19.3

A.19.4

A.19.5

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

A.19.6

A.19.7

A.19.8

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

A.19.9

A.19.10

A.19.11

A.19.12

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

- A.19.13 The tenderers must go through Annexure 'Q' of Section-B which details out the List of Tools, Tackles & Calibrated Test Equipments to be arranged by ETC contractor together with special purpose instruments which can be provided by BHEL free of cost for execution of work provided the same is informed to BHEL on award of contract.

Also, Annexure 'Q' gives the details of specialised Services which can be provided by BHEL for system commissioning on NO CHARGE basis with advance intimation to 'ENGINEER' in this regard. The tenderer must also see Clause E.4.2 & E.6.3 of Section E for more details.

- A.19.14 IT WOULD BE PREFERRED THAT YOUR OFFER IS WITHOUT ANY DEVIATION w.r.t. TENDER SPECIFICATIONS AND THE SAME MAY BE CLEARLY MENTIONED ON THE COVERING LETTER ACCOMPANYING THE TECHNICAL BID. Offers with deviations are likely to be rejected. However if the bidder insists on any technical or commercial deviations, from the specification and/or tender conditions, the price implication if any, of withdrawing the deviations must be submitted along with the price bid in a separate sealed envelope superscribed "Price Implication for withdrawal of deviations". No price implication for withdrawal of deviation shall be accepted at a later date, after the opening of technical bid.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - A

DETAILS OF WORK EXECUTED / BEING EXECUTED

A) WORK EXECUTED

SL. NO.	FINANCIAL YEAR	CUSTOMER	DESCRIPTION OF WORK	TOTAL ORDER VALUE	REMARKS

B) WORK BEING EXECUTED

SL. NO.	CUSTOMER	DESCRIPTION OF WORK	TOTAL VALUE	VALUE OF THE PORTION COMPLETED	ACTUAL START DATE	EXPECTED COMPLETION DATE	REMARKS

(SIGNATURE OF TENDERER)
WITH STAMP

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - B

**(A) PROPOSED MANPOWER (ENGINEERS / SUPERVISORS) RESOURCES
FOR EXECUTION OF WORK**

SL. NO.	NAME OF STAFF	QUALIFICATION	EXPERIENCE IN YEARS	REMARKS

(B) MONTH WISE MANPOWER DEPLOYMENT PLAN

SL. NO.	CATEGORY	INDICATE NO. OF PERSONS TO BE DEPLOYED IN EACH MONTH								AND SO ON
		1st	2nd	3rd	4th	5th	6th	7th	8th	

- (C) Total Man-days planned to be deployed for the work :Man-days
Plus man-days for unskilled labour as per site requirement.

**(SIGNATURE OF TENDERER)
WITH STAMP**

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - C

(A) STATUS OF TOOLS, PLANTS & INSTRUMENTS

Sl. No.	Name of Eqpt.	Quantity owned	Registration No. wherever applicable	Documents enclosed for proof of Ownership/Tie-up	Present Location	Quantity proposed to be deployed for this job

(B) MONTH WISE TOOLS, PLANTS & INSTRUMENTS DEPLOYMENT PLAN

Sl. No.	Description of Tools, Plants and Instruments	(Indicate No. to be deployed in each month)							
		1st	2nd	3rd	4th	5th	6th	7th	and so on

(SIGNATURE OF TENDERER)
WITH STAMP

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - D

ANALYSIS OF UNIT RATE

Sl. No.	DESCRIPTION	PERCENTAGE OF THE UNIT RATE	REMARKS
01	Salary & Wages for staff & workers		
02	Materials		
	(a))	
	(b))	
	(c))	
	(d))	
03	Depreciation & maintenance for T & P		
04	Depreciation & maintenance for other items		
05	Establishment & Admn. expenses of site		
06	Overheads		
07	Profit		

(SIGNATURE OF TENDERER)
WITH STAMP

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02**

ANNEXURE -E

DECLARATION SHEET

I hereby certify that all the information and data furnished by me with regard to this Tender Specification No. are true and complete to the best of my knowledge. I have gone through the specification, conditions and stipulations in detail and agree to comply with the requirements and intent of specifications.

**(SIGNATURE OF TENDERER)
WITH STAMP**

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - F

CHECKLIST & SCHEDULE OF GENERAL PARTICULARS

NOTE: Tenderers are requested to fill in the following details and no column should be left blank.

- | | | | |
|-----|--|---|---------|
| 1. | Name & Address of the Tenderer | : | |
| 2. | Telegraphic/telex address | : | |
| 3. | Phone/Fax No. (Office) | : | |
| 4. | Name & designation of the official of the tenderer to whom all the references shall be made | : | |
| 5. | Tenderer's Proposal No. & date | : | |
| 6. | Whether EMD submitted (by cash/ Bank Guarantee/Bank Draft) | : | By..... |
| 7. | Validity of offer/rates quoted for six months from the date of opening of tender | : | Yes/No |
| 8. | Attested copy of power of attorney as per Clause-A.12.1 | : | Yes/No |
| 9. | Solvency Certificate submitted as per Clause-A.12.9 | : | Yes/No |
| 10. | Income Tax/Sales Tax Certificate submitted as per Clause-A.12.10 | : | Yes/No |
| 11. | Details of work executed/being executed as per Annexure-A | : | Yes/No |
| 12. | Monthwise & Category wise manpower deployment plan as per Annexure-B | : | Yes/No |
| 13. | Status of Tools, Plants and Instruments & their month wise deployment plan as per Annexure-C | : | Yes/No |
| 14. | Analysis of unit rate quoted as per Annexure-D | : | Yes/No |
| 15. | Declaration sheet as per Annexure-E | : | Yes/No |
| 16. | Request for registration (for new tenderers) submitted | : | Yes/No |

Date

(SIGNATURE OF TENDERER)
WITH STAMP

WITNESS : (Signature with full particulars)

- 1.
- 2.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - H

CONTRACT AGREEMENT

CONTRACT NO. :
LETTER OF INTENT NO. :
WORK ORDER NO. :

1. The Contract Agreement entered into the day of, 20... (..... day oftwo thousand and.....) at New Delhi between M/S BHARAT HEAVY ELECTRICALS LIMITED, TRANSMISSION BUSINESS GROUP, New Delhi, having it's Registered Office at BHEL House, Siri Fort, New Delhi - 110 049 (hereinafter called the FIRST PARTY which expression shall include their executors, administrators, successors and permitted assigns)

AND

M/S (hereinafter called the SECOND PARTY which expression shall include their executors, administrators, successors and permitted assigns).
2. And whereas the FIRST PARTY called for the offer for the work of..... as per approved specifications, drawings and quality plan at as per Tender Specification No..... , dated
3. Whereas the SECOND PARTY submitted their offer No. dated against above.
4. Whereas the FIRST PARTY has accepted the offer referred to above & issued Letter of Intent No....., dt..... and also detailed Work Order No..... dt
5. Whereas the SECOND PARTY has agreed to work as Sub-Contractor of the FIRST PARTY on the conditions specified in the Tender Specifications at a contract price of Rs.....(Rupees.....)
6. Now, therefore it is hereby mutually agreed to by and between the parties hereto as under :
 - a) The SECOND PARTY shall execute the works of at on the conditions specified in Tender Specifications of FIRST PARTY and Letter of Intent referred to herein before at a total contract price of Rs..... (Rupees))
 - b) That the SECOND PARTY shall organise all activities and mobilisation of facilities so that the work specified herein before is completed byas per the time bound programme mentioned in the Tender Specifications.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- c) That all disputes arising out of or relating to this agreement shall be referred to the sole Arbitrator as per arbitration clause mentioned in the Tender Specifications. The Arbitrator from time to time with the consent of the parties enlarge the time for making and publishing award without reference to the court for the purpose.
 - d) That the jurisdiction in all suits or claims arising out of this agreement shall be of New Delhi Courts only.
 - e) The Following documents shall form part of this agreement :-
 - i)
 - ii)
 - iii)
 - iv)
 - v)
 - vi)
7. Deviation Limit : The contract value is subject to deviations depending upon the actual requirement within plus or minus 30%. Quantities of individual items may vary to any extent or may get deleted.
8. Terms of Payment : The terms of payment applicable to this contract shall be those covered under Point No.... of Work Order dt. and as per Tender Specifications.
9. Abandoning the work : In the event of the SECOND PARTY abandoning the work, FIRST PARTY reserves the right to get the unfinished work done at the risk and cost of the SECOND PARTY.
10. All other terms and conditions shall be as stipulated in the Tender Documents.
11. This contract agreement consists.... pages.
- IT WITNESS WHEREOF, the parties have signed this agreement on the date, month and year first above written in presence of:

For and on Behalf of
(FIRST PARTY)

WITNESS (WITH ADDRESS)

For and on Behalf of
(SECOND PARTY)

- 1.
- 2.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02**

ANNEXURE - I

MODEL FORM OF BANK GUARANTEE (FOR SECURITY DEPOSIT)

1.

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

2.

b)

c)

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

5.

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

6.

7.

NOTE

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - J

PROFORMA FOR PERFORMANCE GUARANTEE
(to be used in appropriate value non - judicial stamp paper)

1. This deed of guarantee made this day of 20... by Bank Limited in favour of Bharat Heavy Electricals Limited, having their registered office at BHEL House, Siri Fort, New Delhi - 110 049.
2. Whereas M/s (hereinafter called the CONTRACTOR / SELLER have entered into a Contract bearing No. dated..... (hereinafter called the CONTRACT) for supply / civil works /erection, testing and commissioning of M/s Bharat Heavy Electricals Limited (hereinafter called the COMPANY).
3. And whereas the said CONTRACT Inter - alia provides that the CONTRACTOR / SELLER shall pay to the COMPANY a sum of Rs. only towards Performance Guarantee in the form and manner therein specified.
4. And whereas the SELLER / CONTRACTOR have approached Bank Limited (hereinafter referred to as the GUARANTOR) and at their request and in consideration of the arrangement arrived at between the CONTRACTOR and the GUARANTOR, the GUARANTOR has agreed to give the Guarantee as hereinafter mentioned in favour of the COMPANY.

NOW THIS DEED WITNESSES AS FOLLOWS:

5. The GUARANTOR by the hand of Mr. and its lawfully and fully constituted attorney and do hereby guarantee the due and faithful performance of the said CONTRACT and do hereby irrevocably undertake and promise to pay the COMPANY without any demur merely on demand made by them a sum not exceeding Rs. only in case the COMPANY sustains any loss or damage by reason of any breach, default by the CONTRACTOR / SELLER of any of the terms, conditions, stipulations or undertakings or any one of them contained in the said CONTRACT and the tender documents attached hereto and for payment of any moneys payable by the CONTRACTOR / SELLER to the COMPANY under the terms and conditions of the said CONTRACT. The decision of the COMPANY regarding the breach, default, loss, damage and payment shall be conclusive and binding in the GUARANTOR, irrespective of the fact whether the CONTRACTOR / SELLER admits or denies such claims or questions its correctness in any court, tribunal or arbitration proceedings or before any other authority.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

6. The COMPANY shall have the fullest liberty without effecting in any way the liability of the GUARANTOR under this guarantee, from time to time to vary any of the terms and conditions of the CONTRACT or extend time by the SELLER / CONTRACTOR or to postpone for any time and from time to time any of the powers exercisable by its against the SELLER / CONTRACTOR and either to enforce or forbear from enforcing any of terms and conditions governing the CONTRACT or securities available to the COMPANY and the GUARANTOR shall not be released from its liability under these presents by any exercise by the COMPANY of the liberty with reference to the matters aforesaid or by reason of time being given to the SELLER or any other forbearance, act or omission on the part of the COMPANY or any indulgence by the COMPANY to the SELLER / CONTRACTOR or of any other matter or thing whatsoever which under the law relating to sureties, would but for this provision have the effect of so releasing the GUARANTOR / CONTRACTOR from its liability under this Guarantee.
7. This Guarantee shall remain in full force and effect and the GUARANTOR shall be liable under the same irrespective of any concession or time being granted by the COMPANY to the CONTRACTOR in or for fulfilling the said CONTRACT and this Guarantee shall remain in full force irrespective of any change in terms and conditions, stipulations or any variations in the terms of CONTRACT irrespective of whether notice of such change and / or variation is given to the GUARANTOR or not and the claim to receive such notice of any change and or variation of the terms / or conditions of the CONTRACT is hereby specially waived by the GUARANTOR.
8. The GUARANTEE herein contained shall not be determined, prejudiced or effected by the liquidation or winding up or insolvency of or change in the constitution of the CONTRACTOR but shall in all respects and for all purposes be binding and operative until all payments or all moneys due or that may hereafter become payable to the COMPANY are paid in respect of any liability or obligation of the CONTRACTOR under the CONTRACT.
- b) The GUARANTOR further agree that the Guarantee herein contained shall remain in full force and effect during the period that would be taken for the commencement of the CONTRACT till end of the CONTRACT and its claim satisfied or discharged and till the COMPANY certified that the terms and conditions of the CONTRACT have been fully and properly carried out by the SELLER and accordingly discharges this guarantee, subject, however, that the COMPANY shall have no claim under this Guarantee after months from the date of completion of the Guarantee has been served on the GUARANTOR before the expiry of the said period in which case the same shall be enforceable against GUARANTOR notwithstanding the fact that the same is enforced after expiry of said period.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

The GUARANTOR undertake not to revoke this Guarantee during the period it is in force except with the previous consent of the COMPANY in writing and agree that any liquidation or winding up or insolvency or dissolution or any change in the constitution of the SELLER or the GUARANTOR shall not discharge the GUARANTOR's liability here under.

It shall not be necessary for the COMPANY to proceed against the SELLER before proceeding against the GUARANTOR and the Guarantee herein contained shall be enforceable against them notwithstanding any security which the company may have obtained or obtained from the SELLER shall at the time when proceedings are taken against the GUARANTOR here under be outstanding or unrealized.

The GUARANTOR hereby declares that it has power to execute this Guarantee and the executant has full powers to do so on its behalf under the proper authorities granted to him / them by of the guarantor.

10. Notwithstanding anything herein before contained, our liability under this Guarantee is restricted to Rs. (Rupees only) and will expire on and unless a claim in writing is presented to us or an action or suit to enforce the claim is filed against us, within six months from the date, all our rights shall be forfeited and we shall be relieved and discharged from all our liabilities thereunder.

IN WITNESS whereof the (Bank) have hereunto set and subscribed their hands the day, month and year first above written.

**SIGNED FOR AND ON
BEHALF OF THE BANK**

WITNESS:

NAME AND ADDRESS

SIGNATURE

1.

2.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - K

**REVISED PRICE OFFER IN LIEU OF WITHDRAWAL OF DEVIATIONS/
CLARIFICATIONS OFFERED BY BHEL DURING TECHNICAL DISCUSSION**

Sl. No.	Clause Ref.	Description of Deviation/ Clarification	Whether Increase/ Decrease in Price	Unit Rate (if applicable)	Total Increase/ Decrease	Remarks

NOTE: Total increase or decrease in total price shall be indicated either in percentage or in value (Rs.).

**(SIGNATURE OF TENDERER)
WITH STAMP**

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE -L

(On Bank's Letter Head)

To,
AGM(Finance)
Transmission Business Group,
Block-VI, Central Annexe, IInd Floor,
Bharat Heavy Electricals Ltd.
Bhopal – 462 022

Ref & Date

Sub : Confirmation of Bank Guarantee no. <<BG No.>>

We are a Scheduled Bank other than Co-operative sector Bank under the RBI Act 1934. The aforesaid << BG No.>> for Rs. <<BG Amount>>/ (In Words Also) and valid up to <<validity date>> is issued by us on behalf of M/s << Beneficiary's Name>> in favour of BHARAT HEAVY ELECTRICALS LTD.

The format of the Bank guarantee is strictly as per the format prescribed by M/s BHEL and the stamp papers forming part of the BG are as per the state rules extant.

The signatures to the Bank Guarantee are duly authorised.

Thanking you,

For & On behalf of
Name of the Bank & Seal

(Please Sign here)

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION-B

GENERAL TERMS AND **CONDITIONS**

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION - B

GENERAL TERMS AND CONDITIONS

- B.1.0 The following terms shall have the meaning hereby assigned to them except where the context requires otherwise:-
- B.1.1 BHEL (or B.H.E. Ltd.) shall mean Bharat Heavy Electricals Limited, a Company registered under Indian Companies Act 1956, with its Registered Office at BHEL House, Siri Fort, New Delhi-110 049 or its Authorised Officers or its Engineer or other Employees authorised to deal with any matters with which these persons are concerned.
- B.1.2 "GENERAL MANAGER" shall mean the Officer in Administrative charge of the Contracting Unit of BHEL.
- B.1.3 "ENGINEER" OR "ENGINEER-IN-CHARGE" shall mean Engineer deputed by BHEL. The term includes "Deputy General Manager, Construction Manager, Resident Engineer, Assistant Site Engineer of BHEL/at the site as well as the officers in charge at Head Office.
- B.1.4 "SITE" shall mean the place or places at which the plants/equipments are to be erected and services are to be performed as per the specification of this tender.
- B.1.5 "CLIENTS OF BHEL" or "CUSTOMER/OWNER" shall mean the organisation to whom BHEL is responsible for this work.
- B.1.6 "CONTRACTOR" or "ETC CONTRACTOR" shall mean the individual, firm or Company who enters into this Contract with BHEL and shall include their executors, administrators, successors and assigns.
- B.1.7 "CONTRACT" or "CONTRACT DOCUMENT" shall mean and include the agreement, the work order, the accepted appendices of rates, Schedules of Quantities, if any, General Terms and Conditions of Contract, Special Conditions of Contract, Instructions to Tenderer, the drawings, the Technical Specifications, the Special Specifications, if any, the tender documents and the Letter of Intent\Accepting Letter issued by BHEL. Any conditions or terms stipulated by the tenderer in the tender documents or subsequent letters shall not form part of the Contract unless specifically accepted in writing by BHEL in the Letter of Intent and incorporated in the Agreement.
- B.1.8 "GENERAL CONDITIONS OR CONTRACT" shall mean the "Instructions and Information for Tenderer and General Terms and Conditions" pertaining to the work detailed.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- B.1.9 "TENDER SPECIFICATIONS" shall mean the Special Conditions, Technical Specifications, Appendices, Site Information and drawings pertaining to the work for which the tenderer are required to submit their offer. Individual Specification Numbers will be assigned to each technical specifications.
- B.1.10 "TENDER DOCUMENTS" shall mean the General Terms and Conditions and Tender Specifications.
- B.1.11 "LETTER OF INTENT" shall mean the intimation by a letter/telegram/telex/ fax to the tenderer that the tender has been accepted in accordance with provisions contained in the letter. The responsibility of the contractor commences from the date of issue of this letter and all the terms and conditions of contract are applicable from this date.
- B.1.12 "COMPLETION TIME" shall mean the period by date specified in the Letter of Intent/Work Order or date mutually agreed upon for handing over of the erected equipment/plant which are found acceptable by the Engineer being of required standard and conforming to the specifications of the contract.
- B.1.13 "ZERO DATE" shall mean the planned commencement date of work under this tender and shall be date of issue of Letter of Intent.
- B.1.14 "PLANT OR PROJECT OR SWITCHYARD" shall mean and connote the entire assembly of the plant and equipments covered by the contract.
- B.1.15 "EQUIPMENT" shall mean all equipments, machineries, materials, structural, electrical and other components of the plant covered by the contract.
- B.1.16 "TESTS" shall mean and include such test or tests to be carried out by the contractor as are prescribed in the contract or considered necessary by BHEL, in order to ascertain the quality, workmanship, performance and efficiency of the contracted work or part thereof.
- B.1.17 "APPROVED" "DIRECTED" or "INSTRUCTED" shall mean approved, directed or instructed by BHEL.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- B.1.18 "WORK OR CONTRACT WORK" shall mean and include supply of all categories of labour, specified consumables, tools and tackles required for complete and satisfactory site transportation, handling, stacking, storing, civil and electrical works, erection, testing & commissioning of the equipment to the entire satisfaction of BHEL.
- B.1.19 "SINGULAR AND PLURAL" etc. words carrying singular number shall also include plural and vice versa, where the context so requires. Words imparting masculine gender shall be taken to include the feminine gender and words imparting persons shall include any Company or Association or Body or Individuals, whether incorporated or not.
- B.1.20 "HEADINGS" The headings in these General Conditions are solely for the purpose of facilitating reference and shall not be deemed to be part thereof or be taken into consideration in the interpretation of construction thereof or the contract.
- B.1.21 "MONTH" shall mean calendar month.
- B.1.22 "WRITING" shall include any manuscript typewritten or printed statement under the signature or seal as the case may be.

B.2.0 LAW GOVERNING THE CONTRACT & COURT JURISDICTION:

The Contract shall be governed by the Law for the time being enforce in the Republic of India. The Civil Court at New Delhi having ordinary Original Civil Jurisdiction shall alone have exclusive jurisdiction in regard to all claims in respect of this contract.

B.3.0 ISSUE OF NOTICE:

The contractor shall furnish to the Engineer, the name, designation and address of his authorised agent and all complaints, notices, communications and references shall be deemed to have been duly given to the Contractor, if delivered to the Contractor or his authorised agent and shall be deemed to have been so given in the case of posting on the day on which they would have reached such address in the ordinary course of post or at which they were so delivered or left.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

B.4.0 USE OF LAND:

No land belonging to BHEL or its customer under temporary possessions of BHEL shall be occupied by the contractor without the written permission of BHEL.

B.5.0 COMMENCEMENT OF WORK:

B.5.1 The contractor shall commence the work within fifteen days of Letter of Intent or the time indicated in the Letter of Intent/Work Order and shall proceed with the same with due expedition without delay.

The Contractor shall have to give programme of work in Annexure 'M' to the ENGINEER-IN-CHARGE after mobilisation at site. This will have to be regularly updated / revised so as to meet the Project completion schedule as per requirement of BHEL /Owner.

B.5.2 If the successful tenderer fails to commence the work within the stipulated time, BHEL, at its sole discretion will have the right to cancel the Letter of Intent/Contract. His Earnest Money and/or Security Deposit will stand forfeited without any further reference to him without prejudice to any and all of BHEL's other rights and remedies in this regard.

B.5.3 All the works shall be carried out under the direction and to the satisfaction of BHEL/Customer/Owner.

B.5.4 The transported equipment, erected/constructed plant or work performed under the contract, as the case may be, shall be taken over when it has been completed in all respect and/or satisfactorily put into operation at site.

B.6.0 MEASUREMENT OF WORK AND MODE OF PAYMENT:

B.6.1 All payments due to the contractor shall be made only by "Account Payee Cheques".

B.6.2 For progress/running bill payments, the contractor shall present detailed measurement sheets in duplicate duly indicating all relevant details based on technical documents, protocols & material test reports and connected drawings for the work done during the calendar month/period under different categories in line with terms of payment as per Letter of Intent. The basis of arriving at the quantities/ weights shall be the relevant documents and drawings released by BHEL.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

These measurement sheets shall be prepared jointly with Engineer and signed by both parties. Where required, joint measurement with Customer/Owner shall have to be taken.

- B.6.3 The measurement sheets will be checked by the Engineer and quantities and percentage eligible for payment under different groups shall be decided by him. The abstract of quantities and percentage so arrived at based on the terms of payment shall be entered in the Measurement Book & signed by both the parties. Where required counter signature of Customer/Owner shall have to be taken.
- B.6.4 Based on the above quantities, contractor shall prepare the bills in the prescribed proforma and work out the financial value. These will be entered in the Measurement Book and signed by both the parties. Payment shall be made by BHEL after effecting the recoveries due from the Contractor.
- B.6.5 All recoveries due from the contractor for the month/period shall be effected in full from corresponding running bills unless specific approval from Competent Authority is obtained to the contrary.
- B.6.6 Measurement shall be taken jointly by person duly authorised by BHEL and the Contractor.
- B.6.7 The Contractor shall bear the expenditure involved, if any, in taking the measurements and testing of materials to be used in the works. The Contractor shall without extra cost to BHEL, provide all the assistance with appliances and other things necessary for measurement.
- B.6.8 If at any time due to any reason whatsoever, it becomes necessary to remeasure the work done, in full or in part, the expenses towards such re-measurement shall be borne by contractor.
- B.6.9 Passing of bills covered by such measurement does not amount to acceptance by BHEL of the completion of the work measured. Any left out work has to be completed by the Contractor, as directed by BHEL.
- B.6.10 Final measurement bill shall be prepared in the proforma prescribed for the purpose, based on the certificate issued by the Engineer that the entire work as stipulated in the tender specification has been completed in all respects to the entire satisfaction of BHEL.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

The contractor shall give unqualified "No claim" and "No Demand" certificates. All the tools and tackles loaned to him should be returned in condition satisfactory to BHEL. The abstract of final quantities and financial values shall also be entered in the Measurement Book and signed by both the parties. The final bill shall be paid after completion of all the defects/deficiencies etc. pointed out by BHEL. The contractor should submit all the original documents such as material consumption, site order book etc. maintained at site. After payment of final bill only guarantee obligation, percentage value shall remain unpaid which shall be released in accordance with Clause A.15.0.

B.7.0 RIGHTS OF BHEL:

B.7.1 Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
 attached with the tender document

B.7.2

B.7.3

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

B.7.4

B.7.5

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

B.7.6

B.7.7

B.7.8

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

B.7.9

Please Refer "ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS"
attached with the tender document

B.7.10

B.7.11

B.8.0 RESPONSIBILITY OF THE CONTRACTOR IN RESPECT OF LOCAL LAWS, EMPLOYMENT OF WORKERS ETC:

The following are the responsibilities of the Contractor in respect of observance of local laws, employment of personnel, payment of taxes etc.

- B.8.1 As far as possible, unskilled workers shall be engaged from the local areas in which the work is being executed. In case of any necessity is felt by the contractor to bring labourers from out side State, provisions of law governing such immigration by the concerned State are to be followed.
- B.8.2 The Contractor at all times during the currency of this contract, shall in all his dealings with the local labour for the time being employed on or in connection with the work, have due regard to all local festivals, religious and other customs.
- B.8.3 The contractor shall comply with all State and Central Laws, Statutory Rules, Regulations etc., such as : The payment of wages to, The Minimum Wages Act, The Workmen Compensation Act, The Employees Liability Act, The Industrial Dispute Act, The Employees Provident Fund and Miscellaneous Provisions Act 1952, Employees State Insurance Scheme, The Contract Labour (Regulations & Abolition) Act 1970 and other Acts, Rules and Regulations for labour as may be enacted by the Government during the tenure of the contract and having in force or jurisdiction at site. The Contractor shall give to the local Governing Body, Police and other concerned Authorities all such notice as may be required under law.

The contractor should have Provident Fund Code Number and shall ensure compliance of the EPF & MP Act, 1952 by the sub-contractors, if any engaged by the contractor for the said work,

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- B.8.4 The contractor, as required, will obtain independent license under the Contract Labour (Regulations and Abolition) Act 1970 from the concerned authorities based on the certificate (Form-V) issued by the Principal Employer/Customer.
- B.8.5 The Contractor shall pay all taxes, fees, license charges, deposits, duties, tolls, royalty, commissions or other charges which may be Leviable on account of any of his operations connected with this contract. The Contractor is responsible to furnish documentary evidence towards GST Registration of the State wherein the site is located and any other documents as per GST Act which may be required from time to time by BHEL. The contractor should have to get the contract registered immediately after award of works as per rules and regulations of the State Government. The contractor will file regular return as per statute of the State/ Centre and provide all information to BHEL as required for the assessment of the project concerned. In case BHEL is forced to make any of such payments, BHEL shall recover the same from the contractor either from moneys due to him or otherwise as deemed fit.
- B.8.6 Arrangements for the periodical visits of inspection agencies such as Electrical Inspector etc. to site, inspection certificates etc. will have to be made by the contractor at his cost. The contractor will also meet all expenses in connection with his welder's qualification/ re-qualification tests etc.
- B.8.7 The contractor shall be responsible for provision of health and sanitary arrangements {more particularly described in the Contract Labour (Regulation & Abolition) Act 1970} and safety precautions as may be required for safe and satisfactory execution of the contract.
- B.8.8 The Contractor shall be responsible for proper accommodation including adequate medical facilities for the personnel employed by him.
- B.8.9 The Contractor shall be responsible for the proper behaviour and observance of all regulations by the staff employed by him.
- B.8.10 The contractor shall ensure that no damage is caused to any person/property of other parties working at site. If any such damage is caused, it shall be the responsibility of the contractor to make good the losses or compensate them.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- B.8.11 All the properties/equipment/components of BHEL/its customer loaned with or without deposit, to the contractor, shall remain the properties of BHEL/its customer. The contractor shall use such properties for the purpose of execution of this contract. All such properties/equipment/components shall be taken to in good condition unless notified to the contrary by the contractor within 48 Hrs. The Contractor shall return them in good conditions as and when required by BHEL/its customer. In case of non-return, loss, damage repairs etc., the cost thereof, as may be fixed by the Engineer, will be recovered from the contractor.
- B.8.12 It shall not be obligatory on the part of BHEL to supply any tools and tackles or materials other than those specifically agreed to be given by BHEL. However, depending upon availability/possibility, BHEL/its customer's equipment and other materials may be made available to the contractor on payment of the hire charges as fixed by them, subject to the conditions laid down by BHEL/its Customer from time to time. Unless paid in advance, such hire and other charges shall be recovered from out of dues to the contractor or Security Deposit in one instalment.
- B.8.13 The Contractor shall fully indemnify and keep indemnified BHEL/its customer against all claims of whatsoever nature arising during the course of execution of this contract.
- B.8.14 In case the contractor is required to undertake any work outside the scope of this contract, the amount payable shall be as may be mutually agreed upon.
- B.8.15 Any delay in completion of works or non-achievement of periodical targets, due to reasons attributable to the contractor, will have to be compensated by the contractor either by increased manpower and resources or by working extra hours or more than one shift at no extra cost to BHEL.
- B.8.16 The contractor shall execute the work under the conditions usual to such construction work and in conjunction with numerous other operations at site and proceed in a manner that shall help in the progress of work at site as a whole.
- B.8.17 The contractor will be directly responsible for payment of wages to his workmen. A pay roll sheet giving details of all payments made to the workmen duly signed by the contractor's representative should be furnished to BHEL, along with each Running Account Bill. Also, Contractor shall display wages paid by him as per The Minimum Wages Act.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- B.8.18 In case of any class of work for which there is no specification laid down in the contract, such work shall be carried out in accordance with the instructions and requirements of the Engineer.
- B.8.19 No levy, payment or charges made or imposed shall be impeached by reason of any clerical error or by reason of any mistake in the amount levied, demanded or charged.
- B.8.20 No idle labour charges will be admissible in the event of any stoppage of work resulting in the contractor's workmen being rendered idle due to any reason any time.
- B.8.21 The contractor shall take all reasonable care to protect the materials and the work till such time the place/equipment has been taken over by BHEL/its customer.
- B.8.22 The contractor shall not stop work or abandon the site for whatsoever reason or dispute, excepting for force majeure conditions. All problems/disputes shall be separately discussed and settled without effecting the progress of work. Stoppage or abandonment of work, other than under force majeure conditions, shall be treated as breach of work of contract and dealt with accordingly.
- B.8.23 The contractor shall keep the area of work clean and shall remove debris etc. while executing day-to-day work. Upon completion of work, the contractor shall remove from the vicinity of works, all scrap, packing materials, rubbish, unused and other materials and deposit them in places specified by the Engineer. The contractor will also demolish all the hutments, sheds, offices etc. constructed and used by him and shall clean the debris. In the event of his failure to do so, the same will be arranged to be done by the Engineer and the expenses recovered from the contractor.
- B.8.24 The contractor shall execute the work in the most substantial and workman like manner in the stipulated time. Accuracy of work and timely execution shall be the essence of this contract. The contractor shall be responsible to ensure that the quality, assembly and workmanship conform to the dimensions and clearance given in the drawings and/or as per instructions of the Engineers.
- B.8.25 The contractor shall furnish progress reports on work at regular intervals as required by the Engineer.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

B.9.0 RESPONSIBILITIES OF CONTRACTOR IN RESPECT OF SAFETY OF MEN, EQUIPMENT, MATERIAL & ENVIRONMENT:

- B.9.1 All safety rules and codes applied by BHEL/its customer at site shall be observed by the contractor and his workmen without exception. The contractor shall be responsible for the safety of the equipment/materials and work to be performed by him and shall maintain all lights, fencing guards, signs etc. or other protections necessary for the purpose. Contractor shall also take such additional precautions as may be indicated from time to time by the Engineer, with a view to prevent pilferage, accidents, fire hazards etc. and suitable number of clerical staff, watch and ward, store keepers to take care of equipment, materials and construction tools and tackles shall be posted at site by the contractor till the completion of the work under this contract. The contractor shall arrange for such safety devices as are necessary for this type of work and carry out the requisite site tests of handling equipment, lifting tools, tackles etc. as per usual standards and practices.
- B.9.2 The contractor shall provide to its work force and ensure the use of required personal protective equipment as found necessary & as directed by the authorised BHEL officials in line with latest Amendments / Revisions of various Indian Standards.
- i) Safety helmets conforming to IS-2925 : 1984.
 - ii) Safety belts conforming to IS-3521 : 1983.
 - iii) Safety shoes conforming to IS-1989 : 1978.
 - iv) Eye and face protection devices conforming to IS-8520 : 1977 and IS-8940 : 1978.
 - v) Hand and body protection devices conforming to IS-2573 : 1975, IS-6994 : 1973, IS-8807 : 1978 and IS-8519 : 1977.
- B.9.3 All tools, tackles, fitting appliances, material handling equipment, scaffolds, cradles, safety nets, ladders, equipment, etc. used by the contractor (as per Annexure 'N') shall be of safe design and construction and maintained in good condition. However BHEL officials shall have the right to ban use of any of them or get them tested at their discretion.

All test & measuring instruments to be pre-calibrated through certifying agency before use. Also, please see. Cl. E.4.2 & E.6.3 of section - E for more details.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

All electrical equipment, connections and wiring for construction power, its distribution and use shall conform to the relevant requirements of Indian Electricity Act and Rules. Only electricians licensed by the appropriate statutory authority shall be employed by the contractor to carry out electrical works.

- B.9.4 All electrical appliances including portable electric tools used by contractor shall have safe plugging system to source of power and be appropriately earthed.
- B.9.5 The contractor shall not use any hand lamp energised by electric power with supply voltage of more than 240 volts. For work in confined spaces, lighting shall be arranged with power source of not more than 240 volts.
- B.9.6 Where it becomes necessary to provide and/or store petroleum products, explosives, chemicals and liquid or gaseous fuel or any other substance that may cause fire or explosion, the contractor shall be responsible for carrying out such provision and/or storage in accordance with the rules and regulations laid down in the relevant Government Acts, such as Petroleum Act, Explosive Act, Petroleum and Carbides of Calcium Manual of the Chief Controller of Explosives, Government of India etc. Prior approval of the authorised BHEL official at the site shall also be taken by the contractor in all such matters.
- B.9.7 The contractor shall arrange at his cost appropriate illumination as required at all work spots for safe working, when natural day light may not be adequate for clear visibility.
- B.9.8 In case of a fatal or disabling injury/accident to any person at construction sites pertaining to this work, the victim and/or his/her dependents shall be compensated by the contractor as per statutory requirements. However, if considered necessary, BHEL shall have the right to impose appropriate financial penalty on the contractor & recover the same from payments due to the contractor for suitably compensating the victim and/or his/her dependents. Before imposing any such penalty, appropriate enquiry shall be held by BHEL giving opportunity to the contractor to present his case.
- B.9.9 In case of any damage to property due to lapse by the contractor, BHEL shall have the right to recover the cost of such damages from the payments due to the contractor.
- B.9.10 In case of any delay in the completion of a job due to mishaps attributable to lapses by the contractor, BHEL shall have the right to recover cost of such delay

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

from the payments due to the contractor, after notifying the contractor suitably and giving him opportunity to present his case.

- B.9.11 If contractor fails to improve the standards of safety in its operation to the satisfaction of BHEL after being given reasonable opportunity to do so and/or if the contractor fails to take appropriate safety precautions or to provide necessary safety devices and equipment or to carry out instructions regarding safety issued by the authorised BHEL official, BHEL shall have the right to take the corrective steps at the risk and cost of the contractor after giving appropriate notice indicating the steps that would be taken by BHEL.
- B.9.12 The contractor shall submit report of all accidents, fires, property damaged & dangerous occurrences connected with his area of work or caused due to his action/ inaction, to the authorised BHEL official immediately after such occurrence, but in any case not later than 12 hours of the occurrence.
- B.9.13 During the course of construction, alteration or repairs scrap lumbars with protruding nails, sharp edges etc. and all other debris including combustibles scrap shall be kept cleared from working areas, passage ways and stairs in and around site.
- B.9.14 Cylinders shall be moved by tilting and rolling them on their bottom edges. They shall not be intentionally/ negligently dropped, struck or permitted to strike each other violently. When cylinders are transported by powered vehicles, they shall be secured in a vertical position.
- B.9.15 The contractor shall be responsible for the safe storage of his radioactive sources if same have been permitted to use.
- B.9.16 All contractor's supervisory personnel and sufficient number of workmen shall be trained for fire fighting and first aid duties and shall be assigned specific duties. Enough number of such trained personnel must be available during the tenure of the contract.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

- B.9.17 Contractor shall provide enough fire protecting equipment of the types & numbers at his office, stores, construction/erection site, other temporary structures, labour colony area etc. Access to such fire protection equipment shall be easy and kept open at all times. Compliance of the above requirement under fire protection system at project site shall in no way relieve the contractor of any of his responsibilities & liabilities to fire accident occurring. In the event of fire safety measures being not to BHEL's satisfaction, BHEL shall have option to provide the same and recover the cost plus incidentals from contractor's bills and/or impose penalty as deemed fit by the Engineer.
- B.9.18 Before commencing the work, the contractor shall appoint/nominate a responsible officer to supervise implementation of all safety measures and liaison with BHEL Engineer at site.
- B.9.19 If safety record of the contractor in execution of the awarded job is to the satisfaction of Safety Department of BHEL, issue of an appropriate certificate to recognise the safety performance of the contractor may be considered by BHEL after completion of the job.
- B.10.0 **CONSEQUENCES OF CANCELLATION:**
- B.10.1 Whenever BHEL exercises its authority to terminate the contract/withdraw a portion of work, the work may be got completed by any other means at the contractor's risk and cost provided that in the event of the cost of completion (as certified by the Engineer which shall be final and binding on the contractor) being less than the contract value, the advantage shall accrue to BHEL. If the cost of completion exceeds the money due to the Contractor under the Contract, the Contractor shall either pay the excess amount demanded by BHEL or the same shall be recovered from the contractor. This will be in addition to the forfeiture of Security Deposit and recovery of liquidated damages as per relevant clauses.
- B.10.2 In case BHEL completes the work under the provisions of this clause, the cost of such completion to be taken into account for determining the excess cost to be charged to the contractor shall consist of cost of materials purchased and/or labour provided by BHEL with an addition of such percentage to cover supervision and establishment charges as may be decided by BHEL.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

B.11.0 INSURANCE:

- B.11.1 BHEL/its customer shall arrange for insuring the project materials/properties of BHEL/its customer covering the risks during transit, storage, construction, erection and commissioning.
- B.11.2 It shall be the sole responsibility of the Contractor to insure his workmen against risks of accident and injury while at work as required by the relevant rules and to pay compensation, if any, to them as per Workmen's Compensation Act. The Contractor shall also insure his staff against accidents. The work will be carried out in a protected area and all the rules and regulations of BHEL/its client in the project area which are in force from time to time will have to be followed by the contractor.
- B.11.3 If due to negligence and/or non-observance of safety and other precautions any accident/injury occurs to any other person/public, the contractor shall pay necessary compensation and other expenses, if so decided by the appropriate authority.
- B.11.4 It shall be the responsibility of the contractor to provide security and insurance claim related information/reports, FIRs etc. for the equipment/material belonging to BHEL/its customer and handed over to the contractor for transportation/erection/ construction till these are taken over by BHEL after erection/construction or are returned to BHEL/its customer's store.
- B.11.5 If due to Contractor's carelessness, negligence, non-observance of safety precautions, improper security arrangements or due to non-compliance of paper work needed for lodging insurance claim, damage to BHEL/its Customer's property and/or personnel should occur, and if BHEL is unable to recover its claim from the Insurance Company, the deficit will be recovered from the Contractor. **All losses arising out of theft of material from the contractor's store/erection site shall be recovered from the contractor irrespective of the insurance claims.**

B.12.0 STRIKES & LOCKOUTS:

- B.12.1 The Contractor will be solely responsible for all disputes & other issues connected with his workmen. In the event of the contractor's workmen resorting to strike or the contractor resorting to lockout and if the strike or the lockout so declared is not settled within a period of one month, BHEL shall have the right to get the work executed by employing its own men or through other agencies or both. The cost incurred by BHEL in this regard shall be recovered from the Contractor.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

B.12.2 For any purpose whatsoever, the employees of the contractor shall not be deemed to be in the employment of BHEL/its Customer.

B.13.0 FORCE MAJEURE:

B.13.1 The following shall amount to force majeure conditions:-

Acts of God, Act of any Government, war, Sabotage, riots, civil Commotion, Police Action, Revolution, Flood, Fire Cyclone, Earthquake, Epidemic and other similar causes over which the contractor has no control.

B.13.2 If the contractor suffers delay in the due execution of the contract, due to delays caused by force majeure conditions, as defined above, the agreed time of completion of the work covered by this contract may be extended by a reasonable period of time in consultation and after agreement of BHEL's clients / owner, provided that on the occurrence of any such contingency, the Contractor immediately reports to BHEL in writing the causes of delay. The Contractor shall not be eligible for any compensation on this account.

B.14.0 GUARANTEE:

B.14.1 Even though the work will be carried under the supervision of BHEL Engineers, the contractor will be responsible for the quality of the workmanship and shall guarantee the work done for a period of 12 months from the date of putting the complete system into commercial operation or 18 months from the date of system is declared completely erected duly tested and accepted by customer whichever is later and shall rectify free of cost all defects due to faulty erection detected during the guarantee period starting from the date of the completion of rectification. In the event of the contractor failing to repair the defective works within the time specified by the Engineer, BHEL may proceed to undertake the repairs of such defective works at the contractor's risk and expense without prejudice to any other rights and recover the same from Security Deposit/other dues.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

B.15.0 ARBITRATION:

B.15.1

Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02**

Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

NOTE:

Above clause No. B.15.0 stands deleted. Please refer Annexure to conditions of contract for ETC works.

B.16.0 VARIATIONS AND VALUATIONS:

B.16.1 QUANTITIES:

The quantities set out in the Bill of Quantities are the estimated quantities of the work but they are not to be taken as the actual and correct quantities of the works to be executed by the Contractor in fulfilment of his obligations under the Contract.

B.16.2 VARIATIONS:

B.16.2.1 The Engineer shall have power to make any variation of the form, quantity of the Works or any part thereof that may in his opinion be necessary and for that purpose or if for any other reason it shall in his opinion be desirable shall have power to order the Contractor to do and Contractor shall do any of the following:-

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- a) Increase or decrease the quantity of any work included in the contract.
- b) Omit any such work.
- c) Change the character or quality or kind of any such work.
- d) Execute additional work of any kind necessary for the completion of the works and no such variation shall in any way vitiate or invalidate the contract but the value (if any) of all such variation shall be taken into account in ascertaining the amount of the Contract Price.
- e) Restrict the extent of work of any item covered under Clause E.10.0 of Section - E "Schedule of Equipment".

B.16.2.2 Orders for Variations to be in writing. No such variation shall be made by the contractor without an order in writing of the Engineer provided that, no order in writing shall be required for increase or decrease in the quantity of any work where such increase or decrease is not the result of an order given under this clause but is the result of the quantities exceed in for being less than those stated in the Bill of Quantities. Provided also that if for any reason the Engineer shall consider it desirable to give any such order verbally the Contractor shall comply with such order and any confirmation in writing of such verbal order given by the Engineer whether before or after the carrying out of the order shall be deemed to be an order in writing within the meaning of this clause. Provided further that if the contractor shall confirm in writing to the Engineer any verbal order of the Engineer and such confirmation shall not be contradicted in writing by the Engineer, it shall be deemed to be an order in writing by the Engineer.

B.16.3 VALUATION OF VARIATIONS:

The Engineer shall determine the amount (if any) which in his opinion should be added to or deducted from the sum named in the Contract in respect of any extra or additional work done or work omitted by his order. All such work shall be valued at the rates set out in the Contract if in the opinion of the Engineer the same shall be applicable. If the contract shall not contain any rates applicable to the extra or additional work then suitable prices shall be derived from the nearest item of BOQ or arrived at from the actual cost of manpower utilised (the cost of T&P and testing equipment etc. are not to be taken into account for arriving at the rates of additional/extra works) plus 10% for contractor's OH and profit. The rates for manpower shall be as per the minimum wages applicable for the project area.

Above clause No.B.16.3 shall be read in conjunction with clause No.1.of of Annexure to conditions of contract for ETC works.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

B.16.4 POWER OF ENGINEER TO FIX RATES:

If the nature or amount of any omission or addition relative to the nature or amount of the whole of the contract work or to any part thereof shall be such that in the opinion of the Engineer the rate or price contained in the Contract for any item of the Work is by reason of such omission or addition rendered unreasonable or inapplicable then a suitable rate or price shall be agreed upon between the Engineer and the Contractor. In the event of disagreement the Engineer shall fix such other rate of price as shall in his opinion be reasonable and proper having regard to the circumstances and the same shall be binding on the contractor. But under no circumstance the contractor shall suspend the work on the plea of non-settlement of rates falling under the clause or claim any compensation on that account.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - M

PROGRAMME OF WORK

SL.NO.	ACTIVITY	DURAION
01.	Award of work.	Zero week
02.	Mobilisation & setting up of site office weeks
03.	Start / finish of structure erection weeks
04.	Start / finish of stringing of shielding wire and conductors weeks
05.	Start / finish of Circuit Breaker erection weeks
06.	Start / finish of other equipment erection weeks
07.	Start / finish of testing and precommissioning weeks
08.	Start / finish of commissioning weeks
09.	Final Handing over weeks

(SIGNATURE OF TENDERER)
WITH STAMP

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - N

LIST OF TEST EQUIPMENTS TO BE ARRANGED BY ETC CONTRACTOR

All measuring and testing instrument shall be pre-calibrated through a certifying agency before use. The certificate of calibration shall be submitted to BHEL Site Engineer for records. Also see clause E.4.2 & E.6.3 under Section E of the tender specification for more details.

<u>A -</u>	<u>General purpose</u>	<u>Qty.</u>
1.	Digital multimeter - 4½ digits Accuracy $\pm 1\%$ (Any reputed make - preferably Fluke - make)	4 Nos.
2.	Megger 2.5 kV - 5kV, range 0.5 MΩ - 10,000 MΩ (Motorised/Electronic) (Any reputed make)	1 No.
3.	Megger having voltage multiplier 0-500V- 1000V, (Motorised / Electronic) Range 0.5 MΩ - 1000 MΩ (Any reputed make)	1 No.
4.	Single phase variac 8 A, 0.-250V, 50 HZ	2 No
5.	Three phase variac 15A, 0-440V, 50 HZ	1 No
6.	Single phase transformer 220V / 4000V, 500VA, 50HZ	1No
7.	Stop watch	1No
8.	Micro- ohm- meter (mV drop test kit) 0-200ADC, 0-2000 micro ohm with suitable calibrated cable leads for current injection and mV drop.	1 No
9.	Phase sequence meter	1 No
10.	Two way intercom set with 50 to 100 M cables for checking of cable continuity	2 sets
11.	Walkie - Talkie sets with battery charging sets Receiver + Transmitter, Type GP 300 - Motorola - make	1 set
12.	Variable D.C. power supply 0-220VDC, 10 A	2 Nos
13.	4 pole Miniature moulded case breaker 16 A	3 No
14.	Capacitance meter having range 20 PF- 100mfd $\pm 1\%$	1 No
15.	Isolation Transformer 1KVA, 240V AC, 1 phase, 50Hz	2 Nos

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

<u>B</u>		
<u>For testing of current transformer</u>		
1.	Primary injection test kit, range 0-2000A with a pair of leads & C clamps for testing of CT's	1 No
2.	Secondary injection test kit suitable for 5A& 1A with banana plug cable leads.	1 No
3.	Digital Tongue tester 0-2000A, 600VAC, 50 Hz (Any reputed make).	1 No
4.	Digital Tongue tester 0-20A, 600V AC, 50 Hz (Any reputed make).	1 No
5.	Digital Tongue Tester, 0-1A, 600V AC, 50Hz	2 Nos.
<u>C -</u>		
<u>For testing of oil cooled transformer and AC reactor</u>		
1.	Transformer winding resistance meter or Kelvin's double bridge	1 No
2.	Transformer turns ratio meter	1 No
3.	PPM tester for transformer oil	1 No
4.	BDV tester for transformer oil	1 No
<u>D</u>		
<u>For testing of relays</u>		
	Single phase / 3 phase relay test kit having timer current source 5A, 1A, voltage source 0-220VDC, 0-110 VAC 50 HZ. (Any reputed make)	1set
<u>E-</u>		
<u>For time measurement of breaker</u>		
	Breaker closing and / opening time measurement timer	1 No
<u>F</u>		
<u>For testing of relays and distance protection</u>		
1.	CFB kit or equivalent - of any reputed make	1 Set
2.	ZFB kit or equivalent - of any reputed make	

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

G For testing of transformer bushings CT, CVT & Circuit Breaker used in HV System

Capacitance and tan Delta kit suitable for 12KV (Any reputed make)	1 Set
---	-------

H. Safety / protective means

- Protective earth rod suitable for 220KV / 400 KV system having leakage current meter, 70MM² copper cables and C clamps (Any reputed make). 2 Nos
- Helmets and hand globes etc.

I. For PLCC Equipment:

- b) Digital time interval meter and frequency counter, 8 digits with frequency range 10 Hz to 10MHz.
- c) 200Hz to 620KHz Selective level meter.
- d) 200Hz to 620KHz Selective level generator.

Note:

1. Above is only a specimen/indicative list and any other test equipment (s) as may be required by Owner / BHEL at site during the execution of work will be arranged by the contractor well in time.
2. The status of tools, plants and instruments mentioned in annexure C of section - A does not relieve the subcontractor of his responsibility to make available all the test equipments and tools & tackles mentioned in annexure N of section B as per requirement of project.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - P

ACTIVITIES FOR TESTING AND COMMISSIONING BY ETC CONTRACTOR

1. Preparation of joint inspection records / observation by BHEL, BHEL customer and the contractor on the pending activities of erection holding for starting of testing and commissioning.
2. Issue of certificate for completion of erection activities to the satisfaction of BHEL customer.
3. Compilation of documents (scheme, cable schedules, FQP, technical literature, operation and maintenance manuals, technical reports, works test certificate for the equipments / components, and other relevant documents to expedite commissioning) in a systematic manner to present to customer/owner to meet the contractual requirement.
4. To expedite the testing activities contractor has to arrange the engineers and his staff and instruments at site for testing and commissioning of switchyard equipments as follows:
 - 4.1 Testing of individual relay, energy meter, transducer and meters for their satisfactory operation.
 - 4.2 Protection devices / relays will be tested with appropriate current and voltage injections.
 - 4.3 Individual control and protection panels testing for their satisfactory operation as per scheme.
 - 4.4 Individual CT, PT, CVT, Breaker, Transformer and Isolator LA, MB, Battery Charger etc. where ever possible to test them independently.
 - 4.5 Wiring check as per scheme and cable schedule preferably in the following sequences:
 - Between marshalling Kiosk in the yard to other yard equipments.
 - Between equipments in the yard.
 - Yard equipments to control room equipments.
 - Inter connection between control room equipments.
5. All cables to be properly glanded, identified and terminated suitably.
6. Cables should have proper / accurate cross reference ferruling and necessary cable tags for identifications as per recommendation by BHEL/ Customer.
7. Green marking in cable schedule and scheme after wiring check. Contractor to make also “As Built” scheme and cable schedule for submission to BHEL/Customer.
8. List of wiring mistakes, component damage and mal-operation of components.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

9. Successful completion of equipment level testing operative from local and remote and desired FQP filled up and approved by ultimate customer. Approval/acceptance on FQP results by customer has to be obtained by Contractor. For any technical clarifications, BHEL will only assist.
10. In case the contractor is finding difficulty to understand the technicalities to undertake testing and commissioning of a particular equipment, subsystem and system he has to inform BHEL in advance with in 2 months from the date of award of contract for necessary information and explanation.
11. For erection/commissioning of SF6 Circuit Breakers (If called for in BOQ), the services of experts +for supervision will be extended by BHEL free of cost. Contractor will provide adequate support by providing skilled manpower and tools & tackles. However the complete responsibility for erection and commissioning lies with subcontractor.
12. Contractor has to keep a senior and experienced person in the area of testing and commissioning associated with his skilled staff till charging and handing over of complete switchyard to the satisfaction of BHEL customer.
13. Contractor has to be well equipped at site with testing instruments and safety measures (like helmet and hand globes) while doing testing and commissioning.
14. Contractor will also carry out design validation tests as per BHEL / BHEL customer documents.
15. If the contractor fails to take up testing and commissioning work as per the requirement of contract or project requirement, then BHEL will be at liberty to hire services of third agency for this work at the risk and cost of subcontractor.
16. Testing of mandatory spares or any other spare (if required by customer / BHEL), cleaning and handing over to customer's stores is also included in the scope of this Tender Specification. The site Test Reports of these mandatory spares will also be generated by subcontractor in such a case.
17. In case contractor fails to arrange Test equipments as referred in Annexure 'N' (as per requirement of equipment covered in BOQ), BHEL will arrange the instruments at the risk and cost of contractor for providing such instruments.
18. Contractor has to repeat any tests free of cost, even if already conducted, whenever required to prove and check the healthiness of system before power flow, such tests could be primary injection and secondary injection in CT, CVT, meggering, and functional tests or any other tests as required by BHEL/customer.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

19. Oil processing/filtering in a transformer, CT and CVT shall also be repeated free of cost if required before charging and handing over of the switchyard to the owner in case BDV and PPM of oil is not satisfactory.
20. As isolator is a rotating equipment and its alignment is likely to get disturbed. Therefore contractor has to do alignment of isolators and measurement of contact resistance repeatedly free of cost as and when required till handing over of the station.
21. Commissioning means charging of total system in a sub-station and inter connected equipments by power flow. Accordingly the payment will be made to the contractor as per payment terms.
22. Contractor has to deploy adequate and experienced man power at site as per project requirement and advice of BHEL site in-charge. Non compliance of this requirement will be treated as indiscipline and non cooperation of the contractor. Accordingly BHEL will hire the man power as required at the risk and cost of the contractor after giving a single notice.
23. Based on site requirement, for the works not stipulated in the contract, the contractor has to provide assistance of skilled manpower with required tools and test instruments.
24. If any Expert services of manufacturer for commissioning supervision of special protection relays / numerical relays / equipment is felt necessary by the contractor, the same shall be arranged by the contractor themselves at their cost. Contractor shall provide testing & Commissioning, Engineer, electrician, other tools tackles and consumables for these equipments and for total system.

Any delay in arranging special testing & commissioning equipment and expert supervisor shall not entitle the contractor to any claim (idle labour, additional time etc.) whatsoever.
25. Any idle days of the expert supervisor at site due to reasons attributable to the contractor, due to lack of readiness in erection, delay in arranging of manpower, tools etc. shall be to contractor's account.

NOTES :-

- (1) Above is only an indicative list. Contractor has to mobilise and keep adequate competent commissioning staff at site to ensure that all mile stones & events and relevant commissioning activities are completed successfully in a scheduled time.
- (2) In case contractor is not finding competent and adequate staff with him, he can hire the commissioning services from out side agencies approved and accepted by BHEL. Contractor will furnish the details (experience, qualification) of all commissioning staff and the commissioning tools and instruments available with the contractor OR obtained on loan basis with in 60 days from the date of award of the work.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

ANNEXURE - Q

LIST OF TOOLS & TACKLES TO BE ARRANGED BY CONTRACTOR

<u>Sl. No.</u>	<u>PARTICULARS</u>
01.	Electrical Drilling Machine & Hand drilling Machine.
02.	Hydraulic Bending Machine for Al. pipes.
03.	Gas Welding Set & Gas Cutting Set.
04.	Hand Operated Winches.
05.	Electric Welding machine.
06.	Jack with axle for lifting Cable Drum.
07.	Jointers Tool Box.
08.	Blow Lamps.
09.	Compression Tools suitable for Cables.
10.	Pull Lifts.
11.	Pulley Blocks.
12.	Hooks/Chains
13.	Cable Rollers.
14.	Hydraulic Jacks
15.	Aluminium Rollers.
16.	D- Shackles.
17.	Dynamometers.
18.	TIG, Welding machine (for Aluminium welding).
19.	High Vacuum 1000 GPH Oil Filtration Machine for Transformer / Reactor oil suitable for 760mm vacuum. In case 250 MVA / 315 MVA transformer ETC work is covered in the scope, Oil filtration equipment of 1500 GPH suitable for High Vacuum along with 30 kL capacity storage tank for oil storage and processing of oil should be provided.
20.	Hydraulic cranes including accessories (20 tonne or more and boom height of 15mts. Vertical or more) suitable for erection of transformer bushings accessories and other equipments.
21.	Hydraulic Crimping tools for conductor / Shield wire.
22.	Crimping tools for cable termination.
23.	Torque wrenches of different ranges in sufficient numbers.
24.	All general purpose hand tools in sufficient quantities.
25.	Shearing Machine for cutting of Earthing Flat.



- For cable laying.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

26. Tool Kit for fitters.
27. Tool Kit for Electrician.
28. Bench Vice.
29. 'A' type collapsible Al. ladder height 8M.
30. 'H' type Al. ladder height 5M.
31. Pressure Gauge 0-1kg/Sq.cm for measurement of N₂ pressure.
32. Vacuum gauges for measuring fire vacuum of less than 1 torr in transformer.
33. Nylon slings for 4T capacity with different lengths.
34. Turper
35. Angle meter for measurement of bushing angle during erection.
36. Nylon hammer.
37. Wedge for cutting of 'O' rings/neoprene gaskets.
38. Die/Drill tool for making holes in gland plates (All sizes in sufficient numbers)
39. Phoenix screw drivers for handling of Terminal Blocks.

IMPORTANT NOTE:

1. The Contractor shall submit the copies of latest test certificate of lifting tackles, slings, pulleys etc. after mobilisation at site to the ENGINEER-IN-CHARGE.
2. Above is only a specimen/indicative list and any other Tools & Tackles as may be required by Owner/ BHEL at site during the execution of work will be arranged by the contractor promptly.
3. The status of tools, plants and instruments mentioned in annexure C of section - A does not relieve the subcontractor of his responsibility to make available all the test equipments and tools & tackles mentioned in the annexures of section B as per requirement of project.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION-C

SPECIAL CONDITIONS OF **CONTRACT**

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION - C

SPECIAL CONDITIONS OF THE CONTRACT

C.1.0 QUALIFICATION OF THE CONTRACTOR :

- C.1.1 The contractor must have the experience of execution of identical work in the past as specified in the tender documents and must have executed contracts of similar nature. The contractor must furnish enough evidence to establish his capacity in erection, testing and commissioning of similar equipments covered under this specification.
- C.1.2 The contractor should be able to obtain clearance from the Electrical Inspector/ State Authorities on completion of the installations. If required, the Contractor is supposed to obtain such clearances on part completion of the installation as required by BHEL / Owner time to time. Also, before the start of work the contractor should obtain the supervisory license from the concerned Electrical Authorities.
- C.1.3 The Contractor will have following certificates.
- a) Contractor electrical licence.
 - b) Supervisor competency certificates to deal with Electrical high voltage equipments for their installation and for their installation and testing.
- Such certificates from two persons of subcontractors representatives who will be posted at site will be required.
- C.1.4 The contractor should be aware of the local conditions and be well acquainted with the site.
- C.1.5 The contractor shall be preferred who has worked for State Electricity Boards/BHEL/Steel Authorities/Public Undertakings.
- C.1.6 The contractor should have a very good engineering background and capability of carrying out erection and commissioning work of large scale.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

~~C.2.0~~ **TERMS OF PAYMENT FOR ERECTION, TESTING AND COMMISSIONING :**

C.2.1

C.2.2

C.2.3

C.2.4

C.2.5

C.2.6

Please refer " Annexure to conditions of contract for ETC Work" attached with the tender documents.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

C.2.7

Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

C.2.8

Above clause No. C.2.0 stands deleted. Please refer Annexure to conditions of contract for ETC works.

C.3.0 **SECURITY DEPOSIT:**

C.3.1

C.3.2

Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

C.3.3

C.3.4

C.3.5 **RETURN OF SECURITY DEPOSIT:**

The contractor should refer the clause A.17.7.

No interest shall be payable by BHEL on Earnest Money/Security Deposit or on any money due to the contractor by BHEL.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

C.4.0 PERFORMANCE GUARANTEE:

- C.4.1 The contractor shall be responsible for any defects in the execution of work noticed in guarantee period of 12 months reckoned from the date of putting the complete system into commercial operation/handing over to customer or 18 months from the date of system is declared completely erected, duly tested and accepted by BHEL and customer. The Contractor shall submit a bank guarantee worth 10% of the total contract value of erection, testing and commissioning of equipment in the prescribed proforma form of BHEL. If the contract is for more than one sub-station and the substations are completed and taken over by customer in stages, then the performance BG for the substation completed and handed over may be submitted based on the contract value of individual substation at the time of submitting the final bill, substation wise.

C.5.0 LD/PENALTY FOR DELAY IN EXECUTION:

C.5.1

Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

Above clause No.C.5.0 stands deleted. Please refer Annexure to conditions of contract for ETC works.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

C.6.0 RECEIPT/ UNLOADING, HANDLING, TRANSPORTATION, SECURITY AND PRESERVATION OF EQUIPMENT AT SITE:

- C.6.1 The contractor shall take the delivery of all the equipment, structures and materials etc. at site and their security shall be the responsibility of the contractor. Further transportation of materials to work place as per requirements will be in the scope of the contractor. For any delay, demurrage/wharfage/detention charges will be borne by the contractor.

In order to ensure timely completion of project, some of the equipment/material as covered under clause no. E.10.0 of Section-E (Schedule of equipment) may arrive at site and are unloaded and stacked/stored prior to mobilisation of ETC Contractor for the work covered under this Tender Specification. In such a case, the amount actually spent by BHEL on unloading and storage till the time of mobilisation by the ETC contractor shall be debited to their account. Immediately after mobilisation, the contractor shall take these into their custody and all the conditions as applicable for the material directly received by the contractor will be applicable for these material.

C.7.0 FACILITIES TO BE PROVIDED AT SITE BY THE CONTRACTOR:

- C.7.1 Watch and ward by authorised/licensed agency for the safe custody of the equipment shall be responsibility of the contractor.
- C.7.2 It is the responsibility of the contractor to dismantle and take away all the materials of his office accommodation as soon as the project is handed over to BHEL/Owner and clean the area off debris.

C.8.0 TESTING AND COMMISSIONING:

- C.8.1 All the electrical/mechanical test of the materials and equipment will be arranged by the contractor as per standard Specification/Field Quality Plan/ Erection Manual/Directive of the Site Engineer and Owner. The contractor shall have to fill the check list (site inspection record forms) for receipt, storage, erection, testing and commissioning of all the equipments as per BHEL systems to ensure proper quality of work.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- C.8.2 All the testing equipment required to carry out the site test for all the equipment or the erected equipment shall be calibrated and shall be arranged by the contractor at his own cost. However, necessary instruction and the guidelines will be given by BHEL/owner.
- In case Contractor is unable to provide the calibrated measuring and test instruments to the satisfaction of 'ENGINEER' then as per his own wisdom/ judgement can recommend a deduction of maximum limit up to 5% from the Contractor's bill. But this in no way relieves the Contractor from arranging the test & measuring instruments / equipment as required for completion of the 'PROJECT' without affecting the quality of work and meeting any Contractual obligation whatsoever.
- C.8.3 The contractor shall be completely responsible for the satisfactory erection and providing Test Equipment and skilled manpower for testing, commissioning of all equipment, notwithstanding the fact that he may be assisted by BHEL or its authorised representative.
- C.8.4 The installation of all electrical equipment shall be carried out only by an electrical contractor holding a valid License for carrying out installation work of the voltage classes involved, under the direct supervision of and by persons holding valid certificates of competency for the same voltage classes, issued or recognised by the State Government. Contractor shall submit the particulars of the License held by him.
- C.8.5 The contractor shall furnish to BHEL the names and particulars of certificates of competency of the supervisors and workmen to be engaged for carrying out installation work against this specifications.
- C.8.6 The work shall be executed in a workman like manner in accordance with the requirements specified in the General Specification of Electrical Equipment installation, testing and commissioning specifications. Copy of such specifications/ drawings will be given to successful bidder before starting the work.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- C.8.7 All electrical work shall also comply with standard norms and practices adopted by the State Electricity Board. Site test reports shall be prepared and submitted by the contractor.
- C.8.8 Before charging the installation in part or full, this shall have to be approved by Statutory Govt. Authorities like Electrical Inspector, other concerned agency and the contractor has to arrange approval for the same as and when required by BHEL/Owner.
- C.8.9 Any feasible modification in the equipment or installation that may be demanded by Electrical Inspector shall have to be carried out by the contractor at no extra charges to BHEL. The contractor shall take all necessary steps to enable BHEL/Owner to get the installation approved by the above authorities & shall render all necessary assistance to BHEL/Owner in the matter.
- C.9.0 **COMPLETION OF CONTRACT:**
- C.9.1 All equipment, mountings, fittings accessories or apparatus which may not have been specifically mentioned but which are usual or necessary for completing the erection and commissioning work of system, shall be done by the contractor without any extra charges.
- C.10.0 **TRIAL OPERATION AND HANDING OVER:**
- C.10.1 On completion of erection of the equipment and before pre-commissioning tests of the equipment, each of the equipment shall be inspected by the BHEL/Owner for the correctness and completeness of the installation. Thereafter commissioning engineers shall carry out all pre-commissioning tests. The results of such pre-commissioning tests shall be signed jointly by the contractor's representative and BHEL/Owner.
- C.10.2 On conclusion of satisfactory pre-commissioning tests, the trial operation of the equipments shall start. The equipment shall be on trial operations during which period all necessary adjustments shall be made.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- C.10.3 After completion of trial operation, the plant will be handed over to the owner, after the period to be specified by BHEL. On taking over the plant, the owner shall issue a certificate to that effect.
- C.10.4 BHEL/Owner shall be at liberty from time to time or at any time before the completion of the works to take possession and use any part of the completed works and in such case the contractor shall completely finish the said uncompleted part or parts of the works as and when the engineer shall direct whether before or after the respective prescribed time or extended time (if any) for the completion of the works and if required by the engineer while the owner is in possession of the said part or parts, of the site or works.
- C.10.5 If due to reason of any default on the part of Contractor, a taking over certificate has not been issued in respect of any portion of the works, within one month after the time for completion or extended time as the case may be, the Owner/BHEL shall be at liberty to use the works or any portion thereof in respect of which a taking over certificate has not been issued, provided that the works or the portion so used as aforesaid shall be reasonably capable of being used and that the Contractor shall be afforded the earliest opportunity of taking such steps as may be necessary to permit the issue of the taking over certificate.

C.11.0 **ADDITIONAL EXPENDITURE:**

In case any additional expenditure is incurred in the works arising out of the faulty execution of the works by the contractor, such additional expenditure shall be borne by the contractor.

C.12.0 **SPLITTING THE WORK:**

BHEL reserves the right to split the work and award any part of the work to any agency without assigning any reason whatsoever.

C.13.0 **SUPPLY OF MATERIAL:**

- C.13.1 The Contractor shall in no case be entitled to any compensation or damage on account of any delay in supply or non-supply thereof for all or any such materials and stores but the contractor shall be entitled to suitable extension of time as may be determined by the Engineer whose decision shall be final and binding.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

- C.13.2 The contractor shall satisfy himself of the quantity and quality of the materials at the time of taking delivery from the BHEL/Owner. No claim whatsoever will be entertained by the BHEL/Owner on account of quality or quantity after the materials are taken by the contractor from the BHEL/Owner.

C.14.0 ELECTRICITY AND WATER:

- C.14.1 Electricity for construction work shall be provided at one point on chargeable basis at the rate prevailing at the time of drawal of power, unless specified otherwise. The contractor shall have to make their own arrangements, at their cost, for distribution to various locations for their works including proper switch/fuse units, distribution boards, cables, poles etc. to ensure safety of men and equipment. Where required the contractor shall employ diesel operative equipment in addition to electric operated ones to ensure timely completion of work.

In case BHEL is unable to provide Electricity on chargeable basis then the contractor has to arrange same at his end.

- C.14.2 The contractor shall indicate in his offer the power load required by him along with the load details for which power is required.
- C.14.3 The owner shall not be responsible for any inconvenience caused due to any failure of lighting and power supply and no compensation for delay in works can be claimed by the contractor due to such non-supply on the grounds of idle labour, machinery or any other grounds.
- C.14.4 The contractor should ensure that the work in critical areas is not held up in the event of lighting and power breakdown and for the same he should have some standby arrangement at his cost. In the event of breakdown in the electric supply, if the progress of work is hampered, it will be the responsibility of the contractor to step up the progress after restoration of electric supply so that over all progress of work is not affected. The contractor shall make proper arrangement of illumination at work place while working in late hours or in darkness.
- C.14.5 Unless stated otherwise in the scope of works, the contractor shall make his own adequate arrangement for procuring clear water to be used in the works.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

C.15.0 INSURANCE :

C.15.1 Contractor shall take insurance cover(s) to cover his Tools and Plants, Assets, workmen compensation and third party liability. The contractor shall make available the original insurance cover(s) to the Engineer for necessary verification before commencement of work.

C.16.0 ESCALATION/PRICE VARIATION :

C.16.1 Under this contract, **No escalation/ Price variation** is allowed. The quoted prices are FIRM till complete commissioning and handing over of the Project to Customer/Owner.

C.17.0 OVERRUN CHARGES:

C.17.1 **Above clause No.C-17.0 stands deleted. Please refer Annexure to conditions of contract for ETC works.**

C.18.0 CONSTRUCTION SCHEDULE:

C.18.1 While submitting the offer the contractor shall furnish Bar Chart detailing out all major activities, as to how he proposes to complete the work maintaining the completion schedule as given in Notice Inviting Tender. If the contractor fails to achieve any milestone indicated in the Bar Chart/completion schedule mentioned elsewhere, the contractor shall be levied penalty as per clause C.5.0.

C.19.0 HEAVY MATERIAL HANDLING EQUIPMENT:

The contractor must clearly indicate the details of all Heavy Materials Handling Equipment owned by him in Annexure-C of Section-A, General Instructions to the Tenderer. The boom length, capacity of handling load and other relevant details must also be given.

C.20.0 CALIBRATED TEST INSTRUMENTS:

Contractor is required to bring all the required testing equipments and instruments for conducting pre-commissioning test. All instruments should be calibrated as this is an ISO System requirement and the contractor should furnish test certificate for calibration. Also, please see clause E.4.2 and E.6.3 of Section-E for more details.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- C.21.0 Contractor should maintain moisture free store.
- C.21.1 Illumination system in & around store should be maintained by the contractor.
- C.21.2 All the material stored in the open yard shall be covered by tarpaulins to be arranged by the contractor.
- C.22.0 **PROTECTION OF WORK :**
- C.22.1 Contractor shall effectively protect his work, equipment, material from theft, damage or tempering at his own expenses till the work is finally taken over by the BHEL/Owner.
- C.22.2 Finished work where required, shall be suitably covered to keep it clean and free from defacement or damage.
- C.22.3 Necessary fire protection arrangement is to be made by the contractor for store and place of work.
- C.23.0 **SAFETY MEASURES :**
- C.23.1 All safety rules and codes as applicable to work shall be followed without exception.
- C.23.2 All safety appliances and protective devices including safety belt, hand gloves, aprons, helmets, shield goggles etc. shall be provided by the contractor to his personnel. Also, the Contractor must follow BHEL Quality system to ensure safety in all activities of site work.
- C.24.0 **QUALITY RECORDS (FQPs, MATERIAL MANAGEMENT ETC.)**
- C.24.1 Contractor should follow field quality plan furnished by BHEL to ensure quality in all activities of work performed at site.
- C.24.2 The contractor shall have to maintain records pertaining to Material Verification on receipt at site as well as Daily Receipt Register, Stock Register as per the various quality systems of BHEL.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

- C.25.0 The contractor shall remove all scaffolding, ladders, temporary structures etc. erected by him during erection in order to leave place neat and clean to the satisfaction of the owner.
- C.26.0 All packing/items are to be checked immediately on receipt at site. Any shortages, damages are to be reported to BHEL within a week's time in writing.
- C.26.1 All parts shall be thoroughly cleaned, all rust removed and surface polished as required before erection of any equipment.
- C.26.2 Cleaned and polished parts shall be coated with anti-corrosive paints wherever necessary.
- C.27.0 After completion of work, reconciliation is to be done for all the material issued to the contractor. Balance materials are to be returned to BHEL/Owner.

C.28.0 **WORKING HOURS:**

If in the opinion of BHEL, the progress of the erection work by the contractor at any stage needs expediting so as to ensure completion of work within stipulated time, BHEL shall have the right to instruct the Contractor to increase the Contractor's manpower and working hours and the contractor shall comply with such instructions without any Extra Charges.

C.29.0 **DIVISION OF WORK:**

Prices are to be quoted for schedule of Equipment - E.10.0 of Section-E. Work can be split-up and awarded to more than one contractor as per requirement of BHEL/Owner for timely completion of Project.

C.30.0 **~~INCOME TAX / SALES TAX / WORKS TAX/VAT~~**

Please refer "Annexure to conditions of contract for ETC Work" attached with the tender documents.

Above clause No.C-30.0 stands deleted.Please refer Annexure to conditions of contract for ETC works.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

C.31.0 DISCREPANCIES AND ADJUSTMENT OF ERRORS

- C.31.1 The several documents forming the contract are to be taken as mutually explanatory of one another, detailed drawings being followed in preference to small scale drawings & figures dimensions in preference to scale & special conditions in preference to general conditions.
- C.31.2 In case of discrepancies between schedule of quantities, the specification and/or the drawings the following order of preference shall be observed.
- a) Description in Schedule of Quantities.
 - b) Special Conditions.
 - c) Drawings
 - d) Technical Specifications.
 - e) General Conditions of Contract.
- C.31.3 If there are varying or conflicting provisions made in any one document forming part of the contract, the Engineer shall be deciding authority with regard to the document.
- C.31.4 Any error in the description, quantity in schedule of quantities or any omission there from shall not vitiate the contract or release the contractor from the execution of the whole or any part of the works comprised therein according to the drawings and specifications or from any of his obligations under the contract.
- C.31.5 If on check there are found to be differences between the rates given by the contractor in words and figures or in the amount worked out by him in the schedule of quantities and general summary, the same shall be adjusted in accordance with the following rules. :
- a) In the event of discrepancies between description in words and figures quoted by tenderer, the description in words shall prevail.
 - b) In event of an error occurring in the amount column of schedule of quantities as a result of wrong extension of the unit rate and the quantity, the unit rate shall be regarded as firm and extension shall be amended on the basis of the rates.
 - c) All errors in totalling in the amount column and in carrying forward totals shall be corrected.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

- d) The totals of sections of bill of quantities amended shall be carried over to the general summary and the tendered sum amended accordingly. The tendered sum so altered shall, for the purpose of tender be substituted for the sum originally tendered and considered for acceptance instead of the original sum quoted by the tenderer. Any rounding of quantities or in sections of bill of quantities or in general summary, by the tenderer, shall be ignored.

- C.31.6 If neither drawings nor specifications contain any mention of minor details of construction which in the opinion of the Engineer, whose decision shall be final and conclusive, are reasonable and obviously and fairly intended for satisfactory completion of work, such details shall be provided by the contractor without any extra cost, as if they were specially mentioned and shall be deemed to be included in the contract.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION-D

ERECTION CONDITIONS **OF CONTRACT**

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION - D

ERECTION CONDITIONS OF CONTRACT

D.1.0 GENERAL:

- D.1.1 The following shall supplement the conditions already contained in the other parts of these specifications and documents and shall govern that portion of the work of this contract to be performed at site.
- D.1.2 The contractor upon signing of the contract shall, in addition to a Project Coordinator, nominate another responsible officer as his representative at site suitably designated for the purposes of overall responsibility and co-ordination of the works to be performed at site. Such person shall function from the site office of the contractor during the pendency of the contract.

D.2.0 REGULATION OF LOCAL AUTHORITIES AND STATUTES:

- D.2.1 The contractor shall comply with all the rules and regulations of local authorities during the performances of his field activities. He shall also comply with the **Minimum Wages Act, 1948 and the Payment of Wages Act** (Both of Government of India) and the rules made there under in respect of any employee or workman employed or engaged by him or his sub-contractor.

The Contractor should note that all instructions of Engineer shall be binding for example display of Minimum Wages paid to the workmen, construction of toilets etc. in the vicinity of working area from health and sanitation standpoint etc.

- D.2.2 All registration and statutory inspection fees, if any in respect of his work pursuant to this contract shall be to the account of the contractor. However any registration, statutory inspection fees lawfully payable under the provision of the statutory laws and its amendments from time to time during erection in respect of the plant equipment ultimately to be owned by the Owner/BHEL shall be to the account of the Owner/BHEL. Should any such inspection or registration need to be rearranged due to the fault of the Contractor or his sub-contractor, the additional fees for such inspection and/or registration shall be borne by the contractor.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

D.3.0 OWNER'S LIEN ON EQUIPMENT :

The owner/ BHEL shall have lien on all equipments including those of the contractor brought to the site for the purposes of erection, testing and commissioning of the plants. The Owner/ BHEL shall continue to hold the lien on all such equipments through out the period of contract. No material brought to the site shall be removed from the site by the contractor and/ or his Sub-contractors without the prior written permission of BHEL.

D.4.0 RE-WORKS ETC. :

In case Owner/BHEL/consultant during inspection at site rejects an item already agreed and the same is agreed to by BHEL and any re-execution of works of other contractors and/or his agencies, which might have got damaged or affected by the replacements will have to be attended to by the contractor free of cost.

D.5.0 ACCESS TO SITE AND WORKS ON SITE :

D.5.1 Suitable access to and possession of the site shall be provided to the contractor by Owner/ BHEL in reasonable time.

D.5.2 The works so far as it is carried out on the owner's premises shall be carried out at such time as the owner/BHEL may approve and the Owner/ BHEL shall give the contractor reasonable help/ facility for carrying out the works.

D.5.3 In the executions of the works, no persons other than the Contractor or his duly appointed representative, Sub- contractor and workmen shall be allowed to do work on the site except by the special permission in writing by BHEL.

D.6.0 CONTRACTOR'S SITE OFFICE ESTABLISHMENT:

The contractor shall establish site office at the site and keep posted an authorised representative for the purpose of contract. Any written order or instruction of BHEL or his duly authorised representative shall be communicated to the contractor at the site office and the same shall be deemed to have been communicated to the contractor at his legal address.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.7.0 CO-OPERATION WITH OTHER CONTRACTORS:

D.7.1 The contractor shall co-operate with all other contractors or tradesmen of the owner/BHEL who may be performing other works on behalf of them and the workmen who may be employed by the owner/BHEL doing work in the vicinity of the works under the contract. The contractor shall also arrange to perform his work as to minimise to the maximum extent possible interference with the work of other contractors and his workmen. Any injury or damage that may be sustained to the employees of the other contractors, BHEL and the owner due to the contractor's work shall promptly be made good at contractors own expenses. The owner/ BHEL shall determine the resolution of any difference or conflict that may arise between the contractor and other contractor's or between the contractor and workmen of the owner and BHEL in regard to their work. If the works of the contractor is delayed because of any acts or omission of another contractor, the contractor shall have no claim against the owner/ BHEL on that account other than an extension of time for completing his works.

D.7.2 BHEL shall be notified promptly by the contractor of any defects in the other contractor's works that could affect to the contractor's works. The owner/BHEL shall determine the corrective measures if any, required to rectify this situation which shall be binding on the contractor.

D.8.0 DISCIPLINE OF WORKMEN:

D.8.1 The contractor shall adhere to the disciplinary procedure set by the owner in respect of his employees & workman at site. The owner/BHEL shall be at liberty to object to the presence of any representatives or employee of the contractor at the site, if in the opinion of the owner/ BHEL such employee has misconducted himself or be incompetent or negligent or otherwise undesirable and then the contractor shall remove such a person objected to and provide in his place a competent replacement.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.9.0 CONTRACTOR'S FIELD OPERATION:

D.9.1 The contractor shall keep informed in advance regarding his field activity plans & schedule for carrying out such part of the works. Any review of such plan or schedule or method of work by the BHEL shall not relieve the contractor of any of his responsibilities towards the field activities and its schedule. Such reviews shall also not be considered as an assumption of any risk or liability by the owner/BHEL or consultant or any of his representatives and no claim of the contractor will be entertained because of the failure or inefficiency of any such plan or schedule or method or work reviewed. The contractor shall be solely responsible for the safety adequacy and efficiency of plant and equipments and his erection methods.

D.9.2 The contractor shall be completely responsible for the conditions of the work-site including the safety of all persons employed by him or his sub-contractor and all the properties under his custody during the performance of the work. This requirements shall apply continuously till the completion of contract and shall not be limited to normal working hours.

D.10.0 PHOTOGRAPH AND PROGRESS REPORT:

D.10.1 The Contractor shall furnish to BHEL photographs of the progress of work / work done at site. Photographs shall be taken as & when indicated by BHEL representative. Photograph shall be adequate in size & number to indicate various stages of erection. Each photograph shall contain the date, the name of the Contractor and the title of the Photograph. The cost of photographs is to be born by the Contractor.

D.10.2 The above Photographs along with the soft copy (on floppy/CD) shall accompany the monthly progress report detailing out the progress achieved on all erection activities as compared to the schedules. The report shall also indicate the reasons for the variance between the scheduled and actual progress and action proposed for corrective measures wherever necessary.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.11.0 MANPOWER REPORT:

- D.11.1 The Contractor shall submit to BHEL from the first working day of every month, a Manpower report of the previous month detailing the number of persons scheduled to have been employed and actually employed skill-wise and the areas of employment of such labour.

D.12.0 PROTECTION OF WORK:

The Contractor shall have total responsibility for protecting his works till it is finally taken over by the owner. No claim will be entertained by the BHEL for damage or loss to the Contractor's works & the contractor shall be responsible for the complete restoration of the damaged work to its original condition to comply with the specification & drawings. Should any such damage to the Contractor's works occur because of other party not under him directly, & if disagreement or

conflict or dispute develops between the contractor & the other party or parties concerns works the same will be resolved as per the provisions of the clause D.7.0 above entitled cooperation with other contractors. The contractor shall not cause any delay in the repair of such damaged works because of any delay in the resolution of such dispute. The contractor shall proceed to repair the work immediately & no cause thereof will be assigned pending resolution of such dispute.

D.13.0 EMPLOYMENT OF LABOUR:

- D.13.1 The Contractor will be expected to employ on the work only his regular skilled employees with experience of his particular work. No female labour shall be employed after darkness. No person below the age of eighteen years shall be employed.
- D.13.2 All travelling expenses including provision of all necessary transport to and fro for Site, lodging allowance and other payments to be Contractor's employees shall be the sole responsibility of the contractor.
- D.13.3 The hours of work on the Site shall be decided by the owner/BHEL and the Contractor shall adhere to it. Working hours will normally be eight (8) hours per day Monday through Saturday or depending upon the situation/ requirement.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

D.13.4 Contractor's employees shall wear identification badges while on the work at site.

D.13.5 In the case of owner/BHEL become liable to pay any wages or dues to the labour or to any Government agency under any of the provisions of the Minimum Wages Act, Workmen Compensation Act, Contractor Labour Regulation Abolition Act or any other law due to act or omission of the Contractor, BHEL may make such payment and recover the same from the Contractor's bills or from any amount which is already under process of payment to the Contractor.

D.14.0 FACILITIES TO BE PROVIDED BY OWNER:

D.14.1 Space: The Contractor shall advise BHEL within Fifteen (15) days from the date of acceptance of the Letter of Intent about his exact requirement of space for his office, storage area. The above requirements shall be reviewed by the Owner/BHEL & space will be allotted to the Contractor for construction of his temporary structures like office and storage sheds.

D.14.2 Construction water and power (Electricity) (Refer Clause C.14.0).

D.15.0 FACILITIES TO BE PROVIDED BY THE CONTRACTOR:

D.15.1 CONSTRUCTION EQUIPMENTS, TOOLS, TACKLES AND SCAFFOLDINGS:

The Contractor shall provide all the construction equipments, tools, tackles and scaffoldings required for pre-assembly, erection, testing and commissioning of the equipments covered under the contract. He shall submit a list of all such materials to the BHEL before the commencement of work at Site. These tools and tackles shall not be removed from site without the written permission of the owner/BHEL.

D.15.2 COMMUNICATION:

The Contractor will make his own arrangement for all his communication needs such as telephone, fax etc., at his site office and his residential accommodation.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.15.3 FIRST AID:

The Contractor shall provide necessary first aid facilities for all the employees, representatives and workmen working at the Site. Enough number of contractor's personnel shall be trained in administering first aid.

D.15.4 CLEANLINESS:

D.15.4.1 The Contractor shall be responsible for keeping the entire area allotted to him clean and free from rubbish, debris, etc. during the period of contract. The Contractor shall employ enough number of special personnel to thoroughly clean his work-area at least once in a day. All such rubbish and scrap material shall be stacked or disposed in a place to be identified by the owner/BHEL. Materials and stores shall be so arranged to permit easy cleaning of the area. In areas where equipment might drip oil and cause damage to the floor surface, a suitable protective cover of the flame resistant, oil proof shield shall be provided to protect the floor from such damage.

D.15.4.2 Similarly the labour colony, the office & the residential areas of the Contractor's employees and workmen shall be kept clean & neat to the entire satisfaction of the Owner/BHEL. Proper sanitation arrangements shall be provided by the contractor in the workmen areas, office and residential areas of the contractor.

D.16.0 LINES AND GRADES:

All the works shall be performed to the lines, grades and elevations indicated on the drawings. The Contractor shall be responsible to locate the layout of the works. Basic horizontal and vertical control points as required will be established & marked by the Owner/BHEL at Site at suitable points.

These points shall be used as datum for the works under the contractor. The contractor shall inform the Engineer well in advance of the time and places at which he wishes to do work in the area allotted to him, so that suitable datum points may be established and checked by Owner/BHEL to enable the contractor to proceed with his works. Any work done without being properly located may be removed and/or dismantled by the Owner/BHEL at Contractor's expenses.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.17.0 FIRE PROTECTION:

- D.17.1 The work procedures that are to be used during erection shall be those which minimise fire hazards to the extent practicable. Combustible materials, combustible waste and rubbish shall be collected and removed from the site at least once each day. Fuels, oils and volatile or flammable materials shall be stored away from the construction and equipments and material storage and areas in safe containers. Untreated canvas paper, plastic or other flammable materials shall not at all be used at site for any other purpose unless otherwise specified, if any such materials are received with the equipment at the Site, the same shall be removed and replaced with acceptable materials before moving in to the construction area or storage.
- D.17.2 Similarly corrugated paper fabricated cartons etc., will not be permitted in the construction area either for storage or for handling of materials. All such materials used shall be of water proof and flame resistance type. All other materials such as working drawings, plants etc. which are combustible but are essential for the works to be executed shall be protected against combustion resulting from welding sparks, cutting flames and other similar fire sources.
- D.17.3 All the contractors supervisory personnel and sufficient number of workers shall be trained for fire-fighting and assigned specific fire protection duties. Enough of such trained personnel must be available at the Site during the entire period of the Contract.
- D.17.4 The contractor shall provide enough fire protection equipment of the types and number for the ware-houses, office, temporary structures, labour colony area etc., access to such fire protection equipment shall be easy and kept all times.

D.18.0 SECURITY:

The Contractor shall have total responsibility for all equipments & materials in his custody stored, loose, semi assembled and/or erected by him at site. The contractor shall make suitable security arrangements including employment of security personnel to ensure the protection of all materials, equipments and works from theft, fire, pilferage & other damages and losses. All materials belonging to the Contractors shall enter and leave the project site only with the written permission of the Owner/BHEL in the prescribed manner.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.19.0 CONTRACTOR'S AREA LIMITS:

The Owner will make out the boundary limits of access roads, parking spaces, storage and construction areas for the contractor and the contractor shall not trespass the areas not so marked out for him. The contractor shall be responsible to ensure that none of his personnel move out the areas marked out for his operations. In case of such a need for the contractor's personnel to work in the areas not marked out for him, the same shall be done only with written permission of the Owner/BHEL.

D.20.0 CONTRACTOR'S COOPERATION WITH THE OWNER/ BHEL:

In cases where the performances of the erection work by the contractor affects the operation of the system facilities of the Owner/BHEL such erection work of the contractor shall be scheduled to be performed only in the manner stipulated by the Owner/BHEL and the same shall be acceptable at all times to the contractor. The Owner/BHEL may impose such restriction on the facilities provided to the contractor such as electricity, water etc., as he may think fit in the interest of the Owner/BHEL and the contractor shall strictly adhere to such restrictions and cooperate with the Owner/BHEL. It will be responsibility of the contractor to provide all necessary temporary instrumentation and other measuring devices required during start up and operation of the equipment system which are erected by him. The contractor shall also be responsible for flushing and initial filling of all the oil and lubricant required for the equipment furnished and erected by him, so as to make such equipments ready for operation. The contractor shall be responsible for supplying such flushing oil & other lubricants unless otherwise specified elsewhere in these documents and specifications.

D.21.0 PRE-COMMISSIONING TRIALS AND INITIAL OPERATIONS:

The pre-commissioning trials and initial operations of the equipments furnished and erected by the contractor shall be the responsibility of the contractor as detailed in relevant clauses. The contractor shall provide in addition, test instruments calibrating devices etc. and the labour required for the successful performance of these trials. If it is anticipated that the above test may prolong for a long time, the Contractor's workmen required for the above test shall always be present at site during such trials.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.22.0 MATERIAL HANDLING AND STORAGE:

D.22.1 All the equipments furnished under this contract arriving at site shall be promptly received, unloaded, transported and stored in the storage spaces by the contractor.

D.22.2 Contractor shall be responsible for examining all the shipments immediately on receipt at site and notify BHEL immediately if any damage, shortage, discrepancy. Filling of material verification reports on receipt of materials shall be carried out by the Contractor as per the instructions of Engineer. For any shortages or damages in transit, handling and/or in storage and erection of the equipments at site shall be intimated to BHEL/ equipment supplier promptly to enable them lodge claim with the underwriters. Any financial and/or time loss happened due to contractor's negligence in this regard shall be to the account of the contractor. Any demurrage, wharfage and any other charges claimed by the Transporter or Railways due to any reason attributable to the contractor such as delay in taking delivery in time shall also be to the account of the contractor.

D.22.3 The Contractor shall maintain an accurate and exhaustive record detailing out the list of all equipments received and keep such record open for the inspection of the Owner/BHEL at any time.

BHEL is an ISO Company and the contractor shall extend all help in maintaining records of receipts, issue and stock in line with Material Management System issued by BHEL. Also, he shall assist in periodic inspection of equipment/materials in stores as per this system.

The Contractor shall carryout all field activities related with ETC work as per Field Quality Plans (FQPs) provided by Engineer to ensure Quality of work at site as well as meet the contractual obligation to BHEL/Owner.

D.22.4 All equipments shall be handled very carefully to prevent any damage or loss. No bare wire ropes, slings etc. shall be used for unloading and/or handling of the equipments without the specified written permission of BHEL. The equipment stores shall be properly protected to prevent damage either to the equipment or to the floor where they are stored. The equipment from the store shall be moved to the actual location at the appropriate time so as to avoid damage of such equipment at site.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

- D.22.5 All electrical panels, control gears, motors and such other devices shall be properly dried by heating before they are installed and energised. Motor bearings, slip rings, commutators and other exposed parts shall be protected against moisture ingress and corrosion during storage and periodically inspected. Heavy rotation parts if any, in assembled conditions shall be periodically rotated to prevent corrosion due to prolonged storage.
- D.22.6 All the electrical equipment, such as motors, transformers etc. shall be tested for insulation resistance at least once in three months from the date of receipt till the date of commissioning and record for such measured insulation values maintained by the contractor. Such records shall be open for inspection by the Owner/BHEL.
- D.22.7 The contractor shall ensure that all the packing materials and protection devices used for the various equipments during transit and storage are removed before the equipments are installed.
- D.22.8 The consumable and other supplies likely to deteriorate due to storage must be thoroughly protected and stored in a suitable manner to prevent damage or deterioration in quality by storage.
- D.22.9 All the materials stored in the open or dusty location must be covered with suitable weather proof & flame proof covering materials wherever applicable.
- D.22.10 If the materials belonging to the contractor are stored in areas other than these earmarked for him, the Owner/BHEL will have the right to get it removed to the area earmarked for the contractor at the contractor's cost.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.22.12 STORAGE INSTRUCTION FOR GAS FILLED EQUIPMENTS:

- D.22.12.1 All transformers despatched to site are fitted with Nitrogen cylinder in the tank to maintain positive pressure. It will be the responsibility of the contractor to maintain the pressure and replace the empty Nitrogen cylinder with Nitrogen filled cylinder of required purity at his own cost whenever such cylinders are become empty. Contractor should also maintain the periodic record of the pressure of Nitrogen in the transformer in a register for this purpose.
- D.22.12.2 For all other gas filled equipments, like CTs, VTs, CVTs etc. the contractor should also maintain the gas pressure & if it falls below the required value, contractor should refill the leaked gas of required purity at his own cost.

D.23.0 CONSTRUCTION AND ARRANGEMENTS:

- D.23.1 The field activities of the contractors working at site, will be coordinated by BHEL and BHEL decision shall be final in resolving any dispute or conflicts between the contractor and other contractor's and tradesmen of the BHEL regarding scheduling and coordination of work. Such decisions shall not be cause for extra compensation for time to the contractor.
- D.23.2 The Owner/Consultant shall hold weekly meetings of all the contractors working at the site at a time and a place so designated. The contractor along with BHEL shall attend such meetings and take notes of discussions during the meeting and the decisions of the Owner/BHEL/Consultant shall be strictly adhered to in performing his works. In addition to the above weekly meetings, the Owner/Consultant/BHEL may call for other meetings either with individual contractors or with selected number of contractors and in such a case the contractor, if called will also attend such meetings with BHEL.
- D.23.3 Time is the essence of the contract & the contractor shall be responsible for performance of his work in accordance with the specified construction schedule. If at any time the contractor is falling behind the schedule, he shall take necessary action to make good for such delay by increasing his work force or by working overtime or otherwise accelerate the progress of the work to comply with the schedule and shall communicate such actions in writing to the BHEL satisfying them that his action will compensate for the delay. The contractor shall not be allowed any extra compensation for such action.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- D.23.4 BHEL shall however not be responsible for provision of additional labour and/or materials or supply or any other service to the contractor except for the coordination work between various contractors as set out earlier.

D.24.0 **FIELD QUALITY PLANS AND RECORDS:**

The contractor shall maintain at his Site Office upto date copies of all drawings, specifications, FQPs and other contract documents and any other supplementary data complete with all the latest information thereto. The contractor shall also maintain in addition the continuous record of all changes to the above contract documents, drawings, specifications, supplementary data etc. effected at the field and on completion of his total assignment under the contract, shall incorporate all such changes on the drawings and other engineering data to indicate as installed/build conditions of the equipments furnished and erected under the contract.

Such "AS BUILT DRAWINGS" and "ENGINEERING DATA" shall be submitted to BHEL in required number of copies.

D.25.0 **CONTRACTOR'S MATERIALS BROUGHT ON TO SITE:**

- D.25.1 The contractor shall bring to site all equipments, components, parts, materials, including construction equipment, tools & tackles for the purpose of the works under intimation to the owner/BHEL. All such goods shall, from the time of there being brought to site but may be used for the purpose of the works only and shall not on any account be removed or taken away by the contractor without the written permission of the BHEL.
- D.25.2 After the completion of the works the contractor shall remove from the site under the direction of the BHEL the material such as construction equipment, erection tools and tackles, scaffolding etc. with the written permission of BHEL. If the contractor fails to remove such materials within fifteen (15) days of issue of a notice by the BHEL to do so, then BHEL shall have the liberty to dispose/remove such materials and expanses incurred by BHEL in this regard will be recovered from the Contractor.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.26.0 PROTECTION OF PROPERTY AND CONTRACTOR'S LIABILITY:

- D.26.1 The contractor shall be responsible for any damage resulting from his operation. He shall also be responsible for protection of all persons including members of public and employees of the Owner/BHEL and the employees of other contractors and subcontractors building, other plants and equipments and utilities either above or below the ground.
- D.26.2 The contractor will ensure provisions of necessary safety equipments such as barriers, sign-boards, warning lights and alarm etc. to provide adequate protection to persons and property. The contractor shall be responsible to give reasonable notice to Owner/BHEL of public or private property and utilities when such property and utilities are likely to get damaged or injured during the performance of his work shall make all necessary arrangements with such owners related to removal and or replacement or protection of such property and utilities.

D.27.0 PAINTING:

All exposed metal parts of the equipment including pipings, structures, railings etc. wherever applicable shall be first painted with at least one coat of suitable primer after thoroughly cleaning all such parts off dirt and rust scales, greases, oil and other foreign materials by wire brushing, scraping or/and blasting and the same being inspected and approved by the Engineer for painting. After wards the above parts shall be finished with two coats of enamel paint. The quality of the finish paint shall be as per the standards of ISI equivalent and to be of the colour as approved by the Owner/BHEL.

D.28.0 PROTECTION OF MONUMENTS AND REFERENCE POINTS:

The contractor shall ensure that at points such as relic, antiquity, coins, fossils etc. which he may come across during the course of performance of his works either during excavation or elsewhere are properly protected & handed over to the owner under intimation to BHEL. Similarly the contractor shall ensure that the bench marks reference points etc. which are marked out either with the help of owner or by BHEL shall not be disturbed in any way during the performance of his works. If any work is to be performed which may disturb such references, the same shall be only after these are transferred to other suitable locations under the direction of BHEL. The contractor shall provide all necessary materials and assistant for such relocation of reference points etc.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

D.29.0 WORK AND SAFETY REGULATIONS:

- D.29.1 The contractor shall ensure the safety of all the workmen, materials, and equipment either belonging to him or to others working at site.
- D.29.2 The contractor will notify the BHEL office of his intention to bring on to site any equipment or any container with liquid or gases, fuel or other substances which may create hazards. BHEL shall have the right to prescribe the conditions under which such equipment or container may be handled and used during the performance of the works and the contractor shall strictly adhere to such instructions. BHEL shall have strictly the right to inspect any construction plant and to forbid its use, if in his opinion it is unsafe. No claim due to such prohibition shall be entertained by BHEL.
- D.29.3 Where it is necessary to provide and/or store petroleum products or petroleum mixtures & explosive, the contractor shall be responsible for carrying out such provision and/or storage in accordance with the rules and regulations laid down in Petroleum Act, 1934. Explosively Act, 1948 and petroleum and carbide of calcium manual published by the Chief Inspector Of Explosive of India. All such storage shall have prior approval of BHEL in case any approval are necessary from the Chief Inspector of Explosive of any statutory authorities, the contractor shall be responsible for obtaining the same.
- D.29.4 The contractor shall be responsible for the safe storage of his & his sub-contractor's radio-active source if any.

D.30.0 ELECTRICAL SAFETY REGULATIONS:

- D.30.1 In no circumstances will the contractor interfere with fuses and Electrical Equipment belonging to BHEL/Owner or to the other contractors.
- D.30.2 Before the contractor connects any electrical appliances to any plug or sockets belonging to the other contractor or Owner, he shall:
- (a) Satisfy the Owner/BHEL that the appliances are in good working conditions.
 - (b) Inform the Owner/BHEL of the maximum current, relating, voltage etc. of the appliances.
 - (c) Obtain permission of the Owner detailing the sockets to which the appliances may be connected.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- D.30.3 The BHEL will not grant permission to the contractor until he satisfies that:
- (a) The appliance is in good conditions and fitted with suitable plug.
 - (b) The appliance is fitted with a suitable cable having proper earthing provisions.
- D.30.4 No cable in use will be disturbed by the contractor without prior permission. No weight of any description will be imposed on any such cable and no ladder or similar equipment will rest against or attached to it.
- D.30.5 No work shall be carried out on any live equipment. The equipment must be made safe by the BHEL/Owner and a permit to work issued before any work is carried out.
- D.30.6 The contractor shall employ the necessary number of qualified full time electrician to maintain his temporary electrical installation.
- D.31.0 **CONSUMABLES:**
- The contractor shall make arrangements for an adequate inventory at site of necessary consumable prior to erection so that the requirements of the same will not come in the way of timely completion of the works under the contract.
- D.32.0 **MILD STEEL AND ALUMINIUM WELDING & OTHER SPECIAL PROCESSES :**
- D.32.1 Only an approved and qualified welder shall be employed by the contractor. The welder will be subjected to pre-qualification test by Owner/BHEL.
- D.32.2 The Contractor shall ensure that personnel employed for doing other special processes like tube/pipe bending etc. are having proper experience and are qualified for doing such work.
- D.32.3 Erection of Aluminium tubular bus bar shall include cutting, bending, aluminium welding with sleeves (sleeves supplied by BHEL), Radiographic testing and D.P test of 100% welded joints, fixing corona end bells etc to complete.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- D.32.4 For MS welding, red lead paint shall be applied followed by aluminium paint and bitumen after welding. For GS welding , two coats of cold galvanising anti-corrosive paint shall be applied after welding. In case any special process is indicated in customer's specification, then the same shall be applicable.
- D.32.5 10% welded joints in earthing shall be tested for Dye penetration test.

SECTION – E

SCOPE OF WORK AND **COMPLETION** **SCHEDULE**

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

SECTION - E

SCOPE OF WORK AND COMPLETION SCHEDULE

E.1.0 SCOPE OF WORK :

The scope of work of the successful tenderer shall comprise but not limited to the following. The Tenderer shall read this scope of work in conjunction with all terms and conditions (Section -A,B,C & D) contained else where in this document. The quoted rates for various equipments/activities are deemed to include all the below mentioned activities and nothing extra is payable on account of these.

- E.1.1 For Contractor supplied materials:** It shall be prime responsibility of contractor to ensure safe storage of material supplied by him. The contractor may construct open/ covered store to ensure proper storage of the materials as per site requirement. Contractor will be permitted to dismantle and take back the stores after completion of the work. No additional payment shall be made/deducted on account of stores constructed by contractor for storing these materials.

For BHEL supplied materials: Contractor shall construct open/ covered store only if the same is mentioned in the Bill of Quantities.

If due to any reason the material can not be unloaded in designated store/open yard and it is unloaded at some nearby place on instructions of site Engineer then this material has to be shifted by subcontractor to designated store/open yard when it is ready without any additional claim. Any multiple handling of material within project premises is not payable by BHEL

Some items may get delivered at stores of other BHEL unit on account of convenience of despatch within the plant area. These material will be collected/shifted by subcontractor to switchyard store at no extra cost.

- E.1.2.1** Inspection / verification of equipment / materials received for any shortage / damage after opening the packing cases and intimating the same to BHEL/ Owner and underwriters within the time period specified by BHEL and to strictly follow the procedures specified. Storage of equipment indoor / open stores in line with the instructions of the manufacturer / BHEL.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

Conservation / maintenance / upkeep of the equipment in the store.

Temporary lighting in stores & construction area wherever required.

Safety / Security of equipments / materials.

E.1.2.2 **Watch and ward of Erected Equipment/Material** - Soon as the erection of switchyards are taken up, the watch and ward for the erected items will also be arranged by the subcontractor till the switchyards are taken by BHEL/customer

E.1.3 Erection, levelling and fixing of GI Structures of towers, beams including all the equipment support structures on their respective foundations in line with drawings to be furnished by BHEL. Final adjustment of foundation levels by chipping and dressing, checking location, elevation, etc., and checking position of foundations / anchor bolts and grouting/under pinning of anchor bolts and base plates wherever necessary for certain aux. equipment and accessories of main equipment. Materials such as M.S. packing shims of required thickness for levelling and alignment and civil material for final grouting with 1:1 cement mortar with approved make anti-shrinkage compound and finishing shall be arranged by contractor. *The grouting/underpinning of all tower and equipment foundation bolts as per specifications is in the scope of Contractor ie Bidder.*

Fixing and assembly including minor modification, where required, of all cable trench materials like cable tray racks, cable trays, coupler plates, 'T' and 'L' bends etc in line with drawings to be furnished by BHEL. The work shall also covers laying of all cables including glanding and termination for all the equipments covered under BOQ . At various crossing and wherever necessary the cables to pass through pipes laid underground in line with drawing to be furnished by BHEL. Pipes will be supplied by BHEL for cabling from trench to equipment and laying of the same including excavation and backfilling and making and finishing of holes in trench walls will be carried out by the contractor.

E.1.4 Transportation of equipment/material from stores to erection site, erection of equipment materials in line with the drawings/instructions to be furnished by BHEL including filtration of oil wherever required, testing and commissioning and handing over to owner/customer.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- E.1.5 Earthing (if called for in BOQ) : laying of earth mat and risers including excavation, bending, cutting, welding, cleaning and painting of joints, backfilling and earth compaction etc. as per BHEL drawings/specifications.

Cutting, pointing and driving of MS rod electrode, installation of pipe electrode and construction of chambers as per drawings.

Earth connections from risers to equipment, structures etc. through GI flat including bending, cutting, welding, cleaning and painting of welded joints as per BHEL's drawings/specifications.

Welding electrode should be of reputed make company ISI certified, and as per BHEL's specifications.

- E.1.6 Providing for all consumables : It shall be noted by the tenderer that BHEL shall supply only the equipments/materials listed in schedule of equipments as free issue items. Any other sundry items required for completion of the job shall be procured by the contractor.

All Equipment fixing hardware shall be arranged by BHEL.

All cable glands shall be arranged by BHEL. However cable accessories like ferrules, lugs and markers, cable dressing and tying material etc. shall be in the scope of the contractor. The lugs shall be of reputed make company and as advised by BHEL site Incharge.

- E.1.7 Maintenance of switchyard and associated equipment till handing over to the owner, any other activity necessary for completion of the job but not specifically mentioned in this specification.
- E.1.8 Unloading, shifting, storing, verification, preservation during storage and handing over of spare items/maintenance equipment to Customer/Owner.
- E.1.9 Reconciliation and shifting of all the balance excess material and scrap material to BHEL store or handover in customer store, as the case may be.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

This excess material may include erection spares for various items of BOQ such as ACSR/AAC conductor, Al tube, Cable trench materials, Cables etc. Excess erection spare (except main equipment) supplied by purchaser upto 10% of the erected quantity shall be absorbed by the contractor & shall not be payable. Only as erected quantity of the various items of BOQ shall be payable as per the unit rates. However, any erection spares (excluding main equipment) handled in excess of 10% of the erected quantity shall be payable @ 10% of the unit rate (to account for only unloading, storage and watch & ward. However, any additional quantity of main equipment, handled but not erected, shall be paid @ 10% of the item rate.

E.2.0 ERECTION, TESTING & COMMISSIONING REQUIREMENTS :

- E.2.1 All the switchyard equipment shall be erected, installed, tested and commissioned by the contractor to the satisfaction of BHEL/Owner adhering to the latest national standard and codes. Some of the Reference standards are given below which are normally applicable for Switchyard work. ETC activity of all other equipment to be done as per relevant standards.
- a) IS : 10118-1982 Code of practice for selection, installation and maintenance of switchgear & control gear.
 - b) IS : 10028-1985 Code of practice for installation and maintenance of transformer.
 - c) IS : 732-1963 Code of practice for electrical wiring.
 - d) IS : 3043-1963 Code of practice for earthing.
 - e) IS : 2309-1989 Code of practice for the protection of building and allied structure against lightning.
 - f) IS : 1646-1982 Code of practice for fire safety of building (General) Electrical installations.
- E.2.2 All electrical equipment and installations shall also conform to the latest Indian Electricity rules as regards safety, earthing and other essential provisions specified therein for insulation and operation of electric plants.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- E.2.3 Earthing system, earth connections, testing of earthing system and connection, lightning protection system, electrical clearance and safety shall be strictly followed as per the national specifications which will be given to the successful bidder.
- E.2.4 The schedule of equipment indicates the quantity of the equipment and these will be procured by BHEL and are to be erected by the contractor. The contractor has to erect, test all equipment for system commissioning and putting the same into operation. The trial run of individual equipment and final commissioning upto the handing over of the system to the customer of BHEL is the responsibility of the contractor.
- Contractor will have to provide necessary support i.e.. suitable manpower, common tools, conventional testing instruments as per Annexure 'N' and other assistance as required by BHEL wherever expert services of any equipment are arranged by BHEL viz.. SF6 circuit breakers.
- E.2.5 All equipments, material and accessories provided by the contractor shall conform to the requirements of the relevant Indian standard or International standard.
- E.3.0 **METHOD OF WORKMANSHIP & QUALITY OF WORK:**
- E.3.1 Workmanship will be in accordance with the best engineering practices to ensure satisfactory performances and service life.
- E.3.2 All works shall be installed in a first class manner with technical skill in the trade involved to achieve quality of work of high standard. BHEL site supervisor's comments regarding quality of work should be taken care by the contractor.
- E.3.3 The erection work shall be supervised by the competent supervisor holding supervisory license by the state or central Government or statutory licensing authority, as the case may be.
- E.3.4 The installation shall be carried out in such a manner not to obstruct access to the other equipment installed or likely to be installed in the vicinity.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

E.3.5 The complete erection shall be performed in accordance with the modern practices for similar substation equipments.

E.4.0 **EQUIPMENT, MATERIAL & SERVICES TO BE FURNISHED**

E.4.1 The contractor shall employ sufficient labours, skilled, unskilled, supervisory and administrative personnel for timely and effective execution of the contract.

E.4.2 The contractor shall arrange as per Annexure - Q erection tools and tackles, mobile crane, all transport vehicles, measuring & testing equipments necessary for timely and effectively execution of the contract. All measuring & testing instruments shall be pre-calibrated through a certifying agency before use. The certificate of calibration shall be submitted to Engineer for records. In case Contractor is unable to provide the calibrated measuring and test instruments then 'ENGINEER' according to his own wisdom / judgement can recommend a deduction of maximum limit up to 5% from the Contractor's bill. But this in no way relieves the Contractor from arranging the test & measuring instruments / equipment as required for completion of work without affecting the quality of work and meeting any Contractual obligation whatsoever.

E.4.3 All equipment including individual component fittings and accessories shall be properly stored at site so as to obviate any deterioration of electrical properties and mechanical damages.

E.4.4 All equipment shall be thoroughly cleaned of packing materials, scales rust, oil grease etc. prior to commencement of the installation work.

E.4.5 All equipment shall be checked physically for the completeness of all components and devices before taking up installation.

E.4.6 The contractor shall repair all minor defects in equipment, free of charge, if required prior to installation in consultation with equipment manufacturer of BHEL, so that manufacturer's guarantee is not affected in any way. In case of any major damage to the equipments, the same shall be rectified or replaced by the manufacturer's representatives with the approval of BHEL / Owner.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

- E.4.7 All equipments and accessories shall be installed strictly in accordance with the manufacturer's instructions / drawings. Equipment supplied in sections or in dismantled conditions shall be re-assembled at site with all associated accessories as per manufacturer's instructions.
- E.4.8 If the services of BHEL engineers, suppliers, and / or of any equipment manufacturers are required by the contractor at any stage of work, it will be made available on chargeable basis at existing rates prevailing at that time.
- E.4.9 All consumable items required to carry out welding, brazing, soldering etc. for the erection and commissioning is included in the offer of contractor and shortages in hardware (due to careless / negligent handling at site) to be made up free of cost by the contractor. The quality of such replenishment shall be at par with main supply and to be acceptable to BHEL / Owner.
- E.4.10 The successful contractor should note that after execution of work they will send marked up drawings "as erected" drawings to Project Manager at site for preparation of firm "AS BUILT" drawings. "AS BUILT" drawings will bear the signature of Project Manager of BHEL and Contractor's representative.
- E.4.11 **OIL FILTRATION (IN CASE OF TRANSFORMERS COVERED IN BOQ):**

An extra high vacuum oil filtration plant with a minimum of thousand GPH capacity shall be employed by the contractor for oil filtration.

An empty oil tank of minimum of 12000 ltrs. capacity also shall be arranged by the contractor to prepare the oil before pushing it into the transformer.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

E.5.0 TESTING AND COMMISSIONING OF EQUIPMENT:

- E.5.1 The testing of all electrical equipment as well as the system as a whole shall be carried out to ensure that the equipment and its components are in satisfactory condition and will successfully perform its functional operation. All required tests shall be carried out by the contractor using his own instruments, testing equipments as well as qualified testing personnel. The tests on power transformer (if covered in BOQ) shall include winding resistance, tan-delta, PPM of moisture, acidity in oil. For SF-6 Circuit Breaker (if covered in BOQ) closing and tripping timing test shall also be carried out in addition to other routine tests.
- E.5.2 At site all equipments shall be energised only after certification by the personnel performing the test that the equipment is ready for energising and with the concurrence of BHEL / Owner.

E.6.0 PREPARATION FOR COMMISSIONING:

- E.6.1 After completion of the installation at site and for the preparation of system commissioning the contractor shall carry out checking and testing of all equipment and installation in accordance with the agreed standards, codes of practices of Indian Standards Institutions and specific instruction furnished by the particular equipments suppliers as well as the Owner.
- E.6.2 Required checking to be made on all equipment and installation at site. This shall include but not limited to the following:
- a) Physical inspection for removal of any foreign bodies external defects such as damaged insulators, loose connecting bolts, loose foundation bolts etc.
 - b) Check for grease insulating / lubricating oil leakage and its proper level / quantity.
 - c) Check for free movement of mechanism of the circuit breaker / isolator and rotating parts of other rotating machine and devices.
 - d) Check for tightness of all the cables, busbars as well as earth connection in the main earthing net work.
 - e) Check for clearance of live busbar and conductors from the metal enclosures.
 - f) Continuity check in case of power and control cables.

**BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.**

Conditions of Contract for Erection Works, Rev-02

- g) Checking of all mechanical and electrical interlocks, including tripping of breakers using manual operation of relay.
 - h) Checking of alarm and annunciation circuits by manual actuation of relevant relays like buchholz relay in case of transformer.
 - i) Check and calibrate devices requiring field adjustments / calibration like adjustment of relay setting etc.
 - j) Check proper connection to earth-mat work of all non current carrying parts of equipments & installation.
- E.6.3 All the measuring and testing instruments will be arranged by the contractor and while submitting his quotation he shall furnish list of testing equipments which are readily available with him and also which can be procured by him from outside agency for the purpose of testing and commissioning.
- E.7.0 **MINOR CIVIL WORK:**
- E.7.1 Minor civil works including secondary grouting/under pinning of structure i.e. filling the gap between structure and foundation after levelling, alignment shall be done by the contractor at no extra cost. This shall also include necessary materials required for doing the work.
- E.7.2 Minor civil works of final / secondary grouting of structures, towers equipment has to be arranged by the contractor and the rate for the same should be included in respective erection. Final / secondary grouting means filling the gap between the structure and foundation after levelling, alignment etc.
- E.7.3 Minor civil work shall also include fixing of foundation bolts for radiator / cooling oil pump etc. Foundation bolts for such work shall however be arranged by BHEL.

BHARAT HEAVY ELECTRICALS LTD.
TRANSMISSION BUSINESS GROUP, NEW DELHI.
Conditions of Contract for Erection Works, Rev-02

E.8.0 PRICE SCHEDULE

E.8.1 The prices to be quoted FIRM and should be valid till the work is completed to the satisfaction of BHEL / Owner and handed over the system to Owner.

E.8.2 The quantities given in schedule of equipment are estimated ones and may vary up to $\pm 30\%$ on the total value of the contract. Quantity of individual item may vary up-to any extent.

E.9.0 START OF WORK AND COMPLETION SCHEDULE

E.9.1 The contractor shall mobilise at site within one week from the date of LOI.

E.9.2 The entire work under this tender is required to be completed as indicated in Letter of Intent.

E.9.3 Detailed Bar Chart (activity schedule) should be submitted by the bidder in Annexure 'M' showing as to how the work is proposed to be executed in order to meet the completion schedule. This shall be filled in by the bidder after mobilisation at site and to be given to ENGINEER-IN-CHARGE at site.

E.9.4 The contractor is required to commence the work within the time as indicated in Letter of Intent failing which the contract is liable to be cancelled and EMD/SD shall be forfeited.

E.10.0 SCHEDULE OF EQUIPMENT:

The estimated quantities in the Schedule of Equipment given in Annexure-1 is tentative to give idea of work and to enable tenderer to quote unit rates. The actual quantities required to be erected shall be based on relevant drawings and latest revisions.

ANNEXURE TO CONDITIONS OF CONTRACT FOR ETC WORKS

The following terms and conditions shall form a part of the tender document. If any discrepancies found between below mentioned clauses and clauses in the Conditions of Contract for Erection Works, DOC. NO. – TB-ETC-GCC, REV.-02, dated 20th JUNE, 2005, the clauses mentioned in this annexure shall prevail.

A. Condition of Contract for Erection works (DOC. NO. – TB-ETC-GCC, REV.-02, 20th June, 2005):

A. 1.0: GENERAL INSTRUCTION

1.1 **All pages of the tender documents shall be duly signed, stamped and submitted along with the offer in token of complete acceptance thereof.** The information furnished shall be complete by itself. The tenderer is required to furnish all the details and other documents as required in the following pages.

1.2. Tenderers are advised to study all the tender documents carefully. Any submission of tender by the tenderer shall be deemed to have been done after careful study and examination of the tender documents and with the full understanding of the implications thereof. Should the tenderers have any doubt about the meaning of any portion of the Tender Specification or find discrepancies or omissions in the drawings or the tender documents issued are incomplete or shall require clarification on any of the technical aspect, the scope of work etc., tenderer shall at once, contact the authority inviting the tender well in time (so as not to affect last date of submission) for clarification before the submission of the tender. Tenderer's request for clarifications shall be with reference to Sections and Clause numbers given in the tender documents. The specifications and terms and conditions shall be deemed to have been accepted by the tenderer in his offer. Non-compliance with any of the requirements and instructions of the tender enquiry may result in the rejection of the tender.

A.2.0 PROCEDURE FOR SUBMISSION OF SEALED TENDERS

A.2.1 Bidders may please refer CI no. 2 to CI no. 4 of the Notice inviting tender.

A.2.2 The tenders received after the specified time of their submission shall be treated as 'Late Tenders' and shall not be considered under any circumstances.

A.2.3 Tenders shall be opened by the officers concerned of BHEL at the time, date and venue as specified in the tender enquiry. Tenderer or their authorized representative may witness the bid opening.

A.2.4 The tenderer shall closely pursue all the clauses, specifications and drawings indicated in the Tender Documents before quoting. Should the tenderer have any doubt about the meaning of any portion of the Tender Specifications or find discrepancies/omission in the drawings or the tender documents issued are incomplete or shall require clarification on any of the technical aspect, scope of work etc. he shall at once contact the authority inviting the tender for clarification before the submission of the tender.

A.2.5 Before submission of offer, the tenderers are advised to inspect the work & the environments and be well acquainted with the actual working and other prevalent conditions, facilities available, sourcing of material and labour, means of transport and access to site, accommodation, etc. No claim will be entertained later on the grounds of lack of knowledge on any of these conditions/ resources.

- A.2.6 Tenderer must fill up all the schedules and furnish all the required information as per the instructions given in various sections of the tender specification. Each and every page of the Tender Specification must be SIGNED AND SUBMITTED ALONG WITH THE OFFER by the Tenderer in token of complete acceptance thereof the information furnished shall be complete by itself.
- A.2.7 The tenderer shall quote the rates in English Language and international numerals. Total price offered should be entered in figures as well as in words. For the purpose of the tender, the metric system of units shall be used.
- A.2.8 **The tenderer shall quote a percentage above/ below/At Par the rates shown in the “Bill of Quantities Cum Price Schedule (Annexure-I)” of subject tender.**
- A.2.9 **The quoted percentage will apply to the individual items of “Annexure-I i.e Bill of Quantity Cum Price Schedule” uniformly.**
- A.2.10 All entries in the tender shall either be typed or be written legibly in ink. Erasing and overwriting are not permitted and may render such tender liable for rejection. All cancellations and insertions shall be duly attested by the tenderer.
- A.2.11 The tenderer must provide the registered e-mail of their registered office along with the addresses and authorised phone/mobile nos.

A.3.0 ADJUSTMENT PRICE DISCREPANCY (IES): - Not Applicable being e procurement.

A.4.0 EVALUATION OF TECHNICAL BIDS

- 4.1 Technical Bids submitted by the tenderer will be opened first and evaluated for fulfilling the Pre-Qualification criteria and other conditions in NIT/Tender documents, based on documentary evidences submitted along with the offer.
- 4.2 In case the same qualifying experience is claimed by more than one bidder due to subletting of work by main contractor to subcontractor (s) then following conditions shall be applicable.
- a) For labour + consumable contract without material and T&P:
Benefit of work experience shall be given to the subcontractor who has actually executed job and not to the contractor offloaded down the line.
 - b) For contract with complete scope i.e. with materials, T&P, labour and consumable:
 - i) Benefit of work experience shall be given to the subcontractor who has actually executed job and not to the contractor offloaded down the line.
 - ii) If the contractor offloads the labour and/or T&P portion only, benefit of work experience shall be given to the main contractor and not to the subcontractor who has executed only as labour supply contractor

The bidder's qualification shall be subject to submission of documentary proof. BHEL reserves the right to ask for further proofs including submission of TDS certificates/ for the said job

- 4.3 In case the qualifying experience is claimed by private organizations based on Work Order and completion certificates from another private organization, BHEL reserves the right to ask for further proofs including submission of TDS certificates/ form 26AS /bills for the said job.
- 4.4 Credentials of all the bidders participating in open tender will be scrutinized thoroughly by the nominated committee w.r.t. the pre-qualifying requirement for the tender.
- 4.5 Details of qualifying work(s) executed by the bidder will be forwarded to the principle employer for verification of the work with respect to completion, commencement & completion date, scope and value of the work executed. Performance feedback of the bidder will also be sought from the principle employer.
- 4.6 BHEL may conduct onsite verification of at least one of the qualifying works to verify completion of the work and evaluate capability and performance of the bidder.
- 4.7 The bidder representative may be called for the discussion with the committee. His originals may be verified by the committee. In addition to above their organization chart and detailed list of manpower, tools & plants and technical capability may be discussed and ascertained by the committee.

A.5.0 EVALUATION OF PRICE BIDS

- 5.1 Price Bids of unqualified bidders shall not be opened.
- 5.2 The offers will be evaluated on the basis of total price basis (refer "BILL OF QUANTITY AND PRICE SCHEDULE) as shown in the price bid.
- 5.3 Reasons for rejection of the bid shall be intimated in due course after issue of LOI/LOA to successful bidder and receipt of unconditional acceptance of LOI /LOA from the successful bidder
- 5.4 In case of electronic Reverse Auction, the unqualified bidders shall not be allowed to participate in reverse auction.

A.6.0 DOCUMENTS TO BE ENCLOSED:

Full information shall be given by the tenderer in respect of the following.

- 6.1 Tenders shall be signed by persons duly authorized/empowered to do so. An attested copy of the Power of Attorney to be submitted in all cases except where the sole proprietor is the signatory to the tender documents

6.2 PERMANENT ACCOUNT NUMBER:

Certified copies of Permanent Account Numbers as allotted by Income Tax Department for the Company / Firm / Individual Partners, etc. shall be furnished along with tender.

6.3 AUDITED BALANCE SHEET AND INCOME TAX RETURN:

Copy of Audited Balance sheets and income tax return for last three financial years (financial years as specified in PQR)

6.4 SOLVENCY CERTIFICATE:

If asked in NIT, bidder should submit solvency certificate (not older than 12 months from date of tender notification) issued by any scheduled bank.

6.5 DOCUMENT RELATED TO INCORPORATION OF BUSINESS ENTITY:

6.5.1 IN CASE OF INDIVIDUAL TENDERER:

His/her full name, address and place & nature of business.

6.5.2 IN CASE OF PARTNERSHIP FIRMS:

The names of all the partners with address. A copy of the partnership deed/instrument of partnership duly certified by the Notary shall be enclosed.

6.5.3 IN CASE OF COMPANIES:

Date & place of registration including date of commencement certificate in case of Public Companies and the nature of business carried on by the company. Certified copies of Memorandum and Articles of Association are also to be furnished.

6.6 Offer forwarding letter over the letterhead

6.7 *Declaration sheets (As per Prescribed format) over the letter head*

6.8 *No Deviation certificates (As per Prescribed format) over the letterhead*

6.9 GST Registration certificate

All the data required to be enclosed with the tender need to be furnished neatly typed, signed & stamped in the given formats only (in the form of separate sheets) failing which the tender may be considered as incomplete and is liable for rejection. Documentary proof wherever necessary also need to be enclosed.

A.7.0 VALIDITY OF OFFER

The rates in the Tender shall be kept valid for acceptance for a minimum period of **Four Months** from latest due date of offer submission (including extension(s), if any). In case BHEL (Bharat Heavy Electricals Limited) calls for negotiations, such negotiations shall not amount to cancellation or withdrawal of the original offer which shall be binding on the tenderer.

A.8.0 REJECTION OF TENDER & OTHER CONDITIONS:

8.1 The decision of acceptance of tender will rest with BHEL which does not bind itself to accept the lowest tender or any tender and reserves to itself full rights for the following without assigning any reasons whatsoever:

(a) To reject any or all of the tenders.

(b) To split up the work amongst two or more Tenderer as per NIT

(c) To award the work in part as per NIT

(d) In either of the contingencies stated in (b) and (c) above to modify the time for completion suitably.

8.2 Conditional tenders, unsolicited tenders, containing abnormally low/ unworkable rates & amounts, tenders which are incomplete or not in the form specified or defective or have been materially altered or not in accordance with the tender conditions, specifications etc. are liable to be rejected.

- 8.3. Tenders are liable to be rejected in case of unsatisfactory performance of the tenderer with BHEL, or tenderer under suspension (hold / banning / delisted) by any unit / region / division of BHEL or tenderers who do not comply with the latest guidelines of Ministry / Commissions of Govt. of India. BHEL reserves the right to reject a bidder in case it is observed that they are overloaded and may not be in a position to execute this job as per the required schedule in line with 'NIT'. The decision of BHEL will be final in this regard.
- 8.4 In case of any adverse information is received concerning performance, capability or conduct of the tenderer after issue of tender enquiry or opening of tender or award of work, BHEL reserves the right to reject the offer at any stage as deemed fit.
- 8.5 Offers with inadequate Tools & Plants, Manpower Deployment Plan, and Method Statement are liable for rejection.
- 8.6 If a tenderer who is a proprietor expires after the submission of his tender or after the acceptance of his tender, BHEL may at its discretion, cancel such tender. If a partner of a firm expires after the submission of the tender or after the acceptance of the tender, BHEL may cancel such tender at its discretion unless the firm retains its character.
- 8.7 BHEL will not be bound by any Power of Attorney granted by the tenderer or by changes in the composition of the firm made subsequent to the execution of the contract. BHEL may, however, recognise such Power of Attorney and changes after obtaining proper legal advice, the cost of which will be chargeable to the contractor concerned.
- 8.8 If the tenderer deliberately gives wrong information in his tender, BHEL reserves the right to reject such tender at any stage or to cancel the contract, if awarded, and forfeit the Earnest Money/Security Deposit/any other moneys due.
- 8.9 Canvassing in any form in connection with the tender is strictly prohibited and the tenders submitted by the tenderer who resorts to canvassing are liable to be rejected.
- 8.10 In case the Proprietor, Partner or Director of the Company / Firm submitting the Tender, has any relative or relation employed in BHEL, the authority inviting tender shall be informed to the fact as per specified format along with the offer, failing this, BHEL may, at its sole discretion reject the tender or cancel the contract and forfeit the Earnest Money/ Security Deposit.
- 8.11 The successful tenderer should not sub-contract the part or complete work detailed in the tender specifications without written permission of BHEL's Site In charge/ Sector Head. For this the contractor shall submit request application to site in charge supported by credentials (financial and technical) and resource mobilisation schedule of such sub-contractor. Such request is to be considered in consultation with end user/ultimate customer (if applicable) and subject to satisfactory credentials, fund flow arrangement between them, HSE and other contractual and statutory obligations. The tenderer is solely responsible to BHEL for the work awarded to him.
- 8.12 The Tender submitted by a tenderer shall become the property of BHEL who shall be under no obligation to return the same to the bidder. However unopened price bids and late tenders shall be returned to the bidders.
- 8.13 unsolicited discount received after the due date and time of Bid Submission shall not be considered for evaluation. However, if the party who has submitted the unsolicited discount/rebate becomes the L-I party, then the awarded price i.e contract value shall be

worked out after considering the discount so offered.

- 8.14 BHEL shall not be liable for any expenses incurred by the bidder in the preparation of the tender irrespective of whether the tender is accepted or not.

A.9.0 NO DEVIATIONS ARE ACCEPTABLE: -

Offers with deviations are likely to be rejected. However, if the bidder insists on any technical or commercial deviations from the specifications and / or tender conditions, **the price implication, if any, of withdrawing the deviations must be submitted along with the price bid in a separate sealed envelope** super-scribed "**PRICE IMPLICATION FOR WITHDRAWAL OF DEVIATIONS**". No price implication for withdrawal of deviation shall be accepted at a later date, after opening of technical bid.

A.10.0 Consortium/ JV bidding is not allowed under this NIT.

B. EARNEST MONEY DEPOSIT

EMD is not applicable for this Tender.

C. SECURITY DEPOSIT

Security Deposit means the security provided by the Contractor towards fulfilment of any obligations in terms of the provision of the contract.

1. Upon acceptance of Tender, the successful Tenderer should deposit the required amount of Security Deposit for satisfactory completion of work. **The total amount of Security Deposit will be 5% of the Contract Value.**

2. Mode of Security deposit:

The security Deposit should be furnished **before start of the work** by the contractor.

"Bidders agrees to submit performance security required for execution of the contract within the time period mentioned. In case of delay in submission of Performance security, enhanced performance security which would include interest (**Repo rate + 4%**) for the delayed period, shall be submitted by the bidder.

Further, if performance security is not submitted till such time the first bill becomes due, the amount of performance security due shall be recovered as per terms defined in NIT / Contract, from the bills along with due interest".

The balance amount to make up the required Security Deposit of 5% of the contract Value may be furnished in any of the following forms:

- i) Cash (as permissible under the extant Income Tax Act)
- ii) Local cheques of scheduled banks (subject to realization) / Pay Order / Demand Draft / Electronic Fund Transfer, in favour of BHEL.
- iii) Bank Guarantee from Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The Bank Guarantee format for Security Deposit shall be in the prescribed formats enclosed with general conditions of contract.
- iv) Fixed Deposit Receipt issued by Scheduled Banks / Public Financial Institutions as defined in the Companies Act. The FDR should be in the name of the contractor, A/C BHEL and duly discharged on the back.

- v) Securities available from Indian Post Offices such as National Savings Certificates, Kisan Vikas Patras etc. (Certificates should be held in the name of Contractor furnishing the security and duly endorsed/hypothecated/pledged, as applicable, in favour of BHEL and duly discharged on the back).
- vi) Insurance Surety Bonds.

(NOTE: BHEL will not be liable or responsible in any manner for the collection of interest or renewal of the documents or in any other matter connected therewith)

3. **Submission of Security Deposit:**

- i) At least 50 % of the required Security Deposit shall be submitted before start of work. Balance of the Security Deposit can be submitted by way of deduction of 10% of the gross amount progressively from each running bills of the contractor till the total amount of the required Security Deposit is collected.
 - ii) In case of delay in submission of performance security, enhanced performance security which would include interest (Repo rate + 4%) for the delayed period, shall be submitted by the bidder.
 - iii) If the value of work done at any time exceeds the contract value, the amount of Security Deposit shall be correspondingly enhanced and the additional Security Deposit shall be immediately deposited by the Contractor or it shall be recovered from payment/s due to the Contractor.
 - iv) The recoveries made from running bills (cash deduction towards balance SD amount) can be released against submission of equivalent Bank Guarantee in acceptable form, but only once, before completion of work, at the discretion of BHEL.
4. The BG shall be submitted only through the Banker. Along with the BG, the Bank shall also furnish a letter of confirmation (in the prescribed formats enclosed with general conditions of contract).
5. The validity of the Bank Guarantee furnished towards Security Deposit shall be up to three months more than the period of completion of work as stipulated in the LOI and the same will be kept valid by proper renewal till the completion of the work.
6. BHEL reserves the right of forfeiture of Security Deposit in addition to other claims and penalties in the event of the contractor's failure to fulfil any of the contractual obligations or in the event of termination of contract as per terms and conditions of the contract. BHEL reserves the right to set off the Security Deposit, against any claims of any other contracts with BHEL.

7. **Conditions for acceptance of bank guarantees**

Contractors are advised to obtain Bank Guarantee preferably from any of the following BHEL consortium banks

Sl. No.	Name of Bank	Sl. No.	Name of Bank
1	State Bank of India	11	Punjab National Bank
2	Canara Bank	12	Union Bank of India
3	IDBI Bank Limited	13	Yes Bank Limited
4	ICICI Bank Limited	14	RBL Bank Ltd.
5	HDFC Bank Limited	15	Standard Chartered Bank
6	Axis Bank	16	Indian Overseas Bank
7	IndusInd Bank Limited	17	Kotak Mahindra Bank Limited
8	Bank of Baroda	18	Federal Bank Limited
9	Exim Bank	19	Hongkong and Shanghai Banking Corporation Ltd
10	Indian Bank		

Bank Guarantees from Banks outside BHEL's consortium shall be as below:

The Bank Guarantees of all Public sector banks can be accepted (in addition to consortium banks)

The Bank Guarantees of Co-operative banks shall not be accepted.

Bank Guarantees of other than consortium bank and public sector bank can be accepted subject to an overall exposure limit (at New Delhi) of Rs. 10 crores for banks with net worth of more than Rs. 500 crores as on last balance sheet date and Rs 5 crores for banks with net worth between Rs. 350 to Rs 500 crores (A certificate and copy of latest Balance Sheet to be given by the Bank at the time of submission of Bank Guarantees).

In case of private sector banks, a clause to be incorporated in the text of Bank Guarantee that it can be enforceable by being presented at any branch of the bank.

In case of foreign vendors, the bank guarantees issued by foreign banks may be confirmed by our consortium bank in India.

In case of Bank Guarantees given by Non-Consortium banks (Private sector or Public sector), the Bank Guarantees are to be enforceable in New Delhi or the town/ city in which the sector office is located.

8. RETURN OF SECURITY DEPOSIT:

If the contractor duly performs and completes the work in all respects to the entire satisfaction of BHEL and presents an absolute "No demand certificate", returns properties belonging to BHEL, taken, borrowed or hired by him for carrying out the said works, and furnishes performance bond BG in the prescribed proforma, Security Deposit will be released to the contractor after deducting all costs, expenses and other amounts that are to be paid to BHEL under this contract or other contracts entered into with the contractor.

It may be noted that in no case the Security Deposit shall be refunded/released prior to passing of final bill.

D. Bank Account Details for submission of Security Deposit through electronic fund transfer mode.

NAME OF THE COMPANY	BHARAT HEAVY ELECTRICALS LTD
ADDRESS OF THE COMPANY	TRANSMISSION BUSINESS GROUP, PLOT NO. 25, SECTOR- 16A, NOIDA – 201301 (U.P.)
NAME OF BANK	STATE BANK OF INDIA
NAME OF BANK BRANCH	CAG-II NEW DELHI (17313)
CITY	NEW DELHI
ACCOUNT NUMBER	00000030206227732
ACCOUNT TYPE	CASH CREDIT
IFSC CODE	SBIN0017313

E. Payment terms: Clause No. C.2.0 stands deleted. Now this clause shall be read as below.

(Description of work in this section is made for payment purpose only and the scope is not limited to the activities mentioned below. Please refer technical documents for complete scope of work)

1. No Mobilization Advance shall be paid.

2. For BOQ item Nos. 14-28 (Complete scope of work) (Category-A)

2.1. 10% of the contract item price on the monthly progressive bills on pro rata basis for receipt, material including arranging crane for unloading, maintaining proper records of receipt & storage in Field Quality Plans (FQPs) and as certified by BHEL Engineer.

2.2. 60% of the contract item price on the monthly progressive bills on pro rata basis after arranging necessary calibrated tools/tackles required for erection, submitting calibration reports, qualification/experience certificates of welder/Electrician/other staff, levelling, alignment, tightening and completion of erection including maintaining proper records of installation in FQPs and as certified by BHEL, Engineer.

2.3. 10% of the contract item price on the monthly progressive bills on pro rata basis on arranging calibrated testing equipment, submission of calibration reports, testing of equipment including maintaining proper records of testing in FQPs and as certified by BHEL, Engineer. BOQ items, which are not required to be tested as per FQP, shall be qualified for release of payment on prorata basis after completion of testing of all equipment's of corresponding bay (As per SLD/ layout).

2.4. 10% of the contract item price after completion of satisfactory commissioning and submission of complete records of erection/testing/commissioning /charging protocol as per FQPs for the corresponding bay.

2.5. Last 10% of the contract item price after all test reports as per contract are jointly witnessed and signed by BHEL/customer, "As Built" changes are incorporated in relevant drawings, material reconciliation and substation is handed over to the Owner / Customer. If the contract is for more than one sub-station, then the same will be released after successful handing over of each sub-station. If for any reason, the handing over is delayed for reasons beyond the control of the contractor, in such case this payment will be released against commissioning certificate issued by the BHEL / customer and against submission of final bill of individual substation.

3. For BOQ item Nos. 1- 13: - (Supply in contractor's scope) (Category-B)

- 3.1. 80% of the contract item price on the monthly progressive bills on prorate basis after supply, receipt of the material at site, unloading, proper storage and as certified by site in charge.
- 3.2. 10% of the contract item price on the monthly progressive bills on prorate basis after material erection as certified by BHEL site In-charge on prorate basis after erection.
- 3.3. Last 10% payment shall be released as per 2.5 above of Category-A.

F. Overall Quantity variation-

The individual quantity can vary to any extent or may be deleted for which no compensation will be payable to the contractor and **the rates will remain firm**. Also, the rate of each item remains firm as long as the variation in the total value of work executed under the contract including extra items if any remains within plus/minus 20 percent of the contract value. In case the actual value of executed work including extra work on completion of work becomes less than 70% of the basic/original contract value than the following method shall be adopted.

The actual executed value shall be raised by 7 % (For arriving at the final payment against work executed) subject to the condition that total value of work executed plus increase by 7% as above shall be limited to 70% of the basic/original contract value. The rate quoted shall be firm irrespective of any upward variation in the contract price.

G. OVER RUN COMPENSATION:

Not applicable for this Tender.

H. Clause No. C.30.0 "INCOME TAX/SALES TAX/WORKS TAX/VAT" stands deleted. Now this clause shall be read as below.

1. All taxes (except GST), duties, charges, royalties, cess and any other levies by Central/ State/local authorities for the execution of the contract shall be borne by the contractor and shall not be payable extra. Any increase of the same at any stage during execution of the contract shall be borne by the contractor. Quoted price of the same shall be inclusive of all such requirements.
2. Contractors have to make their own arrangement at their cost for completing the formalities, if required with relevant taxation authorities, for bringing their material, plant and machinery at site for the execution of the contract. Road permits / way bill, if required shall be arranged by the contractor.
3. The Contractor is responsible to furnish documentary evidence towards GST Registration of the State wherein the site is located or any other documents as per GST Act which may be required from time to time. BHEL will not be held to be responsible for any non-compliance of the Contractor in respect of GST laws as framed from time to time.
4. Goods and Service Tax (GST) will be reimbursed to the Contractor subject to the following conditions: -
 - a) Submission of valid GST Compliant Tax Invoice as per the GST Invoice Rules.
 - b) The Invoice raised by the Contractor should indicate the BHEL GST Registration Number.)
 - c) Contractor declaring such invoice in GSTR-1 and the same should be available to BHEL in the form GSTR -2A/ 2B electronically through GST portal
 - d) Confirmation of payment of GST thereon by contractor on GST portal.
5. The GST amount shall get reflected within prescribed time limit in the GSTN for BHEL to avail the input credit. If the GST Credit is reversed/ denied/ delayed to BHEL due to non-receipt/delayed receipt of Services and/or tax invoice or due to expiry of timeline prescribed in GST law or due to any other factor for availing such Input Tax Credit (ITC) or for any other reason arising out of the act directly attributable to the Contractor, GST amount shall be

recoverable from Contractor from any dues payable to the Contractor along with any interest levied/ leviable on BHEL.

6. Statutory variation, if any, on account of GST will be payable by BHEL at actuals on submission of documentary evidence.
7. TDS under Income Tax Act/ GST Act shall be deducted as per applicable rates unless Exemption certificate, if applicable, from the appropriate Authority is furnished to BHEL along with the Invoice.

8. New Taxes & duties (Introduced after tender opening date):

If any new tax or duty is levied by the Central/State Government/Municipality/Local Authority and becomes directly applicable on items specified in the Bill of Quantities, full reimbursement shall be made subject to submission of documentation as per statute.

I. BOCW (TAXES, DUTIES & LEVIES):

BUILDING & OTHER CONSTRUCTION WORKERS (REGULATION OF EMPLOYMENT AND CONDITIONS OF SERVICE) ACT, 1996 (BOCW Act) AND RULES OF 1998 READ WITH BUILDING & OTHER CONSTRUCTION WORKERS CESS Act, 1996 & CESS RULES, 1998.

1. In case any portion of work involves execution through building or construction workers, then compliance to the above titled Acts shall be ensured by the contractor and contractor shall obtain license and deposit the cess under the Act. In the circumstances it may be ensured as under: -
 - 1.1. It shall be the sole responsibility of the contractor in the capacity of employer to forthwith (within a period of 15 days from the award of work) apply for a licence to the Competent Authority under the BOCW Act and obtain proper certificate thereof by specifying the scope of its work. It shall also be responsibility of the contractor to furnish a copy of such certificate of licence / permission to BHEL within a period of one month from the date of award of contract.
 - 1.2. It shall be the sole responsibility of the contractor as employer to ensure compliance of all the statutory obligations under these act and rules including that of payment / deposit of 1% cess on gross payment made for value of work involving building or construction workers engaged by the contractor within a period of one month from the receipt of payment.
 - 1.3. It shall be the responsibility of the sub-contractor to furnish the receipts / challans towards deposit of the cess together with the number, name and other details of beneficiaries (building workers) engaged by the sub-contractor during the preceding month.
 - 1.4. It shall be the absolute responsibility of the sub-contractor to make payment of all statutory payments & compensations to its workers including that is provided under the Workmen's Compensation Act, 1923.
 - 1.5. The contractor shall, however ensure before deposit of any BOCW cess, that customer is not depositing the same in order to avoid excess deposit of cess.
 - 1.6. The contractor shall bear cost of BOCW cess either by way of deposit or through recovery by BHEL in case the same is deposited by the customer.
 - 1.7. In case of failure in above mentioned compliances, BOCW Cess @ 1% as well as applicable penalty as specified in BOCW Act/Rules shall be deducted from the contractor

J. DELAY AND EXTENSION OF TIME:

1. If, in the opinion of the Engineer, the work is delayed:
 - (i) by reason of abnormally bad weather, or
 - (ii) by reason of serious loss or damage by fire, or
 - (iii) by reason of civil commotion, local combination of workmen, strike or lockout, affecting any of the trades employed on the work, or

- (iv) by delay on the part of the agency or tradesman engaged by the BHEL in executing work not forming part of the contract, or
 - (v) By reason of any other cause which in the absolute discretion of the Engineer is beyond the contractor's control, then in any such case, the Engineer (or higher authority) may make fair and reasonable extension in the completion dates of the individual items of work of the contract as whole. Such extension which will be communicated to the contractor by the Engineer in writing shall be final and binding on the contractor. No other claim in this respect for compensation, idle labour or otherwise howsoever is admissible. Upon the happening of any such event causing delay the contractor shall immediately give notice thereof in writing to the Engineer but shall nevertheless use constantly his best endeavour to prevent or make good the delay and shall do all that may reasonably be required to the satisfaction of the Engineer to proceed with the work.
2. In case of delay in completion of work BHEL reserve the right to grant time extension under the following options depending upon the performance of the vendor:
- a) Time extension without levy of LD in case it is found that delay is not attributable to the vendor
 - b) Time extension with deduction of applicable LD in line with Liquidity Damage clause if the delay is solely attributable to the vendor.
 - c) In case facts of delay is not settled, BHEL reserve the right to grant provisional time extension for delay in completion of total work or part thereof and running/ interim payments to the vendor will be released without deduction of LD subject to submission of additional Bank guarantee equivalent to maximum LD amount valid till completion of work under their scope and grant of final time extension.

During provisional time extension period ORC/ PVC shall not be payable to the contractor. The Final Delay analysis shall be prepared on completion of the work. In case of delay is not attributable to contractor as per final delay analysis the ORC/ PVC shall be released along with the final bill without any interest charges attributable to BHEL.

In case of delay attributable to contractor, LD shall be deducted for that period in line with clause "Compensation/ LD/ Penalty for delay in execution" of conditions of contract and balance ORC/ PVC (if any) shall be released along with the final bill without any interest charges attributable to BHEL.

K. LD / PENALTY FOR DELAY IN EXECUTION:

The Clause No. C.5.0 "LD / Penalty for delay in execution" of Conditions of contract for ETC works stands deleted. Now the modified clause shall be read as below:

In case the contractor fails to complete the project within the time specified in the tender specification or any extension thereof subject to force majeure condition, the contractor shall be liable to pay by way of LD/Penalty a sum equal to the half percent of the contract price, per calendar week or part thereof by which the commissioning of the project is delayed, subject to ceiling of 10 % of the contract price. Once the maximum limit of delay is reached (i.e. 20 week of delay) BHEL may consider termination of the contract and forfeit the Security deposit without prejudice to the other remedies under the contract.

Amended/ revised contract value (excluding Extra Works, Supplementary /Additional Items) shall be considered for calculating LD/ penalty.

L. RIGHTS OF BHEL: - The Clause No. B.7.0 "RIGHTS of BHEL" of Conditions of contract for ETC works stands deleted. Now the modified clause shall be read as below: -

BHEL reserves the following rights in respect of this contract during the original contract period or its extensions if any, as per the provisions of the contract, without entitling the contractor for any Compensation

1. To withdraw any portion of work and/or to restrict/alter quantum of work as indicated in the contract during the progress of work and get it done through other agencies to suit BHEL's commitment to its customer or in case BHEL decides to advance the date of completion due to other emergent reasons/ BHEL's obligation to its customer.
In case of inadequate manpower deployed by the contractor, BHEL reserves the right to deploy additional manpower through any other agency for expediting activities in the interest of the project. Supplied manpower shall be put on job by the contractor and payments and other statutory compliances related to manpower shall be the contractor's responsibility. In case of contractor's failure to fulfil his obligations in respect of such manpower, BHEL reserves the right to take necessary action as per contract conditions.

2. Breach of Contract, Remedies and Termination

- 2.1. The following shall amount to breach of contract:
 - I. Non-supply of material/ non-completion of work by the Supplier/Vendor within scheduled delivery/ completion period as per contract or as extended from time to time.
 - II. The Supplier/Vendor fails to perform as per the activity schedule and there are sufficient reasons even before expiry of the delivery/ completion period to justify that supplies shall be inordinately delayed beyond contractual delivery/ completion period.
 - III. The Supplier/Vendor delivers equipment/ material not of the contracted quality.
 - IV. The Supplier/Vendor fails to replace the defective equipment/ material/ component as per guarantee clause.
 - V. Withdrawal from or abandonment of the work by the Supplier/Vendor before completion as per contract.
 - VI. Assignment, transfer, subletting of Contract by the Supplier/Vendor without BHEL's written permission resulting in termination of Contract or part thereof by BHEL.
 - VII. Non-compliance to any contractual condition or any other default attributable to Supplier/Vendor.
 - VIII. Any other reason(s) attributable to Vendor towards failure of performance of contract. In case of breach of contract, BHEL shall have the right to terminate the Purchase Order/ Contract either in whole or in part thereof without any compensation to the Supplier/Vendor.
 - IX. Any of the declarations furnished by the contractor at the time of bidding and/ or entering into the contract for supply are found untruthful and such declarations were of a nature that could have resulted in non-award of contract to the contractor or could expose BHEL and/ or Owner to adverse consequences, financial or otherwise.
 - X. Supplier/Vendor is convicted of any offence involving corrupt business practices, antinational activities or any such offence that compromises the business ethics of BHEL, in violation of the Integrity Pact entered into with BHEL has the potential to harm the overall business of BHEL/ Owner.

Note-Once BHEL considers that a breach of contract has occurred on the part of Supplier/Vendor, BHEL shall notify the Supplier/Vendor by way of notice in this regard. Contractor shall be given an opportunity to rectify the reasons causing the breach of contract within a period of 14 days.

In case the contractor fails to remedy the breach, as mentioned in the notice, to the satisfaction of BHEL, BHEL shall have the right to take recourse to any of the remedial actions available to it under the relevant provisions of contract.

LD against delay in executed work in case of Termination of Contract:

LD against delay in executed work shall be calculated in line with relevant LD clause of GCC, for the delay attributable to contractor. For limiting the maximum value of LD, contract value shall be taken as Executed Value of work till termination of contract.

Method for calculation of "LD against delay in executed work in case of termination of contract" is given below.

- i) Let the time period from scheduled date of start of work till termination of contract excluding the period of Hold (if any) not attributable to contractor = T1
- ii) Let the value of executed work till the time of termination of contract = X
- iii) Let the Total Executable Value of work for which inputs/fronts were made available to contractor and were planned for execution till termination of contract = Y
- iv) Delay in executed work attributable to contractor i.e. $T2 = [1 - (X/Y)] \times T1$
- v) LD shall be calculated in line with LD clause of the Contract for the delay attributable to contractor taking "X" as Contract Value and "T2" as period of delay attributable to contractor.

2.2 Remedies in case of Breach of Contract is established:

- i) Wherein the period as stipulated in the notice issued under clause "BREACH OF CONTRACT, REMEDIES AND TERMINATION" of GCC has expired and Contractor has failed to remedy the breach, BHEL will have the right to terminate the contract on the ground of "Breach of Contract" without any further notice to contractor.
- ii) Upon termination of contract, BHEL shall be entitled to recover an amount equivalent to 10% of the Contract Value for the damages on account of breach of contract committed by the Contractor. This amount shall be recovered by way of encashing the security instruments like performance bank guarantee etc available with BHEL against the said contract. In case the value of the security instruments available is less than 10% of the contract value, the balance amount shall be recovered from other financial remedies (i.e. available bills of the contractor, retention amount, from the money due to the Contractor etc. with BHEL) or the other legal remedies shall be pursued.
- iii) wherever the value of security instruments like performance bank guarantee available with BHEL against the said contract is 10% of the contract value or more, such security instruments to the extent of 10% contract value will be encashed. In case no security instruments are available or the value of the security instruments available is less than 10% of the contract value, the 10% of the contract value or the balance amount, as the case may be, will be recovered in all or any of the following manners:
- iv) In case the amount recovered under sub clause (a) above is not sufficient to fulfil the amount recoverable then; a demand notice to deposit the balance amount within 30 days shall be issued to Contractor.
- v) If Contractor fails to deposit the balance amount within the period as prescribed in demand notice, following action shall be taken for recovery of the balance amount:

- a) from dues available in the form of Bills payable to defaulted Contractor against the same contract.
 - b) If it is not possible to recover the dues available from the same contract or dues are insufficient to meet the recoverable amount, balance amount shall be recovered from any money(s) payable to Contractor under any contract with other Units of BHEL including recovery from security deposits or any other deposit available in the form of security instruments of any kind against Security deposit.
 - c) In-case recoveries are not possible with any of the above available options, Legal action shall be initiated for recovery against defaulted Contractor.
- vi) It is an agreed term of contract that this amount shall be a genuine pre-estimate of damages that BHEL would incur in completion of balance contractual obligation of the contract through any other agency and BHEL will not be required to furnish any other evidence to the Contractor for the purpose of estimation of damages.
 - vii) In addition to the above, imposition of liquidated damages, debarment, termination, de-scoping, short-closure, etc., shall be applied as per provisions of the contract.

Note:

- 1) The defaulting contractor shall not be eligible for participation in any of the future enquiries floated by BHEL to complete the balance work. The defaulting contractor shall mean and include:
 - (a) In case defaulted contractor is the Sole Proprietorship Firm, any Sole Proprietorship Firm owned by same Sole Proprietor.
 - (b) In case defaulted contractor is The Partnership Firm, any firm comprising of same partners/ some of the same partners (but not including any new partner); or sole proprietorship firm owned by any partner(s) as a sole proprietor.
- 2.3.** In case Contractor fails to deploy the resources as per requirement informed by BHEL in writing to expedite the work, BHEL can deploy own/hired/otherwise arranged resources and recover the expenses incurred from the dues payable to contractor. Recoveries shall be actual expenses incurred plus 5% overheads or as defined in TCC.
- 2.4.** To terminate the contract or to restrict the quantum of work and pay for the portion of work executed in case BHEL's contract with their customer are terminated for any reason, whatsoever.
- 2.5.** Whenever any Claim or Claims for payment of any sum of money(s) arises under this or any other contract against the contractor, BHEL shall be entitled to withhold and also have a lien to retain such sum of money(s) in whole or in part from any money(s) payable to contractor and/or security deposits furnished or deducted in cash from the bills of contractor, (if any) under this contract. In the event of the securities or the amounts payable to Contractor, being insufficient to cover BHEL claims, then BHEL shall be entitled to withhold and have a lien to the extent of such claims from any sum or sums found payable or which at any time thereafter may become payable to the contractor under this or any other contract with BHEL.
 - a) Claim or Claims for payment of any sum of money(s) arising from the Contractor under this or any other contract against the contractor, shall mean, the sum of money(s)

actually incurred by BHEL in fulfilling the contractual responsibilities of contractor under the contract, to which he has failed to fulfil plus applicable overheads (@ 5%) along with interest as applicable under the Contract on total amount (i.e. money actually incurred plus overheads)

- b) It is an agreed term of the contract that, the sum or sums of money so withheld or retained under the lien by BHEL will be kept withheld or retained as such by BHEL till the claims arising out of this or any other contract are finally adjudicated wither through Arbitration or a Court of competent jurisdiction as the case may be in accordance with the terms of contract. Intimation given by the BHEL Engineer regarding withholding of such money(s) shall be considered as sufficient and relevant date for all purposes. No Interest shall be payable on such sum(s) of money which becomes due or as the case may be adjudged to be due from BHEL to Contractor, whether under contract or otherwise.
 - c) Where the contractor is a partnership firm, BHEL shall be entitled to withhold and also have a lien to retain towards such claims in whole or in part, from any other money(s) payable to any partner, whether in his individual capacity or otherwise.
 - d) If any money(s) shall, as a result of any claim or application made under the relevant provisions of any Labour Welfare Act and/ or Rules, including but not limited to Contract Labour Regulation & Abolition Act, Minimum Wages Act, Payment of Gratuity Act, BOCW (RE&CS) Act, Provident Fund Act, Employee State Insurance Act, be directed to be paid by the BHEL, such money shall be deemed to be moneys payable to the BHEL by the Contractor.
 - e) Where the Contractor fails to repay to BHEL such moneys along with applicable overheads (@ 5%) and interest, as aforesaid within seven days of being demanded, BHEL shall be entitled to recover the same from Contractor's bills/ Security Deposit or any other money(s) payable to Contractor under this Contract or any other Contract with BHEL.
- 2.6. While every endeavor will be made by BHEL to this end, yet BHEL cannot guarantee uninterrupted work due to conditions beyond its control. The Contractor will not be normally entitled for any compensation/extra payment on this account unless otherwise specified elsewhere in the contract.
- 2.7. BHEL may permit or direct contractor to demobilize and remobilize at a future date as intimated by BHEL in case of following situations for reasons other than Force majeure conditions and not attributable to contractor:
- i) suspension of work(s) at a Project either by BHEL or Customer,
or
 - ii) where work comes to a complete halt or reaches a stage wherein worthwhile works cannot be executed and there is no possibility of commencement of work for a period of not less than three months

In such cases, charges towards demobilization and remobilization shall be as decided by BHEL after successful remobilization by contractor at site, and decision of BHEL shall be final and binding on the contractor. After remobilization, all conditions as per contract shall become applicable. In case Contractor does not remobilize with

adequate resources or does not start the work within the period as intimated, then BHEL reserves the right to terminate the contract and effect remedies under Clause **“Remedies in case of Breach of Contract”** In case of any conflict, BHEL decision in this regard shall be final and binding on the contractor.

- 2.8. In the unforeseen event of inordinate delay in receipt of materials, drawings, fronts etc. due to which inordinate discontinuity of work is anticipated, BHEL on its own or contractor's request at its discretion may consider to short close the contract in any of the following cases:
- a) The balance works (including but not limited to Trial Operation, PG Test etc.) are minor vis a vis the scope of work envisaged as per the contract.
 - b) There has been no significant work in past 6 months OR no significant work is expected in next 6 months (example in Hydro projects or in projects where work has stopped due to reasons beyond the control of BHEL).
 - c) The balance works cannot be done within a reasonable period of time as they are dependent on unit shut down or on other facilities of customer or any other such reasons not attributable to the contractor.

At the point of requesting for short closure, contractor shall establish that he has completed all works possible of completion and he is not able to proceed with the balance works due to constraints beyond his control. In such a case, the estimated value of the unexecuted portion of work (or estimated value of services to be provided for carrying out milestone/stage payments like Trial Operation/PG Test etc.) as decided by BHEL, shall however be reduced from the final contract value.

Note: The Contractor shall not be eligible for any compensation on account of Quantity Variation arising out of short-closure of contract as per clause above.

M. FORCE MAJEURE:

Clause No. B.13.0 (FORCE MAJEURE) of Conditions of Contract for ETC Works has been modified as below:

M.1. "Force Majeure" shall mean circumstance which is:

- a) beyond control of either of the parties to contract,
- b) either of the parties could not reasonably have provided against the event before entering into the contract,
- c) having arisen, either of the parties could not reasonably have avoided or overcome, and
- d) is not substantially attributable to either of the parties

And

Prevents the performance of the contract,

Such circumstances include but shall not be limited to:

- i) War, hostilities, invasion, act of foreign enemies.
- ii) Rebellion, terrorism, revolution, insurrection, military or usurped power, or civil war.
- iii) Riot, commotion or disorder by persons other than the contractor's personnel and other employees of the contractor and sub-contractors.
- iv) Strike or lockout not solely involving the contractor's personnel and other employees of the contractor and sub-contractors.
- v) Encountering munitions of war, explosive materials, ionizing radiation or contamination by radio-activity, except as may be attributable to the contractor's use of such munitions, explosives, radiation or radio- activity.

- vi) Natural catastrophes such as earthquake, tsunami, volcanic activity, hurricane or typhoon, flood, fire, cyclones etc.
 - vii) Epidemic, pandemic etc.
- M.2. The following events are explicitly excluded from Force Majeure and are solely the responsibilities of the non-performing party: a) any strike, work-to-rule action, go-slow or similar labour difficulty (b) late delivery of equipment or material (unless caused by Force Majeure event) and (c) economic hardship.
- M.3. If either party is prevented, hindered or delayed from or in performing any of its obligations under the Contract by an event of Force Majeure, then it shall notify the other in writing of the occurrence of such event and the circumstances thereof within 15 (fifteen) days after the occurrence of such event.
- M.4. The party who has given such notice shall be excused from the performance or punctual performance of its obligations under the Contract for so long as the relevant event of Force Majeure continues and to the extent that such party's performance is prevented, hindered or delayed. The Time for Completion shall be extended by a period of time equal to period of delay caused due to such Force Majeure event.
- M.5. Delay or non-performance by either party hereto caused by the occurrence of any event of Force Majeure shall not
- a) Constitute a default or breach of the Contract.
- Give rise to any claim for damages or additional cost expense occasioned thereby, if and to the extent that such delay or non-performance is caused by the occurrence of an event of Force Majeure
- M.6. BHEL at its discretion may consider short closure of contract after 1 year of imposition of Force Majeure in line with extant guidelines. In any case, Supplier/Vendor cannot consider deemed short-closure after 1 year of imposition of Force Majeure.

N. SETTLEMENT OF DISPUTE

Clause No. B.15.0 (Arbitration) of Conditions of Contract for ETC Works has been modified as below:

If any dispute or difference of any kind whatsoever shall arise between BHEL and the Supplier/Vendor, arising out of the contract for the performance of the work whether during the progress of contract termination, abandonment or breach of the contract, it shall in the first place referred to Designated Engineer for amicable resolution by the parties. Designated Engineer (to be nominated by BHEL for settlement of disputes arising out of the contract) who within 60 days after being requested shall give written notice of his decision to the contractor. Save as hereinafter provided, such decision in respect of every matter so referred shall forthwith be given effect to by the Supplier/Vendor who shall proceed with the work with all due diligence, whether he or BHEL desires to resolve the dispute as hereinafter provided or not.

If after the Designated Engineer has given written notice of this decision to the party and no intention to pursue the dispute has been communicated to him by the affected party within 30 days from the receipt of such notice, the said decision shall become final and binding on the parties. In the event the Supplier/Vendor being dissatisfied with any such decision or if

amicable settlement cannot be reached then all such disputed issues shall be resolved through conciliation in terms of the BHEL Conciliation Scheme 2018 as per Clause "Conciliation" of GCC.

N.1. Conciliation:

Any dispute, difference or controversy of whatever nature howsoever arising under or out of or in relation to this Agreement (including its interpretation) between the Parties, and so notified in writing by either Party to the other Party (the "Dispute") shall, in the first instance, be attempted to be resolved amicably in accordance with the conciliation procedure as per BHEL Conciliation Scheme 2018. The proceedings of Conciliation shall broadly be governed by Part-III of the Arbitration and Conciliation Act 1996 or any statutory modification thereof and as provided in - "Procedure for conduct of conciliation proceedings" (as available in www.bhel.com)).

Note: Ministry of Finance has issued OM reference No. 1/2/24 dated 03.06.2024 regarding "Guidelines for Arbitration and Mediation in Contracts of Domestic Public Procurement. In the said OM it has been recommended that Government departments/ Entities/agencies are to encourage mediation under the Mediation Act. 2023. The said Act has not yet been notified by the Government. Therefore, the clause "**Settlement of Disputes**" shall be modified accordingly as and when the Mediation Act 2023 gets notified.

N.2. ARBITRATION:

N.2.1. Except as provided elsewhere in this Contract, in case Parties are unable to reach amicable settlement (whether by Conciliation to be conducted as provided in Clause "**Conciliation**" herein above or otherwise) in respect of any dispute or difference; arising out of the formation, breach, termination, validity or execution of the Contract; or, the respective rights and liabilities of the Parties; or, in relation to interpretation of any provision of the Contract; or, in any manner touching upon the Contract (hereinafter referred to as the 'Dispute'), then, either Party may, refer the disputes to Arbitral Institution i.e. "**India International Arbitration Centre (IIAC) Delhi**" and such dispute to be adjudicated by Sole Arbitrator appointed in accordance with the Rules of said Arbitral Institution.

N.2.2. A party willing to commence arbitration proceeding shall invoke Arbitration Clause by giving notice to the other party in terms of section 21 of the Arbitration & Conciliation Act, 1996 (hereinafter referred to as the 'Notice') before referring the matter to arbitral institution. The Notice shall be addressed to the **Executive Director, TBG, BHEL, Noida**, executing the Contract and shall contain the particulars of all claims to be referred to arbitration with sufficient detail and shall also indicate the monetary amount of such claim including interest, if any.

N.2.3. After expiry of 30 days from the date of receipt of aforesaid notice, the party invoking the Arbitration shall submit that dispute to the Arbitral Institutions and that dispute shall be adjudicated in accordance with their respective Arbitration Rules. The matter shall be adjudicated by a Sole Arbitrator who shall necessarily be a Retd Judge having considerable experience in commercial matters to be appointed/nominated by the respective institution. The cost/expenses pertaining to the said Arbitration shall also be governed in accordance with the Rules of the respective Arbitral Institution. The decision of the party invoking the Arbitration for reference of dispute to a specific Arbitral institution for adjudication of that dispute shall be final and binding on both the parties and shall not be subject to any change thereafter. The institution once selected at the time of invocation of dispute shall remain unchanged.

N.2.4. The fee and expenses shall be borne by the parties as per the Arbitral Institutional rules.

N.2.5. The Arbitration proceedings shall be in English language and the seat and venue of Arbitration shall be **Delhi**.

- N.2.6. Subject to the above, the provisions of Arbitration & Conciliation Act 1996 and any amendment thereof shall be applicable. All matters relating to this Contract and arising out of invocation of Arbitration clause are subject to the exclusive jurisdiction of the Court(s) situated at **Delhi**.
- N.2.7. Notwithstanding any reference to the Designated Engineer or Conciliation or Arbitration herein, a. the parties shall continue to perform their respective obligations under the Contract unless they otherwise agree. Settlement of Dispute clause cannot be invoked by the Contractor, if the Contract has been mutually closed or 'No Demand Certificate' has been furnished by the Contractor or any Settlement Agreement has been signed between the Employer and the Contractor.
- N.2.8. The Mechanism of resolution of disputes through arbitration shall be available only in the cases where the value of the dispute is less than Rs. 10 Crores.
- N.2.9. In case the disputed amount (Claim, Counter claim including interest is Rs. 10 crores and above, the parties shall be within their rights to take recourse to remedies other than Arbitration, as may be available to them under the applicable laws after prior intimation to the other party. Subject to the aforesaid conditions, provisions of the Arbitration and Conciliation Act, 1996 and any statutory modifications or re-enactment thereof as amended from time to time, shall apply to the arbitration proceedings under this clause.
- N.2.10. In case, multiple arbitrations are invoked (whether sub-judice or arbitral award passed) by any party to under this contract, then the cumulative value of claims (including interest claimed or awarded) in all such arbitrations shall be taken in account while arriving at the total claim in dispute for the subject contract for the purpose of clause N.2.9. Disputes having cumulative value of less than 10 crores shall be resolved through arbitration and any additional dispute shall be adjudicated by the court of competent jurisdiction.

In case of Contract with Public Sector Enterprise (PSE) or a Government Department, the following shall be applicable:

In the event of any dispute or difference relating to the interpretation and application of the provisions of commercial contract(s) between Central Public Sector Enterprises (CPSEs)/ Port Trusts inter se and also between CPSEs and Government Departments/Organizations (excluding disputes concerning Railways, Income Tax, Customs & Excise Departments), such dispute or difference shall be taken up by either party for resolution through AMRCD (Administrative Mechanism for Resolution of CPSEs Disputes) as mentioned in DPE OM No. 05/0003/2019-FTS-10937 dated 14-12-2022 as amended from time to time.

O. FACILITIES PROVIDED TO MSEs: -

Vide office memorandum F.No.21(8)/2011-MA dated 09.11.2016, Office of AS&DC, Ministry of MSME has issued clarification regarding definition of Goods and Services under the Public Procurement Policy of MSEs order-2012, In accordance with the Public Procurement Policy for MSEs order-2012 and OM regarding definition of Goods and Services issued by Ministry of MSME, it is clarified that benefits as envisaged in Public Procurement Policy for MSEs Order 2012 are to be provided in respect of the procurements related to the Goods and Services produced and provided by Micro and Small Enterprises (MSEs) only and **no benefits is to be given in Case of Works Contracts.**

P. CLOSING OF CONTRACTS

The Contract shall be considered completed and closed upon completion of contractual obligations and settlement of Final Bill or completion of Guarantee period whichever is later. Upon closing of Contract, BHEL shall issue a performance/ experience certificate as per standard format, based on specific request of Contractor as per extant BHEL guidelines through the online portal available at <https://siddhi.bhel.in> only.

Q. SUSPENSION OF BUSINESS DEALINGS

BHEL reserves the right to act against Contractors who either fail to perform or Tenderers/Contractor who indulge in malpractices, by suspending business dealings with them in line with BHEL guidelines issued from time to time.

The offers of the bidders who are under suspension as also the offers of the bidders, who engage the services of the banned firms / principal / agents, shall be rejected. The list of banned firms is available on BHEL web site www.bhel.com.

If any bidder / supplier / contractor during pre-tendering / tendering / post tendering / award / execution / post-execution stage indulges in any act, including but not limited to, mal-practices, cheating, bribery, fraud or and other misconduct or formation of cartel so as to influence the bidding process or influence the price or tampers the tendering process or acts or omits in any manner which tantamount to an offence punishable under any provision of the Indian Penal Code, 1860 or any other law in force in India, or does anything which is actionable under the Guidelines for Suspension of Business dealings, action may be taken against such bidder / supplier / contractor as per extant guidelines of the company available on www.bhel.com and / or under applicable legal provisions. Guidelines for suspension of business dealings is available in the webpage:

http://www.bhel.com/vender_registration/vender.php.

R. PERFORMANCE MONITORING:

The Contractors performance shall be continuously monitored during execution of work at site.

In case of contractor's performance is found not satisfactory during the execution of work at site, BHEL may take alternate remedial measures and may not consider the contractor for further tenders, if the contractor performance is not improved in spite of opportunities given by BHEL.

S. MEASUREMENT OF WORK AND MODE OF PAYMENT:

- a) All payments due to the contractors shall be made by e-mode only, unless otherwise found operationally difficult for reasons to be recorded in writing.
- b) For progress running bill payments: - The Contractor shall present detailed measurement sheets in triplicate, duly indicating all relevant details based on technical documents and connected drawings for work done during the month/period under various categories in line with terms of payment as per contract. The basis of arriving at the quantities, weights shall be relevant documents and drawings released by BHEL. These measurement sheets shall be prepared jointly with BHEL Engineers and signed by both the parties.

- c) These measurement sheets will be checked by BHEL Engineer and quantities and percentage eligible for payment under various groups shall be decided by BHEL Engineer. The abstract of quantities and percentage so arrived at based on the terms of payment shall be entered in Measurement Book by BHEL Engineers and signed by both the parties.
- d) These measurement sheets will be checked by BHEL Engineer and quantities and percentage eligible for payment under various groups shall be decided by BHEL Engineer. The abstract of quantities and percentage so arrived at based on the terms of payment shall be entered in Measurement Book and signed by both the parties.
- e) Based on the above quantities, contractor shall prepare the bills, along with statutory documents, in prescribed format and work out the financial value. These will be entered in Measurement Book and signed by both the parties. Payment shall be made by BHEL after effecting the recoveries due from the contractor.
- f) All recoveries due from the contractor for the month/period shall be effected in full from the corresponding running bills unless specific approval from the competent authorities is obtained to the contrary.
- g) Measurement shall be restricted to that portion of work for which it is required to ascertain the financial liability of BHEL under this contract.
- h) The measurement shall be taken jointly by persons duly authorized on the part of BHEL and by the Contractor.
- i) The Contractor shall bear the expenditure involved if any, in making the measurements and testing of materials to be used/ used in the work. The contractor shall, without extra charges, provide all the assistance with appliances and other things necessary for measurement.
- j) If at any time due to any reason whatsoever, it becomes necessary to re-measure the work done in full or in part, the expenses towards such re measurements shall be borne by the contractor unless such re measurements are warranted solely for reasons not attributable to contractor.
- k) Passing of bills covered by such measurements does not amount to acceptance of the completion of the work measured. Any left out work has to be completed, if pointed out at a later date by BHEL.
- l) Final measurement bill shall be prepared in the final bill format prescribed for the purpose based on the certificate issued by BHEL Engineer that entire works as stipulated in tender specification has been completed in all respects to the entire satisfaction of BHEL. Contractor shall give unqualified "No Claim" Certificate. All the tools and tackles loaned to him should be returned in satisfactory condition to BHEL. The abstract of final quantities and financial values shall also be entered in the Measurement Books and signed by both parties to the contract. The Final Bill shall be prepared and paid within a reasonable time after completion of work.

T. NO INTEREST PAYABLE TO CONTRACTOR:

Notwithstanding anything to the contrary contained in any other document comprising in the Contract, no interest shall be payable by BHEL to Contractor on any moneys or balances including but not limited to the Security Deposit, Retention Money, RA Bills or the Final Bill, or any amount withheld and/or appropriated by BHEL etc., which becomes or as the case may be, is adjudged to be due from BHEL to Contractor whether under the Contract or otherwise.

U. PROGRESSIVE PAYMENT/ FINAL PAYMENT:

1. Running Account Bills (RA Bills)

- i) These are for interim payments when the contracts are in progress. The bills for such interim payments are to be prepared by Contractor in prescribed formats (RA Bill forms).
- ii) Payments shall be made according to the extent of work done as per measurements taken up to the end of the calendar month and in line with the terms of payments described in the Tender documents.
- iii) Recoveries on account of electricity, water, statutory deductions etc. are made as per terms of contract.
- iv) Full rates for the work done shall be allowed only if the quantum of work has been done as per the specifications stipulated in the contract. If the work is not executed as per the stipulated specifications, BHEL may ask the contractor to redo the work according to the required specifications, without any extra cost.
- v) The contractor shall submit his monthly RA bills with all the details required by BHEL on specified date every month covering progress of work in all respects and areas for the previous calendar month.
- vi) Mode of payment and measurement of work completed shall be as per relevant clauses of General Conditions of Contract
- vii) Release of payment in each running bill including ORC Bills where ever applicable will be as per stages of progressive pro rata payments.
- viii) The contractor will be eligible for payment of RA Bills within 30 days of submission of running bill complete in all respects with all documents. It is the responsibility of the contractor to make his own arrangements for making timely payments towards labour wages, statutory payments, outstanding dues etc. and other dues in the meanwhile.
All documents like HR Clearance, Quality and Safety Compliances etc. required for processing the RA Bills should be submitted along with RA Bills.
- ix) BHEL shall release payment through Electronic Fund Transfer (EFT)/RTGS. In order to implement this system, Contractor to furnish details pertaining to his Bank Accounts where proceeds will be transferred through BHEL's banker, as per prescribed formats.
- x) **For MSMEs, at the time of submission of first RA bill, the subcontractor has to declare whether it is registered on RXIL portal and wishes to receive the proceeds through RXIL portal throughout the contract duration.**
- xi) Note: BHEL may also choose to release payment by other alternative modes as applicable.

xii) Documents required for RA Bill:

- a) GST Complied Invoice of the work done as per approved BOQ.
- b) Jointly signed Measurement sheet, WAM -6 for RA Bill.
- c) Material Reconciliation statement
- d) Test Report of the material as per FQP
- e) Power of Attorney before submission of Bill.
- f) Validity of Bank Guarantees as applicable under the contract.
- g) HR compliance documents:
 - 1) Labour Payment Certificate, Wages payment sheet
 - 2) Proof of PF, ESI, WC contribution submission
 - 3) Proof of Bonus payment as per Bonus Act if applicable.
- h) Any other documents as per customer requirement/statutory requirement.

Note :

BHEL Site in charge has to certify that all the above required documents have been received and verified and documents sl no. a) to d) duly verified are to be sent to Finance along with RA bills.

2. Final Bill:

Final Bill' is used for final payment on closing of Running Account for works or for single payment after completion of works. 'Final Bill' shall be submitted as per prescribed format after completion of works as per scope, material reconciliation, removal of temporary structures, return of scrap/surplus material of BHEL. BHEL shall settle the final bills after deducting all liabilities of Contractor to BHEL.

2.1. Documents required for Final Bill:

- a) GST Complied Invoice of the work done as per approved BOQ.
- b) Jointly signed Measurement sheet, WAM -7, WAM-10 format (if Applicable).
- c) Valid Bank Guarantees as applicable under the contract.
- d) Labour Payment Certificate (if applicable)
- e) 'No claim' certificate from the contractor.
- f) Deviation statement showing the Executed quantities and quantities as per the contract.
- g) Submission of Test reports as per FQP (if applicable)
- h) Material Reconciliation statement duly approved by BHEL
- i) HR compliance documents:
 - i) Labour Payment Certificate, Wages payment sheet
 - ii) Proof of PF, ESI, WC contribution submission
 - iii) Proof of Bonus payment as per Bonus Act if applicable.
- j) Submission of As Built Drawings (if applicable)
- k) Compliance report from BHEL/Customer for completion of punch points
- l) Final Delay Analysis.
- m) Any other documents as per customer requirement/statutory requirement.

Note :

BHEL Site incharge has to certify that all the above required documents have been received and verified and document sl no. a) to f) duly verified are to be sent to Finance alongwith Completion certificate.

V. LIMITATION ON LIABILITY:

Notwithstanding anything to the contrary in this Contract or LOA or any other mutually agreed document between the parties, the maximum liability, for damages, of the contractor, its servants or agents, shall under no circumstances exceed an amount equal to the Price of the Contract or the Work Order. The Contractor shall not in any case be liable for loss of profit or special, punitive, exemplary, indirect or consequential losses whatsoever. This shall not be applicable on the recoveries made by Customer from BHEL on account of Contractor, any other type of recoveries for workmanship, material, T&P etc. due from the contractor.

W. All other terms and conditions of GCC shall remain unchanged.

INDEMNITY BOND

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

This Indemnity Bond executed by <_____ name of company> having their Registered Office at <_____> in favour of M/s Bharat Heavy Electricals Limited, a Company incorporated under the Companies Act, 1956, having its Registered Office at BHEL House, Siri Fort, Asiad, New Delhi - 110049 through its unit - TBG, 5th Floor, BHEL Sadan, Plot No. 25, Sector-16A, Noida-201301 (UP). (Hereinafter referred to as the Company)

And whereas the Company has entered into a Contract with M/s_____, the executants of this Deed (hereinafter referred to as the Contractor) as its contractor in respect of the work of “_____”.

AND WHEREAS under the provisions of GCC further stipulates that the Contractor shall indemnify the Company against all claims of whatever nature arising during the course of execution of Contract including defects liability period of <_____Months > i.e till <_____>

Now this deed witness that in case the Company is made liable by any Authority including Court to pay any claim or compensation etc. in respect of all labourers or other matters at any stage under or relating to the Contract with the Contractor, the Contractor hereby covenants and agrees with the Company that they shall indemnify and reimburse the Company to the extent of such payments and for any fee, including litigation charges, lawyers' fees, etc, penalty or damages claimed against the Company by reason of the Contractor falling to comply with Central/States Laws, Rules etc, or his failure to comply with Contract (including all expenses and charges incurred by the Company).

The Contractor further indemnifies the Company for the amount which the Company may be liable to pay by way of penalty for not making deductions from the Bills of the Contractor towards such amount and depositing the same in the Government Treasury.

The Contractor further agree that the Company shall be entitled to withhold and adjust the Security Deposit and/or withhold and adjust payment of Bills of Contractor pertaining to this Contract against any payment which the Company has made or is required to make for which the Contractor is liable under the Contract and that such amount can be withheld, adjusted by the Company till satisfactory and final settlement of all pending matters and the Contractor hereby gives his consent for the same.

The Contractor further agrees that the terms of indemnity shall survive the termination or completion of this contract.

The contractor further agrees that the liability of the contractor shall be extended on actual basis notwithstanding the limitations of liability clause, in respect of :

1. breach of terms of contract by the contractor
2. breach of laws by the contractor
3. breach of Intellectual property rights by the contractor
4. breach of confidentiality by the contractor

Nothing contained in this deed, shall be construed as absolving or limiting the liability of the Contractor under said Contract between the Company and the Contractor. That this Indemnity Bond is irrevocable and the condition of the bond is that the Contractor shall duly and punctually comply with the terms and the conditions of this deed and contractual provisions to the satisfaction of the Company.

In witness where of M/s _____ these presents on the day, month and year first, above written at _____ by the hand of its signatory Mr. _____.

Signed for and on behalf of
M/s _____

Witness:

- 1.
- 2.

PROFORMA OF BANK GUARANTEE (in lieu of SECURITY DEPOSIT)

In consideration of Bharat Heavy Electricals Limited (hereinafter referred to as the 'Employer' which expression shall unless repugnant to the context or meaning thereof, include its successors and permitted assigns) incorporated under the Companies Act, 1956 and having its registered office at BHEL House, Siri Fort, New Delhi-110049 through its Unit at BHEL, Transmission Business Group, Noida (name of the Unit) having agreed to exempt _____ (Name of the Vendor / Contractor / Supplier) with its registered office at _____¹ (hereinafter called the said "Contractor" which term includes supplier), from demand under the terms and conditions of the Contract reference No. _____ dated _____² valued at Rs. _____³ (Rupees _____) (hereinafter called the said Contract), of Security Deposit for the due fulfilment by the said Contractor of the terms and conditions contained in the said Contract, on production of a Bank Guarantee for Rs. _____⁴ (Rupees _____ only),

We _____ (indicate the name and address of the Bank) having its Head Office at _____ (address of the head Office) (hereinafter referred to as the Bank), at the request of _____ [Contractor(s)], being the Guarantor under this Guarantee, do hereby irrevocably and unconditionally undertake to forthwith and immediately pay to the Employer, an amount not exceeding Rs. _____ without any demur, immediately on demand from the Employer and without any reservation, protest, and recourse and without the Employer needing to prove or demonstrate reasons for its such demand

Any such demand made on the bank, shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _____.

We undertake to pay to the Employer any money so demanded notwithstanding any dispute or disputes raised by the Contractor(s) in any suit or proceeding pending before any Court or Tribunal or Arbitrator or any other authority, our liability under this present being absolute and unequivocal.

The payment so made by us under this guarantee shall be a valid discharge of our liability for payment hereunder and the Contractor(s) shall have no claim against us for making such payment.

We, further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said Contract and that it shall continue to be enforceable till all the dues of the Employer under or by virtue of the said Contract have been fully paid and its claims satisfied & the Employer certifies that the terms and conditions of the said Contract have been fully and properly carried out by the said contractor(s) or acceptance of the final bill or discharge of this guarantee by the Employer, whichever is earlier. This guarantee shall initially remain in force up to and including _____⁵ and shall be extended from time to time for such period as may be desired by the Employer. Unless a demand or claim under this guarantee is made on us in writing on or before the _____⁶, (3 months more than the present date of validity of Bank Guarantee) we shall be discharged from all the liability under this guarantee thereafter.

We, _____ (indicate the name of the Bank) further agree with the Employer that the Employer shall have the fullest liberty without our consent and without affecting in any manner

our obligations hereunder to vary any of the terms and conditions of the said Contract or to extend time of performance by the said contractor(s) from time to time or to postpone for any time or from time to time any of the powers exercisable by the Employer against the said contractor(s) and to forbear or enforce any of the terms and conditions relating to the said Contract and we shall not be relieved from our liability by any reason of any such variation or extension being granted to the said contractor(s) or for any forbearance, act or omission on the part of the Employer or any indulgence by the Employer to the said contractor(s) or by any such matter or thing whatsoever which under the law relating to sureties would but for this provision have effect of so relieving us.

The Bank also agrees that the Employer at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee that the Employer may have in relation to the Contractor's liabilities.

This Guarantee shall not be determined or affected by liquidation or winding up, dissolution or change of constitution or insolvency of the Contractor but shall in all respects and for all purposes be binding and operative until payment of all money payable to the Employer in terms thereof. This guarantee will not be discharged due to the change in the constitution of the Bank or the Contractor(s).

We,..... BANK lastly undertake not to revoke this guarantee during its currency except with the previous consent of the Employer in writing.

Notwithstanding anything to the contrary contained hereinabove:

- a) The liability of the Bank under this Guarantee shall not exceed.....⁴
- b) This Guarantee shall be valid up to⁵
- c) Unless the Bank is served a written claim or demand on or before⁶ all rights under this guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities under this guarantee irrespective of whether or not the original bank guarantee is returned to the Bank.

We, _____ Bank, have power to issue this Guarantee under law and the undersigned as a duly authorized person has full powers to sign this Guarantee on behalf of the Bank.

Date _____ Day of _____

for _____ (indicate the name of the Bank) _____

(Signature of Authorised signatory)

¹ ADDRESS OF THE VENDOR /CONTRACTOR / SUPPLIER .

² DETAILS ABOUT THE NOTICE OF AWARD/CONTRACT REFERENCE

³ CONTRACT VALUE

⁴ BG AMOUNT IN FIGURES AND WORDS

⁵ VALIDITY DATE (At least 3 months more than completion period)

⁶ DATE OF EXPIRY OF CLAIM PERIOD (At least 3 months more than the present date of validity of BG)

Notes:

- 1 The expiry of claim period shall be at least 3 months more than the validity date. It may be ensured that the same is in line with the agreement/ contract entered with the Vendor.
- 2 The BG should be on Non-Judicial Stamp paper/e-stamp paper of appropriate value as per Stamp Act prevailing in the State(s) where the BG is submitted or is to be acted upon or the rate prevailing in the State where the BG was executed, whichever is higher. The Stamp Paper/e-stamp paper shall be purchased in the name of Vendor/Contractor/Supplier /Bank issuing the guarantee.

3 In Case of Bank Guarantees submitted by Foreign Vendors:

- a. **From Nationalized/Public Sector / Private Sector/ Foreign Banks (BG issued by Branches in India)** can be accepted subject to the condition that the Bank Guarantee should be enforceable in the town/city or at nearest branch where the Unit is located i.e. Demand can be presented at the Branch located in the town/city or at nearest branch where the Unit is located.
- b. **From Foreign Banks (wherein Foreign Vendors intend to provide BG from local branch of the Vendor country's Bank)**
 - b.1 In such cases, in the Tender Enquiry/ Contract itself, it may be clearly specified that Bank Guarantee issued by **any of the Consortium Banks only** will be accepted by BHEL. As such, Foreign Vendor needs to make necessary arrangements for issuance of Counter- Guarantee by Foreign Bank in favour of the Indian Bank's (BHEL's Consortium Bank) branch in India. It is advisable that all charges for issuance of Bank Guarantee/ counter- Guarantee should be borne by the Foreign Vendor. The tender stipulation should clearly specify these requirements.
 - b.2 In case, Foreign Vendors intend to provide BG from Overseas Branch of our Consortium Bank (e.g. if a BG is to be issued by SBI Frankfurt), the same is acceptable. However, the procedure at sl.no. b.1 will required to be followed.

BHARAT HEAVY ELECTRICALS LIMITED
DIVISION.....
Running Account Bill
(Para 4.3.1 of Works Accounts Manual)

Name of the Contractor

Name of the Work:

Sanctioned Estimate:

Code No.:

Contract Agreement No.:

Dated:

Division:

Date of written order to
commence the Work:Date of commencement
of work:Due date of completion as per
agreementDate of approval of Competent Authority for time extension as applicable
(copy to be enclosed).

Departmental Bill No.

Date:

Sub-Division:

Period of work covered in this
bill:**I. ACCOUNT OF WORK EXECUTED**

Adhoc payment for work not previously measured **			Item No. of work	Description of work	Quantity as per agreement	Quantity executed upto date	Rate	Unit	Payment on the basis of actual measurement upto date	Quantity executed since last RA bill	Payment on the basis of actual measurement since last running account bill	Remarks
Total as per last running account bill	Since last running account bill	Total upto date										
1	2	3	4	5	6	7	8	9	10	11	12	13

** 1. Whenever payment is made on adhoc basis without actual measurements the amount in whole rupees should be entered in columns 1 to 3 only and not in columns 7 to 12

2. Whenever there is an entry in column 12 on the basis of actual measurement, the whole of the amount previously paid without detailed measurement should be adjusted by a minus entry in column 2 equivalent to the amount shown in column 1, so that the total upto date in column 3 may become nil.

Total value of work done upto date

(A)

Deduct value of work shown on the last Running Account Bill

(B)

Net value of work done since last Running Account Bill

(C)

Rupees (in words) Only

Note :

Wherever adhoc payments to contractors against running bills are made in accordance with the extant Works Policy, the amount so paid shall be adjusted.

II. MEMORANDUM OF PAYMENTS

		I	II
1.	Total value of work actually measured as per Account No. I, Column 10	(A) -----	-----
2.	Total upto date adhoc payment for work covered by approximate or plan measurements as per Account I, Col. 3	(B) -----	-----
4.	Total upto date payments [(A)+(B)]	(C) -----	-----
	Total amount of payments already made as per entry (D) of last Running Account Bill No. dated forwarded to the Accounts Department on	(D) -----	-----
6.	Balance [(C) - (D)]		-----
7.	Payments now to be made:	-----	
	a) by cash / cheque	-----	
	b) by deduction for value of materials supplied by BHEL vide Annexure A attached	-----	
	c) by deduction for hire of tools and plant vide Annexure B attached	-----	
	d) by deduction for other charges vide Annexure C attached	-----	
	e) by deduction on account of security deposit	-----	
	f) by deduction on account of Income Tax	-----	-----

Note :	Amounts relating to items 4 to 6 above should be entered in column II and those relating to item 7 in column I. The amount shown against item 6 and the total of item 7 should agree with each other.
--------	---

III. CERTIFICATE OF THE ENGINEER IN CHARGE

1	The measurements on which the entries in column 7 to 12 of Part I of this Bill (Account of work executed) are based were made by ----- and are reorded at pages - ----- of Measurement Book No. ----- (Name and Designation)
2	Certified that the methods of measurement are correct and the work has been carried out in accordance with the terms and conditions, schedules, specifications and drawings etc. forming part of the contract agreement, subject to deviations included in the deviation statement (Annexure D)
3	Certified that in addition to and quite apart from the quantities of work actually executed as shown in column 10 of Part I, some work has actually been done in connection with several items and the value of the such work is, in no case, less than the adhoc payments as per column 3 of Part I, made or proposed to be made, for the convenience of the contractor in anticipation of, and subject to the results of, detailed measurement which will be made as soon as possible.
4	Certified that measurements by Engineer-in-charge and test check of prescribed percentage of measurements by the concerned superior authorities has been carried out.
5	Certified that there are no pending recoveries from the contractor on account of chargeable items (e.g T&P, consumables, material, etc.) issued either by BHEL or by the customer and other recoveries like power, water, quarter, tax liability towards declaration forms etc.
6	Certified that with regard to the free issues, regular reconciliation is being done, completed upto ----- and there are no recoveries pending from the contractor on account of such issues in excess of requirement for execution of work as per contract.
7	Certified that there is no pending recovery for damaged material issued free of cost.
8	Certified that the contractor has fulfilled all the requirements as per contract with reference to statutory obligations (PF, ESI, Minimum Wages, BOCW, Insurance etc.), support services such as service manpower, computer system , T&P etc

Signature of Contractor

Signature of Engineer in Charge

Designation:

Date:

Date:

IV. CERTIFICATE OF THE SENIOR ENGINEER

1	Certified that the measurements have been check measured to the prescribed extent by at site and also by the undersigned and the relevant entries have been initialed in the Measurement Book. (vide pages) (Name and Designation)
2	Certified that all the measurements recorded in the measurement book have been correctly billed for
3	Certified that all recoverable amounts in respect of materials tools and plant etc. and other charges have been correctly made vide annexures A to C attached.

Certified for payment * of Rs. (Rupees only)

* Here specify the net amount payable.

Date:

Signature of Senior Engineer

V. ENTRIES TO BE MADE IN THE FINANCE DEPARTMENT

Accounts Bill No. dated

Entered in Journal Book vide entry No. dated

Passed for Rs.

Less Deductions Rs.

Net amount payable Rs.

(Rupees only)

Payable to Shri / M/s by cheque / cash

Entered in Contractors ledger No. Page

Estimate No :

Debit

Credit

(Gross amount)

(Deductions)

Name of Work :

Account code head

Total

Code No.:

ALLOCATION

Assistant

Date:

Accountant

Date:

Finance Executive

Date:

ANNEXURE A

Statement showing details of materials issued to the contractor Shri / M/S..... in respect of Contract Agreement / Work Order No.....Dated..... and covered by the agreement

Sl.No.	Stores Issue Voucher No. and date	Issue voucher No. and date allotted by stores to the SIV	Description of material issued issued to the contractor	Quantity issued		Quantity actually incorporated in the work	Balance quantity with contractor		If recoverable from the contractor				
				Free	Chargeable		Free	Chargeable	Rate at which recoverable	Amount recoverable	Amount recovered upto previous bill	Balance now recovered	Remarks
1	2	3	4	5	6	7	8	9	10	11	12	13	14

Certified that (balance quantity of free issue material as per Col. 8 above) is physically available with the Contractor.

Total

Signature of Contractor
Date:

Signature of Engineer in Charge
Date:

Signature of Senior Engineer
Date:

ANNEXURE B

Statement showing tools and plant issued to the contractor Shri/M/s..... in respect of Contract Agreement No.....Dated.....

Sl. No.	Description of Tools and Plant issued	Period for which issued	Rate at which recovery is to be made	Amount recoverable	Amount recovered upto previous bill	Balance Recovered now	Remarks
1	2	3	4	5	6	7	8

TOTAL

Signature of Contractor
Date :

Signature of Engineer in Charge
Date :

Signature of Senior Engineer
Date:

ANNEXURE C

Form WAM 6 (Contd.)

Statement showing details of other recoveries to be made from the contractor Shri/M/s-----in respect of contract Agreement No.Dated

S. No.	Particulars	Unit	Quantity	Rate	Amount recoverable	Amount recovered up to previous bill	Amount now recovered	Remarks
1	2	3	4	5	6	7	8	9
1	Water charges							
2	Electricity charges							
3	Seignorage charges							
4	Medical charges							
5	Cost of empty gunny bags and empty containers not returned							
6								
7								
8								

TOTAL

--	--	--

Signature of Contractor

Date :

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date:

ANNEXURE D
DEVIATION STATEMENT

Name of the Contractor:

Contract Agreement No

Name of Work:

Date:

S. No.	Description of Item	Unit	Quantity as per agreement	Quantity as executed	Quantity further anticipated	Total quantity anticipated on completion	Rate as per agreement	Rate as executed	Amount as per agreement	Amount as executed	Amount further anticipated	Total Amount anticipated on completion	Difference		Reason for deviation with authority, if any
													Excess	Savings	

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----

Signature of Engineer in Charge

Date :

Signature of Senior Engineer

Date :

BHARAT HEAVY ELECTRICALS LIMITED
DIVISION.....
.....And Final Bill
(Para 4.3.2 of Works Accounts Manual)

Departmental Bill No:
Date:
Name of the Contractor:
Name of the Work:

Division:
Date of Written order to commence the work:

Sub-Division:

Sanctioned Estimate:
Contract Agreement/ Work Order No:
Date of actual completion of the work:

Date of commencement of the Work:
Dated:

Due date of completion as per Agreement:

I. ACCOUNT OF WORK EXECUTED

Adhoc payment for work not previously measured **			Item no. of the agreement / work order	Description of work	Quantity as per agreement	Quantity executed upto date	Rate	Unit	Payment on the basis of actual measurement upto date	Quantity since last running account bill	Payment on the basis of actual measurement since last running account bill	Remarks
Total as per last running account bill	Since last running account bill	Total upto date										

1	2	3	4	5	6	7	8	9	10	11	12	13
---	---	---	---	---	---	---	---	---	----	----	----	----

** Whenever there is an entry in column 12 on the basis of actual measurement, the whole of the amount previously paid without detailed measurement should be adjusted by a minus entry in column 2 equivalent to the amount shown in column 1, so that the total upto date in column 3 may become nil.

Total value of work done upto date	(A)	-----
Deduct value of work shown on the last Running Account Bill	(B)	-----
Net value of work done since last Running Account Bill	(C)	-----
Rupees (in words) Only		

II. MEMORANDUM OF PAYMENTS

1	Total value of work actually measured as per Account No. I column 10	(A)	-----
2	Deduct amount of payments already made as per last running account bill No. dated	(B)	-----
3	Payment now to be made [(A) - (B)]	(C)	-----
4	Deduct amounts recoverable from the contractor on account of :		
	a) Materials supplied by BHEL vide Annexure A attached		-----
	b) Hire of tools and plant vide Annexure B attached		-----
	c) Other charges vide Annexure C attached		-----
	d) Income Tax		-----
	Total Deductions		-----
5	Balance		-----
6	Refunds of Security Deposit		-----
7	Net amount to be paid to the contractor		-----
	Net value Rupees (in words)		Only

I/ We hereby certify that I/We have performed the work as per the terms and conditions of Contract Agreement/Work Order No.....Dated.....for which payment is claimed as above and that I/We have no further claim under this agreement/work order.

Signature of the Contractor

Date:

III CERTIFICATE OF THE ENGINEER IN CHARGE

1. The measurements on which the entries in columns 7 to 11 of Part I of this bill (Account of work executed) are based were made by.....
are recorded at pages.....of measurement book No..... (Name and Designation)
2. A statement showing the quantities of stores issued to the contractor (whether free or on recovery basis) and their disposal is attached.

Date:

Signature of Engineer incharge

Designation:

IV CERTIFICATE OF THE SENIOR ENGINEER

1. Certified that I have personally inspected the work and that the work has been physically completed on the due date in accordance with the terms and conditions, schedules, specifications and drawings etc., forming part of the contract agreement, subject to the deviations noted in Deviation Statement (Annexure D).
2. Certified that the measurements have been check measured to the prescribed extent by..... and by the undersigned at site and the relevant entries have been initiated in the measurement book (vide pages.....) (Name and Designation)
3. Certified that the methods of measurement are correct.
4. Certified that the measurements have been technically checked with reference to contract drawings, deviations etc.
5. Certified that the measurements recorded in the measurement book have been correctly billed for at the contract rates or approved rates.
6. Certified that all recoverable amounts in respect of stores, tools and plant, water, electricity charges etc. have been correctly made vide Annexures A to C and that there are no other demands outstanding against the contractor on this contract.
7. Certified that the issues of all stores as per statement attached (whether charged to the contractor or direct to the work) have been technically checked and represent fair and reasonable issues for the items of work executed vide Annexure E.
8. Certified that all statutory requirements including PF, ESI, Minimum wages, Insurance, GST, BOCW, etc. are complied with by the Contractor. This should be duly backed by the relevant documents.

Certified for payment of * Rs.....(Rupees.....only).

*Here specify the net amount payable

Signature of Senior Engineer

Date

IV ENTRIES TO BE MADE IN THE FINANCE DEPARTMENT

Passed for.....Rs.....
Less Deductions.....Rs.....
Net Amount Payable.....Rs.....
(Rupees.....only)

Account code head	Debit	Credit
	(Gross Amount)	(Deductions)
TOTAL		

Assistant

Accountant

Finance Executive

Date:

Date:

Date:

ANNEXURE A
Part I

Statement showing details of materials issued to the contractor Shri / M/S.....in respect of Contract Agreement / Work Order No.....Dated..... and covered by the agreement.

Sl.No.	Stores Issue Voucher No. and date	Issue voucher No. and date allotted by stores to the SIV	Description of material issued issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Whether recoverable from the contractor or supplied free	If recoverable from the Contractor				
							Rate at which recoverable	Amount recoverable	Amount recovered upto previous bill	Balance now recovered	Remarks
1	2	3	4	5	6	7	8	9	10	11	12
Total											

Signature of Contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

ANNEXURE A
Part II

Statement showing details of materials issued to the contractor Shri / M/S..... in respect of Contract Agreement / Work Order No.....Dated..... and not covered by the agreement

Sl.No	Stores Issue Voucher No. and Date	Issue Voucher No. and date allotted by stores to the SIV	Description of material issued to the contractor	Quantity issued	Quantity actually incorporated in the work	Issue Rate	Amount recoverable	Amount recovered upto previous bill	Balance now recovered	Remarks
1	2	3	4	5	6	7	8	9	10	11

TOTAL

Add Departmental Charges

Add GST (Wherever applicable)

GRAND TOTAL

Signature of Contractor

Signature of Engineer-in-Charge

Signature of Senior Engineer

Date:

Date:

Date:

Note: Cost of materials recovered in this bill should be shown against item 4 (a) of the memorandum of payments. The amounts of taxes and departmental charges recovered in this bill should be incorporated in Annexure C.

ANNEXURE B

Form WAM 7 (Contd.)

Statement showing tools and plant issued to the contractor Shri /M/S.....in respect of contract Agreement / Work Order No.....Dated.....

Sl.No.	Description of Tools and Plant Issued	Period for which issued	Rate at which recovery is to be made	Amount recoverable	Amount recovered upto previous bill	Balance now recovered	Remarks
1	2	3	4	5	6	7	8

TOTAL

--	--	--

Signature of Contractor

Signature of Engineer-in-Charge

Signature of Senior Engineer

Date

Date

Date

ANNEXURE C

Statement showing details of other recoveries to be made from the contractor Shri/M/s..... In respect of Contract Agreement / Work Order No.....Dated.....

Sl.No.	Particulars	Unit	Quantity	Rate	Amount recoverable	Amount recovered upto previous bill	Amount now recovered	Remarks
1	2	3	4	5	6	7	8	9
1	Water charges							
2	Electricity charges							
3	Medical charges							
4	Cost of empty gunny bags and empty containers not returned							
5								
6								
7								

TOTAL

--	--	--

Signature of Contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date

Date

Date

**ANNEXURE D
DEVIATION STATEMENT**

Name of the Contractor:
Name of the Work:

Contract Agreement/Work Order No.
Date:

SL. No.	Description of Item	Unit	Quantity as per agreement	Quantity as executed	Rate as per agreement	Rate as executed	Amount as per agreement	Amount as executed	Difference		Reason for the deviation with authority, if any
									Excess	Savings	
1	2	3	4	5	6	7	8	9	10	11	12

Signature of Engineer in Charge
Date:

Signature of Senior Engineer
Date:

ANNEXURE E

Statement showing the consumption of materials issued to the contractor Shri/M/s..... in respect of Contract Agreement / Work Order No.....Dated.....
Name of the Work:

ON RECOVERY BASIS

SL. No.	Description of material	Unit	Quantity actually issued	Quantity actually incorporated in the work	Balance	Particulars of disposal of balance	Quantity to be issued as per approved data for work actually done	Variation in consumption (difference between colum 5 & 8)		Rate chargeable for excess/short consumption, if any	Amount Recoverable for excess/short consumption, including materials not returned, if any	Remarks
								More	Less			
1	Cement											
2	Bricks											
3	Wood											
4	Asbestos Sheet											
5	Iron Material											
6												
7												

Signature of Contractor

Signature of Engineer in Charge

Signature of Senior Engineer

Date:

Date:

Date:

Note

- The quantities shown in columns 4 and 5 above should tally with those shown in columns 5 & 6 respectively of Annexure A (Part I and II)
- Data statement of theoretical consumption should be attached in support of quantity specified in column 8.

ANNEXURE F

Form WAM 7 (Contd.)

Statement showing details of materials issued to the contractor Shri/M/s..... in respect of Contract Agreement / Work Order No.....dated.....

Name of the Work:

FREE OF COST

Sl.No	Stores Issue Voucher No.	Description of material	Unit	Quantity issued	Quantity required as per data	Quantity consumed in the work	Balance (if any)	Nature of disposal for the balance	Rate chargeable for material not returned	Amount recoverable for material not returned	Remarks
1	2	3	4	5	6	7	8	9	10	11	12

Signature of Contractor
Date:

Signature of Engineer in Charge
Date:

Signature of Senior Engineer
Date:

ANNEXURE G
QUESTIONNAIRE TO BE ANSWERED BY THE ENGINEER IN CHARGE AND SENIOR ENGINEER
(Correct particulars and answers to be recorded)

1. Name of the Work:
2. Name of the Contractor:
3. Date of commencement of the Work:
4. Contract agreement /Work Order No. and date:
5. Reference to the supplementary Agreement No. if any:
6. Whether administrative approval and technical sanction has been accorded by the competent authority? If so, cite reference?
7. Whether sanction of the competent authority and financial concurrence of the Finance Department for award of the work has been accorded? If so, cite reference.
8. Whether the work has been completed in time? If not whether penalty has been levied or sanction of the competent authority for extension of time granted and communicated to the Finance Department with reasons for grant of extension? (Due and actual date of completion of the work and reference to letter No. and date granting the extension of time should be given).
9. (a) Whether the rates allowed in the bill have been checked with the contract agreement?
 (b) Whether the rates for extra/supplemental items have been approved by the competent authority and the sanction communicated to the Finance Department together with rate analysis? If so, cite reference
10. Whether deviations have been approved by the competent authority? If yes, give reference to the approval; if not, give reasons.
11. Whether the rates of recovery of stores issued to the contractor which are not provided for in the contract agreement have been settled in consultation with Finance?
12. Whether discrepancies pointed out by the Finance department in the stores statement have been reconciled and accepted by the Finance Department?
13. Whether materials issued to the contractor in excess of the theoretical requirements have been returned to the Stores department and the No. and date of such returned stores vouchers have been shown in Stores statement? If not, whether the cost of such excess materials has been recovered at the prescribed rate? Whether consumption statements in respect of materials chargeable to the work have been attached to the bill?
14. Whether consumption of materials shown has been technically checked by Senior Engineer?
15. Whether materials issued and used in the work is not less than that required for consumption in work according to our specifications? If consumption is less, whether necessary recovery has been made in the bill?
16. Whether measurements have been checked by the Engineer and Senior Engineer to the extent required and certificates of check recorded in the measurement books?
17. Whether contractor has signed the bill and the measurement books without reservations? If not, whether reasons have been intimated to the Finance Department?
18. Whether arithmetical calculations have been checked and certificate recorded in the measurement books by a person other than the one who calculated initially?
19. Whether any work was done at the risk and cost of the contractor and whether such cost has been recovered from him? Give particulars.
20. Whether all advance payments on running accounts have been recovered?
21. Whether all the recoveries due for services given to the contractor like rent of accommodation, water charges, electricity charges have been recovered and whether payments made by the company on behalf of the contractor have been adjusted?
22. Whether the files containing abstracts from measurement books/standard measurement books have been completed/updated?
23. Whether hire charges for tools & plant have been recovered and the statement of hire charges with full details attached?
24. Whether the certificate of workmanship and completion of work according to specifications, drawings etc. is recorded by Engineer Incharge/Senior Engineer and whether recoveries have been made for defective works, if any?
25. Whether all corrections in the bill/measurement books etc. have been neatly made and attested and there are no overwriting?
26. Whether final measurements have been taken as soon as possible after completion of the work and the certificate of completion issued? If not, whether reasons for delay have been recorded and communicated to finance department?
27. In respect of quantities reduced in the final bill as compared to the running payment, whether adequate reasons have been recorded and communicated to finance department?
28. Whether the expenditure has been classified correctly according to heads of account recorded in the sanctioned estimate?
29. Whether the work has been completed within the estimated cost? If not, what is the percentage of excess over the sanctioned estimate/ administrative approval? In case the excess is beyond the competency of the Senior Engineer, what action has been taken for obtaining the approval of the authority competent to sanction the excess?
30. (a) If the contractor has furnished bank guarantee in lieu of cash security deposit towards proper execution of works and guarantee against defects during the maintenance period, whether the period of currency of the bank guarantee covers the entire maintenance period?
 (b) If not whether security deposit has been proposed to be recovered from the final bill?
31. Whether all the previous audit objections raised on running account bills have been settled? If so, cite references.

Signature of Engineer in Charge
 Date:

Signature of Senior Engineer
 Date:

**ANNEXURE TO MODEL CONCILIATION CLAUSE FOR CONDUCT OF
CONCILIATION UNDER THE BHEL CONCILIATION SCHEME, 2018**

BRIEF PROCEDURE FOR CONDUCT OF CONCILIATION PROCEEDINGS

1. The proceedings of Conciliation shall broadly be governed by Part-III of the Arbitration and Conciliation Act 1996 or any statutory modification thereof and as provided herein:
2. The party desirous of resorting to Conciliation shall send an invitation/notice in writing to the other party to conciliate specifying all points of Disputes with details of the amount claimed. The party concerned shall not raise any new issue thereafter. Parties shall also not claim any interest on claims/counter-claims from the date of notice invoking Conciliation till the conclusion of the Conciliation proceedings.
3. The party receiving the invitation/notice for Conciliation shall within 30 days of receipt of the notice of Conciliation intimate its consent for Conciliation along with its counter-claims, if any.
4. The Conciliation in a matter involving claim or counter-claim (whichever is higher) up to Rs 5 crores shall be carried out by sole Conciliator nominated by BHEL while in a matter involving claim or counter-claim (whichever is higher) of more than Rs 5 crores Conciliation shall be carried out by 3 Conciliators nominated by BHEL.
5. The Parties shall be represented by only their duly authorized in-house executives/officers and neither Party shall be represented by a Lawyer.
6. The first meeting of the IEC shall be convened by the IEC by sending appropriate communication/notice to both the parties as soon as possible but not later than 30 days from the date of his/their appointment. The hearings in the Conciliation proceeding shall ordinarily be concluded within two (2) months and, in exceptional cases where parties have expressed willingness to settle the matter or there exists possibility of settlement in the matter, the proceedings may be extended by the IEC by a maximum of further 2 months with the consent of the Parties subject to cogent reasons being recorded in writing.
7. The IEC shall thereafter formulate recommendations for settlement of the Disputes supported by reasons at the earliest but in any case within

15 days from the date of conclusion of the last hearing. The recommendations so formulated along with the reasons shall be furnished by the IEC to both the Parties at the earliest but in any case within 1 month from the date of conclusion of the last hearing.

8. Response/modifications/suggestions of the Parties on the recommendations of the IEC are to be submitted to the IEC within time limit stipulated by the IEC but not more than 15 days from the date of receipt of the recommendations from the IEC.
9. In the event, upon consideration, further review of the recommendations is considered necessary, whether by BHEL or by the other Party, then, the matter can be remitted back to the IEC with request to reconsider the same in light of the issues projected by either/both the Parties and to submit its recommendations thereon within the following 15 days from the date of remitting of the case by either of the Parties.
10. Upon the recommendations by the Parties, with or without modifications, as considered necessary, the IEC shall be called upon to draw up the Draft Settlement Agreement in terms of the recommendations.
11. When a consensus can be arrived at between the parties only in regard to any one or some of the issues referred for Conciliation the draft Settlement Agreement shall be accordingly formulated in regard to the said Issue(s), and the said Settlement Agreement, if signed, by the parties, shall be valid only for the said issues. As regards the balance issues not settled, the parties may seek to resolve them further as per terms and conditions provided in the contract.
12. In case no settlement can be reached between the parties, the IEC shall by a written declaration, pronounce that the Conciliation between the parties has failed and is accordingly terminated.
13. Unless the Conciliation proceedings are terminated in terms of para 22 (b), (c) & (d) herein below, the IEC shall forward his/its recommendations as to possible terms of settlement within one (1) month from the date of last hearing. The date of first hearing of Conciliation shall be the starting date for calculating the period of 2 months.

14. In case of 3 members IEC, 2 members of IEC present will constitute a valid quorum for IEC and meeting can take place to proceed in the matter after seeking consent from the member who is not available. If necessary, videoconferencing may be arranged for facilitating participation of the members. However, the IEC recommendations will be signed by all members. Where there is more than one (1) Conciliator, as a general rule they shall act jointly. In the event of differences between the Members of IEC, the decision/recommendations of the majority of the Members of IEC shall prevail and be construed as the recommendation of the IEC.
15. The Draft Settlement Agreement prepared by the IEC in terms of the consensus arrived at during the Conciliation proceedings between the Parties shall be given by the IEC to both the parties for putting up for approval of their respective Competent Authority.
16. Before submitting the draft settlement agreement to BHEL's Competent Authority viz. the Board Level Committee on Alternative Dispute Resolution (BLCADR) for approval, concurrence of the other party's Competent Authority to the draft settlement agreement shall be obtained by the other party and informed to BHEL within 15 days of receipt of the final draft settlement agreement by it. Upon approval by the Competent Authority, the Settlement Agreement would thereafter be signed by the authorized representatives of both the Parties and authenticated by the members of the IEC.
17. In case the Draft Settlement Agreement is rejected by the Competent Authority of BHEL or the other Party, the Conciliation proceedings would stand terminated.
18. A Settlement Agreement shall contain a statement to the effect that each of the person(s) signing thereto (i) is fully authorized by the respective Party(ies) he/she represents, (ii) has fully understood the contents of the same and (iii) is signing on the same out of complete freewill and consent, without any pressure, undue influence.
19. The Settlement Agreement shall thereafter have the same legal status and effect as an arbitration award on agreed terms on the substance of the dispute rendered by an arbitral tribunal passed under section 30 of the Arbitration and Conciliation Act, 1996.
20. Acceptance of the Draft Settlement Agreement/recommendations of the Conciliator and/or signing of the Settlement Agreement by BHEL shall

however, be subject to withdrawal/closure of any arbitral and/or judicial proceedings initiated by the concerned Party in regard to such settled issues.

21. Unless otherwise provided for in the agreement, contract or the Memorandum of Understanding, as the case may be, in the event of likelihood of prolonged absence of the Conciliator or any member of IEC, for any reason/incapacity, the Competent Authority/Head of Unit/Division/Region/Business Group of BHEL may substitute the Conciliator or such member at any stage of the proceedings. Upon appointment of the substitute Conciliator(s), such reconstituted IEC may, with the consent of the Parties, proceed with further Conciliation into the matter either de-novo or from the stage already reached by the previous IEC before the substitution.
22. The proceedings of Conciliation under this Scheme may be terminated as follows:
- On the date of signing of the Settlement agreement by the Parties; or,
 - By a written declaration of the IEC, after consultation with the parties, to the effect that further efforts at conciliation are no longer justified, on the date of the declaration; or,
 - By a written declaration of the Parties addressed to the IEC to the effect that the Conciliation proceedings are terminated, on the date of the declaration; or,
 - By a written declaration of a Party to the other Party and the IEC, if appointed, to the effect that the Conciliation proceedings are terminated, on the date of the declaration.
 - On rejection of the Draft Settlement Agreement by the Competent Authority of BHEL or the other Party.
23. The Conciliator(s) shall be entitled to following fees and facilities:

Sl No	Particulars	Amount
1	Sitting fees	Each Member shall be paid a Lump Sum fee of Rs 75,000/- for the whole case payable in terms of paragraph No. 27 herein below.
2	Towards drafting of settlement agreement	In cases involving claim and/or counter-claim of up to Rs 5crores. Rs 50,000/- (Sole Conciliator)

Sl No	Particulars	Amount
		<p>In cases involving claim and/or counter-claim of exceeding Rs 5 crores but less than Rs 10 crores. Rs 75,000 (per Conciliator)</p> <p>In cases involving claim and/or counter-claim of more than Rs 10 crores. Rs 1,00,000/- (per Conciliator)</p> <p>Note: The aforesaid fees for the drafting of the Settlement Agreement shall be paid on Signing of the Settlement Agreement after approval of the Competent Authority or Rejection of the proposed Settlement Agreement by the Competent Authority of BHEL.</p>
3	Secretarial expenses	<p>Rs 10,000/- (one time) for the whole case for Conciliation by a Sole Member IEC.</p> <p>Where Conciliation is by multi member Conciliators –Rs 30,000/- (one time)- to be paid to the IEC</p>
4	<p>Travel and transportation and stay at outstation</p> <p>i) Retired Senior Officials of other Public Sector Undertakings (pay scale wise equivalent to or more than E-8 level of BHEL)</p>	As per entitlement of the equivalent officer (pay scale wise) in BHEL.
	Others	As per the extant entitlement of whole time Functional Directors in BHEL.

Sl No	Particulars	Amount
		Ordinarily, the IEC Member(s) would be entitled to travel by air Economy Class.
5	Venue for meeting	Unless otherwise agreed in the agreement, contract or the Memorandum of Understanding, as the case may be, the venue/seat of proceedings shall be the location of the concerned Unit / Division / Region / Business Group of BHEL. Without prejudice to the seat/venue of the Conciliation being at the location of concerned BHEL Unit / Division / Region / Business Group, the IEC after consulting the Parties may decide to hold the proceedings at any other place/venue to facilitate the proceedings. Unless, Parties agree to conduct Conciliation at BHEL premises, the venue is to be arranged by either Party alternately.

24. The parties will bear their own costs including cost of presenting their cases/evidence/witness(es)/expert(s) on their behalf. The parties agree to rely upon documentary evidence in support of their claims and not to bring any oral evidence in IEC proceedings.
25. If any witness(es) or expert(s) is/are, with the consent of the parties, called upon to appear at the instance of the IEC in connection with the matter, then, the costs towards such witness(es)/expert(s) shall be determined by the IEC with the consent of the Parties and the cost so determined shall be borne equally by the Parties.
26. The other expenditures/costs in connection with the Conciliation proceedings as well as the IEC's fees and expenses shall be shared by the Parties equally.
27. Out of the lump sum fees of Rs 75,000/- for Sitting Fees, 50% shall be payable after the first meeting of the IEC and the remaining 50% of the Sitting Fees shall be payable only after termination of the conciliation proceedings in terms of para 22 hereinabove.

28. The travelling, transportation and stay at outstation shall be arranged by concerned Unit as per entitlements as per Serial No. 3 of the Table at para 23 above, and in case such arrangements are not made by the BHEL Unit, the same shall be reimbursed to the IEC on actuals limited to their entitlement as per Serial No. 4 of the Table at Para 23 above against supporting documents. The IEC Member(s) shall submit necessary invoice for claiming the fees/reimbursements.
29. The Parties shall keep confidential all matters relating to the conciliation proceedings. Confidentiality shall extend also to the settlement agreement, except where its disclosure is necessary for purposes of its implementation and enforcement or as required by or under a law or as per directions of a Court/Governmental authority/regulatory body, as the case may be.
30. The Parties shall not rely upon or introduce as evidence in any further arbitral or judicial proceedings, whether or not such proceedings relate to the Disputes that is the subject of the Conciliation proceedings:
- a. Views expressed or suggestions made by the other party in respect of a possible settlement of the Disputes;
 - b. admissions made by the other party in the course of the Conciliator proceedings;
 - c. proposals made by the Conciliator;
 - d. The fact that the other Party had indicated his willingness to accept a proposal for settlement made by the Conciliator.
31. The Parties shall not present the Conciliator(s) as witness in any Alternative Dispute Resolution or Judicial proceedings in respect of a Disputes that is/was the subject of that particular Conciliation proceeding.
32. None of the Conciliators shall act as an arbitrator or as a representative or counsel of a Party in any arbitral or judicial proceeding in respect of a Disputes that is/was the subject of that particular Conciliation proceeding.
33. The Parties shall not initiate, during the Conciliation proceedings, any arbitral or judicial proceedings in respect of a Disputes that is the subject matter of the Conciliation proceedings except that a Party may initiate arbitral or judicial proceedings where, in his opinion, such proceedings are necessary for preserving his rights including for preventing expiry of period of limitation. Unless terminated as per the provisions of this Scheme, the Conciliation proceedings shall continue

notwithstanding the commencement of the arbitral or judicial proceedings and the arbitral or judicial proceedings shall be primarily for the purpose of preserving rights including preventing expiry of period of limitation.

34. The official language of Conciliation proceedings under this Scheme shall be English unless the Parties agree to some other language.

Format 2 to BHEL Conciliation Scheme, 2018

**FORMAT FOR SEEKING CONSENT FOR REFERRING THE DISPUTES TO
CONCILIATION THROUGH IEC**

To,

M/s. (Stakeholder's name)

Sub: Resolution of the Disputes through conciliation by Independent Expert Committee (IEC).

Ref: Contract No/MoU/Agreement/LOI/LOA& date _____.

Sir,

With reference to above referred Contract/MoU/Agreement/LOI/LOA, you have raised certain Disputes/claims. Vide your letter dated_____ you have requested BHEL to refer the Disputes/claims to IEC for Conciliation.

We are enclosing herewith Format (3) for giving consent and the terms and conditions of BHEL Conciliation Scheme, 2018 governing conciliation through IEC. You are requested to give your unconditional consent to the said terms and conditions of the Scheme by returning the same duly sealed and signed on each page. On receipt of your consent, matter will be put to the Competent Authority for consideration and decision.

Please note that BHEL has also certain claims against you (if applicable). BHEL reserves its right to agree or not to agree conciliation of the said disputes through BHEL and this letter is being issued without prejudice to BHEL's rights and contentions available under the contract and law.

Yours faithfully,

Representative of BHEL

Format 3 to BHEL Conciliation Scheme, 2018
FORMAT FOR GIVING CONSENT BY
CONTRACTOR/VENDOR/CUSTOMER/COLLABORATOR/CONSORTIUM PARTNERS FOR REFERRING THE DISPUTES TO CONCILIATION THROUGH IEC

To,

BHEL

.....

Sub: Resolution of Disputes through Conciliation by Independent Expert Committee (IEC).

Ref: Contract/MoU/Agreement/LOI/LOA No & date ____

With reference to above referred contract, our following bills/invoices/claims submitted to BHEL are still unpaid giving rise to Disputes:

SL. no.	Claim Description	Bill submitted to BHEL (no. and date)	Amount of the bill/claim	Amount received from BHEL	Outstanding Amount

Accordingly we request you to kindly refer the Disputes in respect of above claims to IEC for Conciliation.

We hereby agree and give our unconditional consent to the terms and conditions of BHEL Conciliation Scheme, 2018 governing conciliation through IEC. We have signed the same on each page and enclosed it for your consideration.

Yours faithfully,

(Signature with stamp)

Authorized Representative of Contractor

Name, with designation

Date

Format 5 to BHEL Conciliation Scheme, 2018
STATEMENT OF CLAIMS/COUNTER CLAIMS TO BE SUBMITTED TO
THE IEC BY BOTH THE PARTIES

1. Chronology of the Disputes
2. Brief of the Contract/MoU/Agreement/LOI/LOA
3. Brief history of the Disputes:
4. Issues:
5. Details of Claim(s)/Counter Claim(s):

Sl. No.	Description of claim(s)/Counter Claim	Amount (in INR)Or currency applicable in the contract	Relevant contract clause

6. Basis/Ground of claim(s)/counter claim(s) (along with relevant clause of contract)

Note– *The Statement of Claims/Counter Claims may ideally be restricted to maximum limit of 20 pages. Relevant documents may be compiled and submitted along with the statement of Claims/Counter Claims. The statement of Claims/Counter Claims is to be submitted to all IEC members and to the other party by post as well as by email.*

BILL OF QUANTITY CUM PRICE SCHEDULE (ANNEXURE-I)						
Name of Project: 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT						
Name of Work: SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND						
Tender Spec. No. : TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 DATE: 22.01.2025						
Sl. No.	Category	Description of Item	Quantity	UOM	Unit Rate	Amount
1	B	Supply of steel tubular pole (9 mtrs Long 410 SP33)	58	No.	₹ 14,595.56	₹ 8,46,542.48
2	B	Supply of overhead ACSR rabbit conductor	6600	Mtrs	₹ 38.418	₹ 2,53,558.80
3	B	Supply of GI wire (8 SWG/ 4mm)	144	Kg	₹ 83.08	₹ 11,963.52
4	B	Supply of galvanised stay set complete with 19/ 20 mm dia X 1.8 metres long stay rod, anchor plate of size 45 cm X 45 cm X 7.5 mm thick, thimble, stay clamps, turn buckle (20 mm X 600 mm), 7/ 4.00 mm dia GI stay wire and 11 KV strain insulator etc complete in all respect.	29	Set	₹ 3,490.78	₹ 1,01,232.62
5	B	Supply of single length of channel (MS 75 mmX40 mmX6 mm-7.14 Kg/ metre) pole top bracket/ cross arm for single 11 KV over head line conductors complete with 50 mmX 6 mm MS flat clamps, bolts, nuts and washers including drilling holes for insulator pins, bolts, nuts etc and painting with primer and finish paint as required	1	Set	₹ 274.31	₹ 274.31
6	B	Supply of single length of channel (MS 75 mmX40 mmX6 mm-7.14 Kg/ metre) V-shape cross arm for two 11 KV over head line conductors complete with 50 mmX 6mm MS flat clamps, bolts and nuts including drilling holes for insulator pins, bolts, nuts and washers etc and painting with primer and finish paint as required	1	Set	₹ 888.25	₹ 888.25
7	B	Supply of 11 KV pin insulator with galvanised insulator fittings, complete with large steel head galvanised pin, nuts, washers etc as required	81	Set	₹ 242.06	₹ 19,606.86
8	B	Supply of 11 KV disc insulator with galvanised insulator fittings, ball and socket type and complete with galvanised strain clamps, bolts, nuts, washers etc as required	156	Set	₹ 578.74	₹ 90,283.44
9	B	Supply of earthing/ grounding with GI earth plate 600 mmX600 mmX6 mm thick including accessories	29	Set	₹ 12,219.38	₹ 3,54,362.02

BILL OF QUANTITY CUM PRICE SCHEDULE (ANNEXURE-I)						
Name of Project: 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT						
Name of Work: SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND						
Tender Spec. No. : TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 DATE: 22.01.2025						
Sl. No.	Category	Description of Item	Quantity	UOM	Unit Rate	Amount
10	B	Supply of two lengths of channel (MS 75 mmX40 mmX6 mm-7.14 Kg per metre) single/ double/ four pole cross arm for double three wire 11 KV over head line conductors complete with through bolts and nuts for clamping to the poles, 50 mmX 6mm MS flats welded on one side to the channel iron and with bolts and nuts on the other side for tying the cross arms together, including drilling holes for insulator pins/ fittings, bolts, nuts and washers etc (as per applicable drawing) and painting with primer and finish paint as required	58	Set	₹ 4,008.05	₹ 2,32,466.90
11	B	Supply of a cross bracing work for 11 KV overhead single/ double/ four pole structure having four members fabricated out of 50 mmX50 mmX6 mm MS angle to form a rectangle of minimum size 1400 mm widthX 2500 mm height complete with 50 mmX6 mm flat MS clamps, bolts & nuts including drilling holes and painting with primer and finish paint as required	33	Set	₹ 4,847.85	₹ 1,59,979.05
12	B	Supply of 11 KV, 400 A, TPMO (triple pole manually operated) switch with supporting MS channel, angle iron for cable support and GI pipe complete in all respect	2	Set	₹ 14,055.25	₹ 28,110.50
13	B	Supply of 120 mm dia DWC HDPE pipe ISI marked along with all accessories like socket, bend, coupler etc. confirming to IS 14930 Pat-II complete with fitting, complete in all respect	150	Mtrs	₹ 413.16	₹ 61,974.00
14	A	Erection of steel tubular or rail pole strut in cement concrete 1:3:6 (1 cement: 3 coarse sand : 6 graded stone aggregate 40 mm nominal size) foundation including excavation and refilling and securing with holding clamps, bolts, nuts etc. as required.	58	Each	₹ 6,611.05	₹ 3,83,440.90
15	A	Erection of over head line with ACSR rabbit conductor on pole including binding etc complete in all respect	6600	Mtrs	₹ 32.276	₹ 2,13,021.60
16	A	Erection of GI wire (8 SWG/ 4mm) including binding etc complete in all respect.	144	Kg	₹ 38.95	₹ 5,608.80

BILL OF QUANTITY CUM PRICE SCHEDULE (ANNEXURE-I)**Name of Project: 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT****Name of Work: SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND****Tender Spec. No. : TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 DATE: 22.01.2025**

Sl. No.	Category	Description of Item	Quantity	UOM	Unit Rate	Amount
17	A	Erection of galvanised stay set complete with 19/ 20 mm dia X 1.8 metres long stay rod, anchor plate of size 45 cm X 45 cm X 7.5 mm thick, thimble, stay clamps, turn buckle (20 mm X 600 mm), 7/ 4.00 mm dia GI stay wire and 11 KV strain insulator etc in cement concrete 1:3:6 (1 cement:3 coarse sand: 6 graded stone aggregate 40 mm nominal size) foundation including excavation and refilling etc. as required. Unit service price is included in respective supply BOQ Item No. (4.a).	29	Set	₹ 0.00	₹ 0.00
18	A	Erection of pole top single wire / V-shape two wire MS channel iron, cross arm on steel tubular pole for 11 KV as required	1	Set	₹ 468.11	₹ 468.11
19	A	Erection of 11 KV pin insulator with galvanised insulator fittings, complete with large steel head galvanised pin, nuts, washers etc as required. Unit service price is included in respective supply BOQ Item No. (6.a).	81	Set	₹ 0.00	₹ 0.00
20	A	Erection of 11 KV disc insulator with galvanised insulator fittings, ball and socket type and complete with galvanised strain clamps, bolts, nuts, washers etc as required. Unit service price is included in respective supply BOQ Item No. (7.a).	156	Set	₹ 0.00	₹ 0.00
21	A	Installation of earthing/ grounding with GI earth plate 600 mmX600 mmX6 mm thick including accessories and providing masonry enclosure with cover plate having locking arrangement and watering pipe of 2.7 metre long etc. with charcoal/ coke and salt as required. Unit service price is included in respective supply BOQ Item No. (8.a).	29	Set	₹ 0.00	₹ 0.00
22	A	Erection of single/ double/ four pole 3 wire cross arm on steel tubular pole for 11 KV overhead line as required	13	Set	₹ 781.85	₹ 10,164.05
23	A	Erection of a cross bracing work for 11 KV overhead single/ double/ four pole structure having four members fabricated out of 50 mmX50 mmX6 mm MS angle to form a rectangle of minimum size 1400 mm widthX 2500 mm height complete with 50 mmX6 mm flat MS clamps, bolts & nuts including drilling holes and painting with primer and finish paint as required. Unit service price is included in respective supply BOQ Item No. (10.a).	33	Set	₹ 0.00	₹ 0.00

BILL OF QUANTITY CUM PRICE SCHEDULE (ANNEXURE-I)						
Name of Project: 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT						
Name of Work: SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND						
Tender Spec. No. : TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 DATE: 22.01.2025						
Sl. No.	Category	Description of Item	Quantity	UOM	Unit Rate	Amount
24	A	Erection, testing and commissioning of 11 KV, 400 A, TPMO (triple pole manually operated) switch with supporting MS channel, angle iron for cable support and GI pipe complete in all respect. Unit service price is included in respective supply BOQ Item No. (11.a).	2	Set	₹ 0.00	₹ 0.00
25	A	Laying of 120 mm dia DWC HDPE pipe ISI marked along with all accessories like socket, bend, coupler etc. confirming to IS 14930 Pat-II complete with fitting and cutting, jointing etc. direct in ground (75 cm below ground level) including excavation and refilling the trench but excluding sand cushioning and protective covering etc., complete as required. Unit service price is included in respective supply BOQ Item No. (12.a).	150	Mtrs	₹ 0.00	₹ 0.00
26	A	Painting of single/ double/ four pole with two coat aluminum paint over red oxide primer including supply of materials, complete in all respect	58	Nos.	₹ 338.68	₹ 19,643.44
27	A	Fixing of danger board fabricated 10 gauge MS sheet of size 250 mmX200 mm, as per IE Rule including supply of materials, complete in all respect	27	Nos.	₹ 219.12	₹ 5,916.24
28	A	Providing and laying in position cement concrete of 1:3:6 specified grade but excluding the cost of centering and shuttering - All work up to plinth level complete in all respect (2.0 mx2.0 mx1.5 m) for 4 pole structure.	6	Cum	₹ 5,930.38	₹ 35,582.28
Total Amount (Exclgd. GST)						₹ 28,35,088.00

Tender Inviting Authority: BHEL, TBG- SubContracting Department, Sector 16A Noida, UP


Name of Work: SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND.

Contract No: TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 DATE: 22.01.2025

Name of the Bidder/ Bidding Firm / Company :						
<div>PRICE SCHEDULE</div> <div>(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevent columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)</div>						
NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	Estimated Rate in Rs. P	TOTAL AMOUNT Without Taxes in Rs. P	TOTAL AMOUNT In Words
1	2	4	5	6	53	55
1	Total amount as per rates in BOQ (as per Annexure-I) for "SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN UTTARAKHAND". - Excluding GST	1.000	Nos	2835088.00	2835088.00	INR Twenty Eight Lakh Thirty Five Thousand &Eighty Eight Only
Total in Figures					2835088.00	INR Twenty Eight Lakh Thirty Five Thousand &Eighty Eight Only
Quoted Rate in Figures			Select		0.000	INR Zero Only
Quoted Rate in Words		INR Zero Only				



BHARAT HEAVY ELECTRICALS LIMITED
TRANSMISSION BUSINESS ENGINEERING MANAGEMENT
NOIDA

DOCUMENT NO.	TB-382-316-015	REV 00	Prepared	Checked	Approved
TYPE OF DOC.	TECHNICAL SPECIFICATION	NAME	BY	DK	VK
Title: 11kV distribution line with accessories		SIGN			
		DATE	05.08.2024	05.08.2024	05.08.2024
		GROUP	TBEM		
		WO No.	84008A		

CUSTOMER THDC India Limited, Rishikesh, Uttarakhand

PROJECT Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Contents

Section No.	Description	No of Pages
	Cover page	
Section-1	Scope, Project specific technical requirements & Bill of Quantities	10
Section-2	Equipment Specification under scope of supplies/ service	11
Section-3	Project details and general technical requirements (For all equipment under the Project)	21
Section-4	Annexures Annexure-A: Compliance Certificate to Technical Specification Annexure-B: Deviation(s) to Technical Specification Annexure-C: Guaranteed Technical Particulars Annexure-D: Technical Checklist	5

Remarks: Bidder to note that any data and details provided along with offer as Guaranteed Technical Particulars or Datasheet shall not be reviewed during technical evaluation/ scrutiny, hence compliance of guaranteed technical particulars in line with technical specification shall be bidder's responsibility.

Rev. No.	Date	Altered	Checked	Approved	
Distribution				To	
				Copies	

COPYRIGHT & CONFIDENTIAL
The information in this document is the property of BHARAT HEAVY ELECTRICALS LIMITED
This must not be used directly or indirectly in anyway detrimental to the interest of the company.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

Contents

SECTION 1:	2
SCOPE, PROJECT SPECIFIC TECHNICAL REQUIREMENTS & BILL OF QUANTITIES	2
1. Scope	2
2. Codes & Standards.....	4
3. General Technical Requirements	4
4. Specific Technical Requirements	5
5. Bill of Quantities	5
6. Drawings / Documents required for Engineering Manufacturing Clearance	6
7. Type Testing	6
8. Quality Plan.....	7
9. Inspection & Testing.....	7
10. Packing and Dispatch.....	7
11. List of Documents/ Drawings.....	8

SECTION 1:

SCOPE, PROJECT SPECIFIC TECHNICAL REQUIREMENTS & BILL OF QUANTITIES

1. Scope

1. This technical specification covers the requirement of detailed survey, spotting of location of poles, supply and erection of tubular poles in single pole support / double pole / four pole arrangement with complete 11KV line material such as 11kV disc insulators with fittings, 11KV pin insulators with pins, cross arms, pole top bracket, straight X arms, earthing material, guy sets with complete material with nuts & bolts washers, pole clamps and all other required lines accessories and belts & bracings, ACSR conductor, earth wire, fixing of insulator strings, stringing of conductor and earth wire, fixing of stays and testing and commissioning of erected 11KV lines etc. complete in line with specification
2. The technical specification also covers the requirements of design, manufacture, inspection including third party inspection and testing at manufacturer's works before supply, proper packing and delivery to project site, transportation, providing services for installation, testing, carrying out of pre-commissioning checks and final commissioning of 11kV distribution line with accessories.
3. This section covers the specific technical requirements including quantities of 11kV distribution line with accessories. This constitutes minimum technical parameters for the above system as specified by the customer Section-2 (Equipment Specification under scope of Supplies) of this specification. The offered system shall also comply with the Section-3 (Project Details and General technical requirements for all equipment under the Project) of this specification.
4. It is not the intent to specify herein all the details of design, manufacturing and supply etc. The equipment and system shall conform in all respects to high standards of design, engineering and workmanship and shall be capable of performing the required duties in a manner acceptable to BHEL/ THDCIL, who will interpret the meaning of drawings and specifications and shall be entitled to reject supply, which in his judgment is not in full accordance herewith.
5. 11KV distribution lines shall be running almost through plain profile of 6m wide road connecting 400kV pothead yard to 11kV THDC sub-station, which may require road crossing once/ twice, as per site conditions.
6. The technical specification comprises of following sections:

Section-1	:	Scope, Project Specific Technical Requirements & Bill of Quantities
Section-2	:	Equipment Specification under scope of Supplies
Section-3	:	Project Details & General Technical Requirements (For All Equipment under the Project)

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

Section-4	:	Annexures
		Annexure A- Compliance Certificate
		Annexure B- Schedule of Technical Deviation/ Change request
		Annexure C- Guaranteed Technical Particulars
		Annexure D- Technical Checklist

7. The following order of priority/ precedence shall be followed. In case of conflict between requirements specified in various documents, the more stringent one shall be followed. BHEL/ THDCIL concurrence shall, however, be obtained before taking a final decision in such matters.
- i). Statutory Regulations
In particular, the latest version of the following statutory regulations, as applicable, shall be followed for system,
- o Indian Electricity Act
 - o CEA regulations
 - o Requirements of other statutory bodies as applicable, e.g. CEA.
- ii). Section-1
iii). Section-2
iv). Section-3
v). Codes & Standards
8. Bidder shall furnish list of conflicts/ ambiguities/ deviations, if any, along with their technical offer and also furnish the basis that is considered for submitting technical offer. BHEL/ THDCIL will resolve listed conflicts prior to award. In case of ambiguity, bidder shall inform BHEL/ THDCIL of their interpretation. In case bidder fails to convey the same prior to award, BHEL/ THDCIL decision on interpretation shall be considered final if need arises during the execution. No additional cost or extra time on account of conflicts/ ambiguities/ deviations shall be admissible.
9. In general, no deviation from the requirements specified in various clauses of this specification shall be allowed and hence, a certificate to this effect shall have to be furnished along with the offer (Annexure-A), however bidder shall furnish list of conflicts/ ambiguities/ deviations (Annexure-B), if any. Any conflicts/ ambiguities/ deviations mentioned elsewhere in technical offer shall not be reviewed.

The system is required for the following project:

Name of the Customer	:	THDC India Limited, Rishikesh, Uttarakhand
Name of Main Contractor	:	Bharat Heavy Electricals Limited
Name of the Project	:	Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

10. The commercial terms and conditions for supplies and services shall be as per notice inviting tender/ enquiry. Quoting the tender, shall deemed to have understood and complied all the technical requirements in line with technical specifications, drawings etc. in complete.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

2. Codes & Standards

1. 11kV distribution line with accessories shall comply with the requirements of latest revisions of following standards issued by BIS (Bureau of Indian Standards)/ equivalent international standards but not limited to the following,

IS 2713 (Pt-I & III): 1980	The tubular steel poles
IS:731-1971	Porcelain Insulators for Overhead Power Lines with a Nominal Voltage greater than 1000V
IS 2486 (Pt.I): 1971 & IS 2486 (Pt.II): 1974	Metal Fittings of Insulators for Overhead Power Lines With Nominal Voltage greater than 1000 V – Specification
IS 3043: 1987	Code of practice for earthing
IS 2141:1979, IS 4826: 1979 & IS 6594: 1974	Hot dip galvanized stay strand
IS 5561	Electric power connectors
IS 2551: 1982	Danger notice plates
IS 9511: 1980	Earth knobs for neutral conductors
IS 280: 1978 & IS 7887: 1975	Mild Steel Wire for general engineering purposes
IS 398 (Pt. I & II): 1996	Aluminium Conductors for Overhead Transmission Purposes

2. In case of imported equipment, standards of the country of origin shall be applicable if these standards are equivalent or stringent than the applicable Indian standards.
3. The equipment shall also conform to the provisions of Indian Electricity rules and other statutory regulations currently in force in the country.
4. In case Indian standards are not available for any equipment, standards issued by IEC/ BSNDE/ IEEE/ NEMA or equivalent agency shall be applicable.

3. General Technical Requirements

The general technical requirements for 11kV distribution line with accessories shall be in line with following details,

1. Schedule
 - Bidder shall submit detailed bar chart for engineering approval, site installation, testing and commissioning activities.
 - Bidder shall submit list of consumables with shelf life of fewer than two years, if applicable and same shall be dispatched just before the erection and only after specific clearance from BHEL/ THDCIL.
 - In addition to this, packing of materials shall be suitable for long term storage without any deterioration in quality and performance (min. 2 years, if required).
2. Open/ closed store
 - Store area shall be allocated by BHEL, however, bidder shall construct open/ closed

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

store including office, if required as per their requirement.

- Unloading of materials at site, storage in open/ closed store as per requirement shall be in bidder's scope including watch & ward. However, in case materials are taken out from store, it shall be bidder's responsibility to arrange the watch and ward round the clock.
3. Site Staff including site supervisor
 - Site staff including site supervisor and other workers along with tools & tackles, tools & plant is deemed to be included in bidder's scope including loading, unloading and transportation.
 4. Construction supply
 - For construction requirements, the necessary power supply at site shall be provided by BHEL at one point only on chargeable/ free basis, subject to customer provision with BHEL.
 5. Site Testing & Commissioning
 - Bidder shall depute its qualified testing engineer at site for successful testing and commissioning of 11kV distribution system.

4. Specific Technical Requirements

1. The specific technical requirements for 11kV distribution line with accessories is as follows,

Sl. No.	Description	Technical Parameters
1.	Maximum ambient temperature	40 deg C
2.	Minimum ambient temperature	-7 deg C
3.	Design ambient temperature	40 deg C
4.	Technical Parameters	
a.	Nominal voltage class	11 kVrms
b.	Maximum System voltage	12 kV
c.	Basic Insulation Level (Impulse)	75 kVpeak
d.	Power frequency withstand voltage	28 kV
e.	System	2x 3-phase, 4 wire system

2. Refer drawings **11kV Distribution Line- Preliminary Route Survey Drawing** for basic layout and arrangement of 11kV double distribution line.

5. Bill of Quantities

1. The schedule for quantities for 11kV Distribution Line is as per **Annexure- BOQ for 11kV Distribution Line**, which includes schedule of supply as well as service also. BHEL reserves the right for overall contract value variation up to $\pm 20\%$ due to any reason at the same unit rates, terms & conditions during execution of contract.
2. Bidder may please to note that the final & exact quantities for 11kV distribution line shall be

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

decided after joint route survey during site visit and making precise measurements at contract stage. Hence, manufacturing lengths shall be determined with consultation & approval with BHEL/ THDCIL.

3. The Payment of final & exact quantities for supply shall be as per approved quantities by BHEL/ THDCIL.
4. The bidder must fill up all the details required for offered item/s. Instead of indicating “refer drawing, or as per IS/IEC”, the exact value/s must be filled in.

6. Drawings / Documents required for Engineering Manufacturing Clearance

1. Drawings/ documents detailed as detailed below shall be used for providing technical clearance for manufacturing of 11kV distribution line & its accessories which may be used for engineering delay analysis, if applicable for respective group.

1.	11kV distribution line- Route survey report for finalization of quantities of 11kV distribution line
2.	11kV distribution line- GA Drawing, GTP & BOM for main supply items
3.	11kV distribution line- Foundation Drawing and other details for site work
4.	11kV distribution line- Type test report for applicable items
5.	11kV distribution line- Quality Assurance Plan

2. The technical clearance for manufacturing shall be issued item wise subject to condition of approval of drawing/ documents in category-I (approval without any comments)/ category-II (approval with comments) from BHEL/ THDCIL. In case drawing/ document are not duly stamped in category-1/ category-2 by THDCIL, BHEL stamp/ confirmation shall be treated final to proceed further.
3. Date of Submission of drawings/ documents shall be counted only from the date of submission of reasonably correct drawings/ documents.
4. The successful bidder shall have to extend all possible support such as timely submission/ re-submission of drawings, visit to end customer to facilitate documents approval without any commercial implications to BHEL. Acceptance of bidder's documents shall be subject to end customer/ THDCIL approval.

7. Type Testing

1. Bidder shall ensure that materials of 11kV distribution line being procured shall have valid type test certificates as specified in IS/ IEC standards (amended up to date) at any independent laboratory/ NABL accredited laboratory for applicable items. The validity of type test reports shall be per CEA guidelines, amended time to time.
2. If the tests conducted are not to the satisfaction of BHEL/ THDCIL, the tests shall be re-conducted by bidder without any commercial implication to BHEL.
3. Further, in case, any of type tests have not been conducted on the offered design or there has been a change in the design after the type tests, the requisite tests shall be conducted by bidder on the offered design by bidder without any commercial implication to BHEL.

8. Quality Plan

1. The successful bidder shall submit Quality Assurance Plan for 11kV distribution line for applicable materials with in-process inspection methods, tests, records, etc. for BHEL/THDCIL approval. Customer hold points will also be included in the plan, which shall be mutually agreed by BHEL/THDCIL
2. In case bidder has reference Quality Assurance Plan agreed with BHEL/THDCIL, same shall be submitted for specific project to BHEL/THDCIL approval. There shall be no commercial implication to BHEL/THDCIL on account of Quality Plan approval.
3. Superior quality control system shall be adopted to assure high product quality. Raw materials of the best commercial grade quality and high reliability shall be used in the manufacture items/ materials of LT Switchgear and its accessories. All materials shall be procured, manufactured, inspected and tested by vendor/ sub-vendor as per approved quality plan. The supplier shall perform all tests necessary to ensure that the material and workmanship conform to the relevant standards and comply with the requirements of the specification. Charges for all tests shall be deemed to be included in bidder's scope.

9. Inspection & Testing

1. 11kV distribution line & its accessories shall be subject to inspection by BHEL/THDCIL or authorized representative at bidder/ manufacturers' works. Hence, Bidder shall furnish all necessary information concerning the supply to BHEL/THDCIL.
2. The inspector shall have free access to the manufacturer's/ supplier's works for the purpose of inspecting the process of manufacture in all its stages and he will have the power to reject any material, which appears to him to be of unsuitable description or of unsatisfactory quality.
3. Bidder shall give at least 2 weeks' advance notice to BHEL/THDCIL, regarding the date of testing to enable him or his representative to witness the tests. All the tests must be done as per the approved QAP.

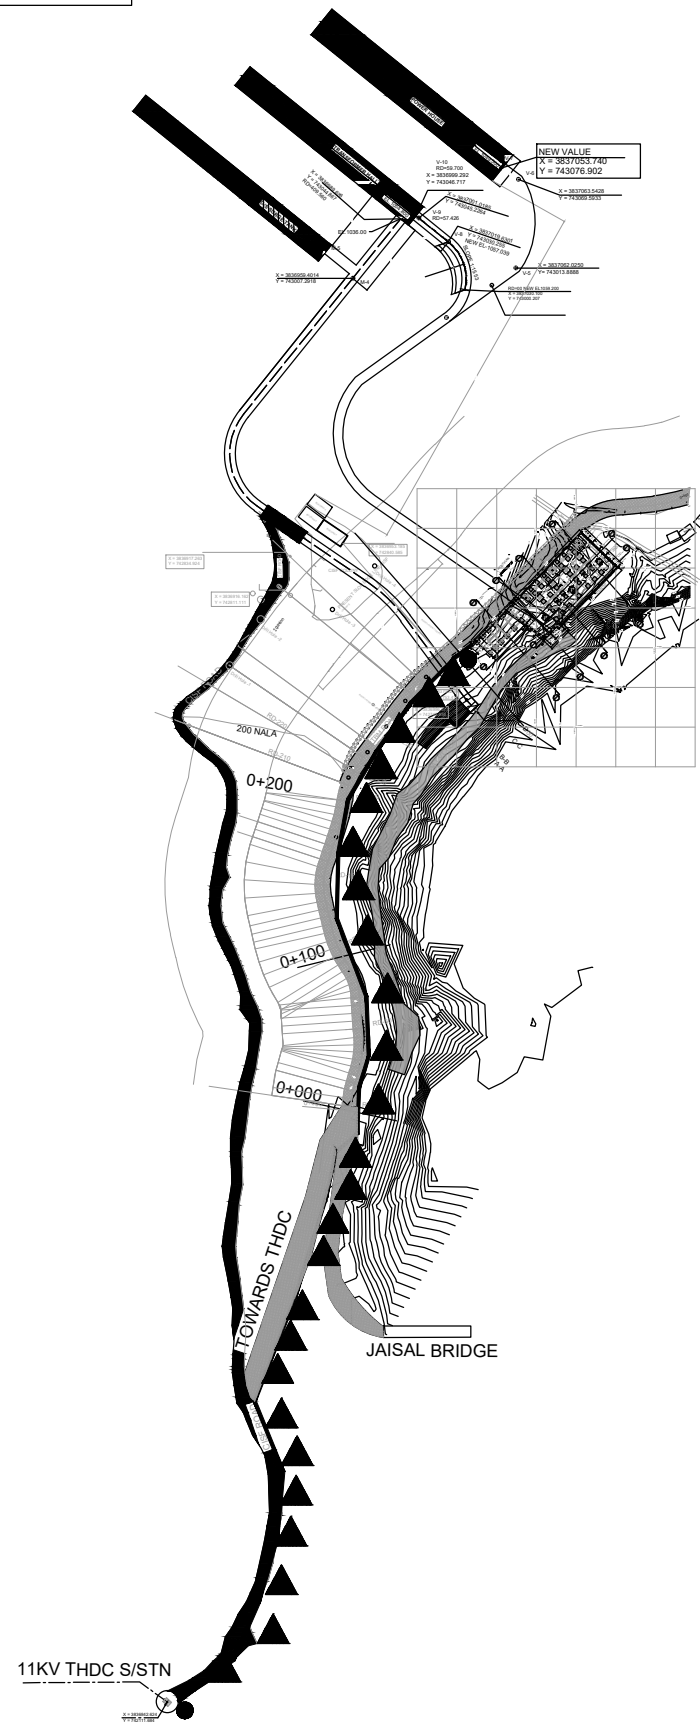
10. Packing and Dispatch




1. 11kV distribution line & its accessories shall be properly packed for selected mode of transportation i.e. sea, rail and road in such a manner that it is protected against the climatic conditions and for any damage during transportation, transit and storage. Crates/cases shall have skid bottoms for handling. Special notations such as 'Fragile', 'This side up', 'Weight', 'Owner's particulars\ 'PO nos.' etc., shall be clearly marked on the package together with other details as per purchase order.
2. The item/ materials may be stored outdoors for long periods before installation. The packing should also be suitable for outdoor storage areas with heavy rains/ high ambient temperature unless otherwise agreed and hence, Packing shall be suitable for long storage (minimum 1 year).

11. List of Documents/ Drawings


Following drawing/ documents are attached for information purpose,

1. 11kV Distribution Line- Preliminary Route Survey Drawing
2. Annexure- BOQ for 11kV Distribution Line.



ITEM DESCRIPTION		QUANTITY	SYMBOL
1.	Double Poles	25 Nos.	
2.	FOUR Poles	2 Nos.	
3.	Length of Conductor	6 Km.	
4.	Circuit route length	1 Km	
5.	Current rating for circuit	160 A	

1. The details shown are tentative and may change during detailed engineering stage as per site survey.
2. Minimum span between two poles shall be approx. 40m.
3. Four pole tubular structure is envisaged at terminating points, whereas two pole structure shall be in between as in shown in the layout).

INVENTORY No.	SIGN. & DATE	REF. OR	<div><div>11KV THDC S/STN</div></div>															<div>ADDITIONAL INFORMATION</div> <div>W.O.No.</div> <div>STATUS OF DRAWING</div> <div>DISTRIBUTION OF PRINTS</div>				<div>आइसक/परियोजना का नाम THDC INDIA LTD.</div> <div>NAME OF CUSTOMER/PROJECT 4X111 MW VISHNUGAD PIPALKOTI HE PROJECT</div> <div><div>निदेशक/प्रमाणित</div><div>भारत हेवी इलेक्ट्रिकल्स लिमिटेड</div><div>भारतीय भारी परियोजना विभाग</div><div>BHARAT HEAVY ELECTRICALS LTD.</div><div>TRANSMISSION PROJECTS DIVISION</div></div>																																																		
			<table><tr><td>REV.</td><td>DATE</td><td>ALTERED CHECKED APPROVED</td><td>REV.</td><td>DATE</td><td>ALTERED CHECKED APPROVED</td><td>REV.</td><td>DATE</td><td>ALTERED CHECKED APPROVED</td><td>REV.</td><td>DATE</td><td>ALTERED CHECKED APPROVED</td><td>REV.</td><td>DATE</td><td>ALTERED CHECKED APPROVED</td><td>REV.</td><td>DATE</td><td>ALTERED CHECKED APPROVED</td></tr><tr><td>ZONE</td><td></td><td></td><td>ZONE</td><td></td><td></td><td>ZONE</td><td></td><td></td><td>ZONE</td><td></td><td></td><td>ZONE</td><td></td><td></td><td>ZONE</td><td></td><td></td></tr><tr><td>12</td><td>10</td><td></td><td>9</td><td></td><td></td><td>8</td><td></td><td></td><td>7</td><td></td><td></td><td>6</td><td></td><td></td><td>5</td><td></td><td></td></tr></table>															REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	ZONE			ZONE			ZONE			ZONE			ZONE			ZONE			12	10		9			8			7			6			5			<div>निदेशक DEPT. TBEM</div> <div>कोड 382</div> <div>प्रमाणित/TITLE</div> <div>11kv Distribution Line- Preliminary Route</div> <div>Survey Drawing</div> <div>प्रमाणित/SCALE</div> <div>कार्ड कोड</div> <div>प्रमाणित/SCALE</div> <div>कार्ड कोड</div> <div>प्रमाणित/SCALE</div> <div>कार्ड कोड</div>
REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED	REV.	DATE	ALTERED CHECKED APPROVED																																																							
ZONE			ZONE			ZONE			ZONE			ZONE			ZONE																																																									
12	10		9			8			7			6			5																																																									

Annexure- BOQ for 11kV Distribution Line

Sl. No.	Item No.	Item description	Unit	Quantity
A		Supply Items- Main Items		
1	1.a	Supply of steel tubular pole (9 mtrs Long 410 SP33)	No.	58
2	2.a	Supply of overhead ACSR rabbit conductor	Mtrs	6600
3	3.a	Supply of GI wire (8 SWG/ 4mm)	Kg	144
4	4.a	Supply of galvanised stay set complete with 19/ 20 mm dia X 1.8 metres long stay rod, anchor plate of size 45 cm X 45 cm X 7.5 mm thick, thimble, stay clamps, turn buckle (20 mm X 600 mm), 7/ 4.00 mm dia GI stay wire and 11 KV strain insulator etc complete in all respect.	Set	29
5	5.a	Supply of single length of channel (MS 75 mmX40 mmX6 mm-7.14 Kg/ metre) pole top bracket/ cross arm for single 11 KV over head line conductors complete with 50 mmX 6 mm MS flat clamps, bolts, nuts and washers including drilling holes for insulator pins, bolts, nuts etc and painting with primer and finish paint as required	Set	1
6	5.b	Supply of single length of channel (MS 75 mmX40 mmX6 mm-7.14 Kg/ metre) V-shape cross arm for two 11 KV over head line conductors complete with 50 mmX 6mm MS flat clamps, bolts and nuts including drilling holes for insulator pins, bolts, nuts and washers etc and painting with primer and finish paint as required	Set	1
7	6.a	Supply of 11 KV pin insulator with galvanised insulator fittings, complete with large steel head galvanised pin, nuts, washers etc as required	Set	81
8	7.a	Supply of 11 KV disc insulator with galvanised insulator fittings, ball and socket type and complete with galvanised strain clamps, bolts, nuts, washers etc as required	Set	156
9	8.a	Supply of earthing/ grounding with GI earth plate 600 mmX600 mmX6 mm thick including accessories	Set	29
10	9.a	Supply of two lengths of channel (MS 75 mmX40 mmX6 mm-7.14 Kg per metre) single/double/ four pole cross arm for double three wire 11 KV over head line conductors complete with through bolts and nuts for clamping to the poles, 50 mmX 6mm MS flats welded on one side to the channel iron and with bolts and nuts on the other side for tying the cross arms together, including drilling holes for insulator pins/ fittings, bolts, nuts and washers etc (as per applicable drawing) and painting with primer and finish paint as required	Set	58
11	10.a	Supply of a cross bracing work for 11 KV overhead single/ double/ four pole structure having four members fabricated out of 50 mmX50 mmX6 mm MS angle to form a rectangle of minimum size 1400 mm widthX 2500 mm height complete with 50 mmX6 mm flat MS clamps, bolts & nuts including drilling holes and painting with primer and finish paint as required	Set	33
12	11.a	Supply of 11 KV, 400 A, TPMO (triple pole manually operated) switch with supporting MS channel, angle iron for cable support and GI pipe complete in all respect	Set	2
13	12.a	Supply of 120 mm dia DWC HDPE pipe ISI marked along with all accessories like socket, bend, coupler etc. confirming to IS 14930 Pat-II complete with fitting, complete in all respect	Mtrs	150
B		Service Items		
1	1.b	Erection of steel tubular or rail pole strut in cement concrete 1:3:6 (1 cement: 3 coarse sand : 6 graded stone aggregate 40 mm nominal size) foundation including excavation and refilling and securing with holding clamps, bolts, nuts etc. as required.	Each	58
2	2.b	Erection of over head line with ACSR rabbit conductor on pole including binding etc complete in all respect	Mtrs	6600
3	3.b	Erection of GI wire (8 SWG/ 4mm) including binding etc complete in all respect.	Kg	144

4	4.b	Erection of galvanised stay set complete with 19/ 20 mm dia X 1.8 metres long stay rod, anchor plate of size 45 cm X 45 cm X 7.5 mm thick, thimble, stay clamps, turn buckle (20 mm X 600 mm), 7/ 4.00 mm dia GI stay wire and 11 KV strain insulator etc in cement concrete 1:3:6 (1 cement:3 coarse sand: 6 graded stone aggregate 40 mm nominal size) foundation including excavation and refilling etc. as required.	Set	29
5	5.c	Erection of pole top single wire / V-shape two wire MS channel iron, cross arm on steel tubular pole for 11 KV as required	Set	1
6	6.b	Erection of 11 KV pin insulator with galvanised insulator fittings, complete with large steel head galvanised pin, nuts, washers etc as required.	Set	81
7	7.b	Erection of 11 KV disc insulator with galvanised insulator fittings, ball and socket type and complete with galvanised strain clamps, bolts, nuts, washers etc as required.	Set	156
8	8.b	Installation of earthing/ grounding with GI earth plate 600 mmX600 mmX6 mm thick including accessories and providing masonry enclosure with cover plate having locking arrangement and watering pipe of 2.7 metre long etc. with charcoal/ coke and salt as required.	Set	29
9	9.b	Erection of single/ double/ four pole 3 wire cross arm on steel tubular pole for 11 KV overhead line as required	Set	13
10	10.b	Erection of a cross bracing work for 11 KV overhead single/ double/ four pole structure having four members fabricated out of 50 mmX50 mmX6 mm MS angle to form a rectangle of minimum size 1400 mm widthX 2500 mm height complete with 50 mmX6 mm flat MS clamps, bolts & nuts including drilling holes and painting with primer and finish paint as required.	Set	33
11	11.b	Erection, testing and commissioning of 11 KV, 400 A, TPMS (triple pole manually operated) switch with supporting MS channel, angle iron for cable support and GI pipe complete in all respect.	Set	2
12	12.b	Laying of 120 mm dia DWC HDPE pipe ISI marked along with all accessories like socket, bend, coupler etc. conforming to IS 14930 Pat-II complete with fitting and cutting, jointing etc. direct in ground (75 cm below ground level) including excavation and refilling the trench but excluding sand cushioning and protective covering etc., complete as required.	Mtrs	150
13	13	Painting of single/ double/ four pole with two coat aluminum paint over red oxide primer including supply of materials, complete in all respect	Nos.	58
14	14	Fixing of danger board fabricated 10 gauge MS sheet of size 250 mmX200 mm, as per IE Rule including supply of materials, complete in all respect	Nos.	27
15	15	Providing and laying in position cement concrete of 1:3:6 specified grade but excluding the cost of centering and shuttering - All work up to plinth level complete in all respect (2.0 mx2.0 mx1.5 m) for 4 pole structure.	Cum	6

Note:

1. Any other supply/ service required for completion of work in all respect is included in bidder's scope, however any quantity change as per above shall be payable as per actual supply/ service.

Bharat Heavy Electricals Limited

Project: 400/220 kV GIS SUB STATION AT ERSAMA, PARADEEP, ODISHA

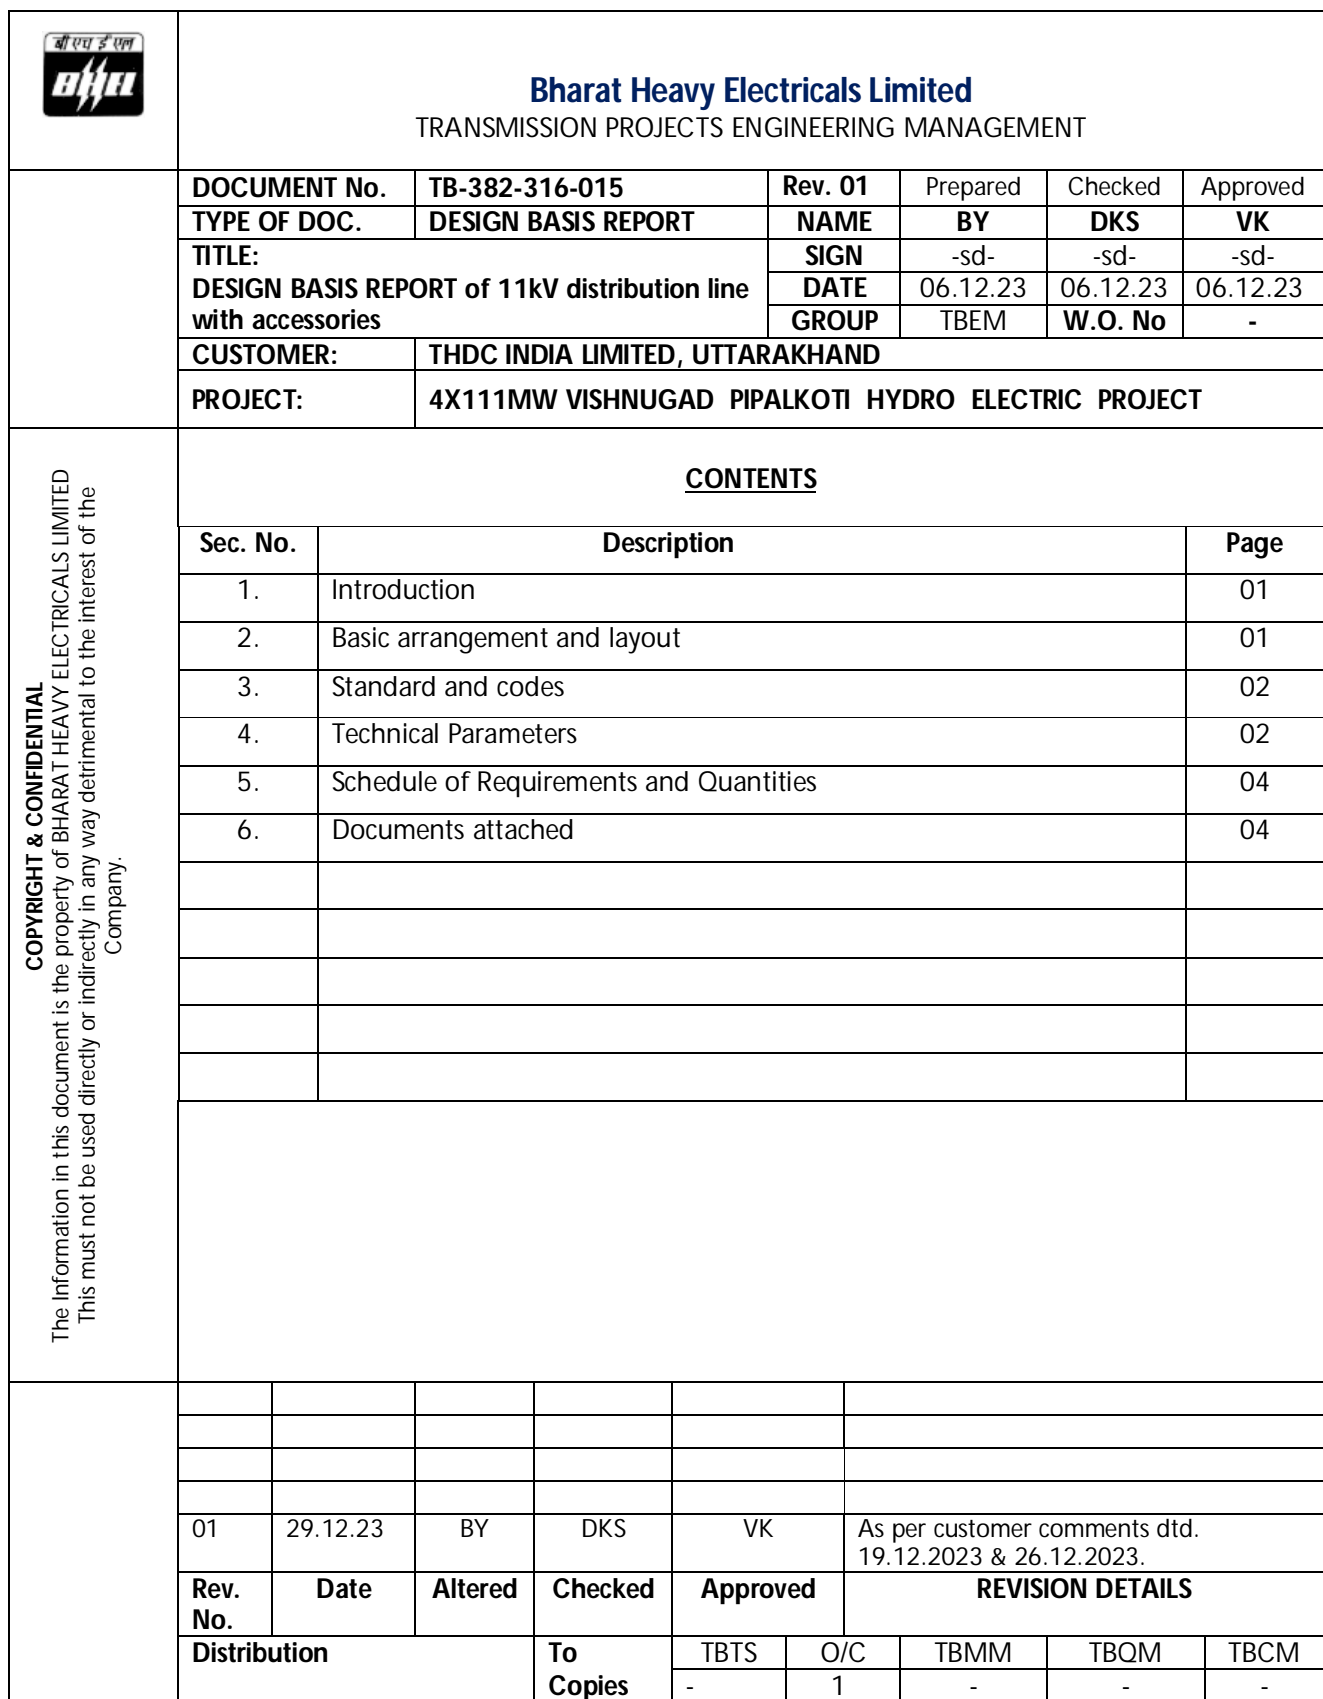
Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

SECTION 2:

EQUIPMENT SPECIFICATION UNDER SCOPE OF SUPPLIES

- DESIGN BASIS REPORT of 11kV distribution line with accessories
(Doc. No. TB-382-316-015 REV01)



1.0 INTRODUCTION:

The construction work for 11KV double distribution lines for connection between 11kV switchgear room near pothead yard to 11kV Switchgear room of 11kV THDC sub-station shall be carried out on supply-cum-erection basis. Accordingly, design philosophy covers detailed survey, spotting of location of poles, supply and erection of tubular poles in single pole support / double pole / four pole arrangement with complete 11KV line material such as 11kV disc insulators with fittings, 11KV pin insulators with pins, cross arms, pole top bracket, straight X arms, earthing material, guy sets with complete material with nuts & bolts washers, pole clamps and all other required lines accessories and belts & bracings, ACSR conductor, earth wire, fixing of insulator strings, stringing of conductor and earth wire, fixing of stays and testing and commissioning of erected 11KV lines etc.

The 11KV distribution lines shall be running almost through plain profile of 6m wide road connecting 400kV pothead yard to 11kV THDC sub-station (**please refer 11kV Distribution Line- Preliminary Route Survey Drawing**), which may require road crossing once/ twice, as per site conditions.

The purpose of Design Basis Report for 11kV distribution line with accessories is as follows,

- a) Basic arrangement and layout
- b) Standard and codes
- c) Technical parameters
- d) Schedule of requirements and quantities
- e) Document attached

2.0 BASIC ARRANGEMENT AND LAYOUT:

Suitable numbers of galvanized steel tubular poles with insulator set, guy wire, necessary hardware/ fittings and accessories shall be supplied and installed for 11kV distribution line from terminal four pole arrangement at 11kV Switchgear room near pothead yard to 11kV Switchgear room of THDC sub-station switchyard.

The four pole arrangement at both ends shall be connected through XLPE cables connected to 11kV feeders placed in respective 11kV switchgear panel room.

- a) Refer drawings 11kV Distribution Line- Preliminary Route Survey Drawing for basic layout and arrangement of 11kV double distribution line, for tentative Bill of Quantity and layout arrangement.
- b) The technical parameters for line are as follows
 - i) Nominal Voltage: 11KV

- ii) Maximum system voltage: 12KV
- iii) BIL (Impulse): 75KVpeak
- iv) Power frequency withstand voltage: 28KV
- v) System: 2x 3-phase, 4 wire system

3.0 STANDARD AND CODES:

Except when they conflict with specific requirement in the specification, the items/ materials shall comply with the relevant provisions made in the following IEC / IS and other publications with the latest version thereof,

Sl. No.	Applicable Standards	Detailed description
1.	IS 2713 (Pt-I & III): 1980	The tubular steel poles
2.	IS:731-1971	Procelain Insulators for Overhead Power Lines with a Nominal Voltage greater than 1000V
3.	IS 2486 (Pt.I): 1971 & IS 2486 (Pt.II): 1974	Metal Fittings of Insulators for Overhead Power Lines With Nominal Voltage greater than 1000 V - Specification
4.	IS 3043: 1987	Code of practice for earthing
5.	IS 2141:1979, IS 4826: 1979 & IS 6594: 1974	Hot dip galvanized stay strand
6.	IS 5561	Electric power connectors
7.	IS 2551: 1982	Danger notice plates
8.	IS 9511: 1980	Earth knobs for neutral conductors
9.	IS 280: 1978 & IS 7887: 1975	Mild Steel Wire for general engineering purposes
10.	IS 398 (Pt. I & II): 1996	Aluminium Conductors for Overhead Transmission Purposes

4.0 TECHNICAL PARAMETERS

The technical parameters for components/ items of 11kV double distribution lines are as follows,

- a) **Galvanized steel tubular poles:**

Galvanized steel tubular poles shall be supplied with following accessories, but not limited to,

- Cross arms and arm ties with bolt holes for fixing the insulator sets.
- Adequate welded frame fittings with nuts on the tubular poles for fixing step bolts up to a height of 1.2 meter below the cross arm.
- Base plates at bottom of steel poles
- Support anchors
- Other requisite accessories/ terminations/ hardware etc.

b) Insulators and fittings:

The insulator units shall be of standard 254mm porcelain disc with ball and socket arrangement having creepage path not less than 25 mm/kV and spacing of 146mm between discs. The insulator unit shall comply with provision of IEC. The dimension and characteristics of the tension insulator unit and the fittings shall be 191mm porcelain disc type with ball and socket having spacing of 146mm between discs. The insulator pin shall be furnished with a spring washer, stainless steel split lock and nut on the insulator pin.

c) Conductors and fittings

Conductors details shall be as follows,

Conductor name: ACSR Rabbit

Aluminium strands & dia: 6/3.35mm

Steel strands & dia: 1/3.35mm

Nominal aluminium area: 50 sqmm

Sectional area of aluminium: 52.88 sqmm

Total sectional area: 61.70 sqmm

Approximate Diameter: 10.05mm

Calculated resistance: 0.5524 ohm/km at 20 deg C (max.)

Calculated breaking load: 18.25kN

d) Guy wire assemblies

Guy wire assemblies shall be fixed to the upper portion of the poles and anchored to the ground. The angle of guy wires against the poles shall be within 30-45 degrees. Each guy wire assembly shall include a pole band, a guy insulator, a turnbuckle, and a screw or plate type anchor rod, with thimbles, etc. where needed,

The guy wires shall be connected to other components by means of preformed grips. Wire clips shall not be used for connection. Stay pole or flying-stay shall be provided as per the requirement and/ or as per Engineer's instruction.

Guy wires shall be the galvanized steel stranded wires of the following constructions,

- Minimum diameter of individual wire: SWG 7/8 (for 11kV line)
- Minimum number of wires in strand: 7

The followings are the minimum clearances between live conductors and other objects,

- Normal ground for pedestrians only: 5.5 meters
- Residential areas: 6.0 meters
- Roads & streets: 6.0 meters
- Power lines (above or below): 2.7 meters

The other materials shall be as per requirements mentioned in Schedule of Requirements and Quantities.

5.0 SCHEDULE OF REQUIREMENTS AND QUANTITIES:

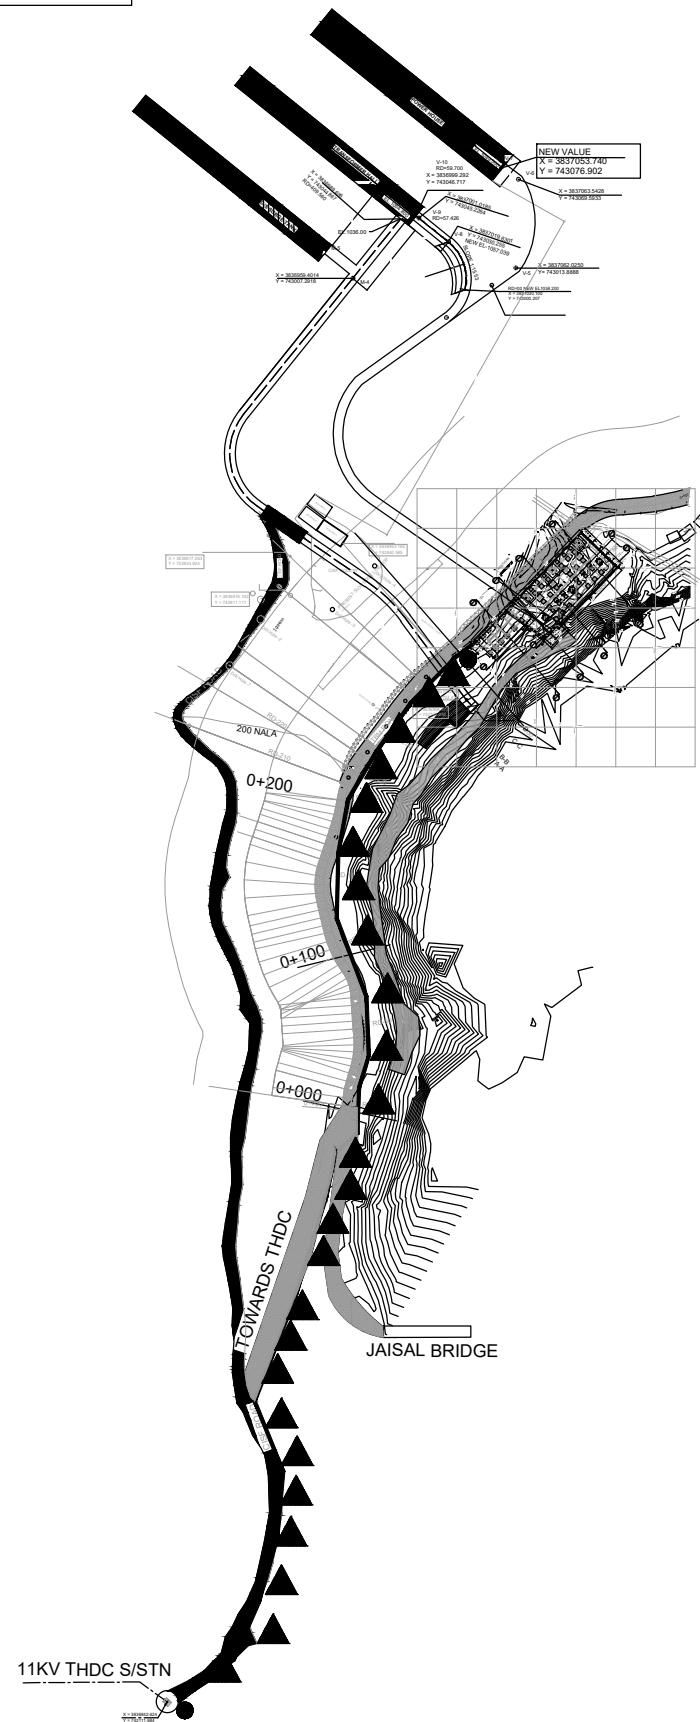
The schedule for quantities for 11kV Distribution Line is as per Annexure- BOQ for 11kV Distribution Line, which includes schedule supply as well as service also.




6.0 DOCUMENT ATTACHED:

1. Schedule for quantities for 11kV Distribution Line
2. Drawing No. TB-382-316-015::11kV Distribution Line- Preliminary Route Survey Drawing. (duly approved from THDC project team)

Bill of Quantity for 11 KV line			
Project:400kV GIS at THDC, Vishnugad Pipalkoti Project			
Item description	Unit	Description	Quantity
Supply of pole- steel tubular (9 mtr long IS410 SP33)		type (single/ double/ four)*total nos.	
Steel tubular pole- single pole	no.	1*0	0
Steel tubular pole- double pole	no.	2*25	50
Steel tubular pole- four pole	no.	4*2	8
		Total:	58
Supply of ACSR conductor- rabbit		circuit*phase*length with margin	
Start to end	mtrs	2*3*(1000*1.10)	6600
		Total:	6600
Supply of GI wire (8 SWG/ 4 mm)		circuit* length with margin	
GI wire by length (with 10% margin)	mtrs	1*(1000*1.10)	1100
GI wire by weight	kg	(1000*1.10)*0.131	144
		Total:	144
Supply of stay set complete in all respect		Total pole set*no. of stay set	
Stay set for single pole arrangement	no.	0*1	0
Stay set for double pole arrangement	no.	25*1	25
Stay set for four pole arrangement	no.	2*2	4
		Total:	29
Supply of channel for pole top bracket/ cross arm for single pole complete in all respect		Total pole*no. of cross arm	
75mmx40 mmx6 mm ms channel (7.14 kg/ metre)	no.	0*1	0
		Total:	0
Supply of channel for V-shape cross arm for single pole complete in all respect		Total pole*no. of cross arm	
75mmx40 mmx6 mm ms channel (7.14 kg/ metre)	no.	0*1	0
		Total:	0
Supply of channel for 3-wire cross arm for double/ four pole complete in all respect		Total pole*no. of cross arm	
75mmx40 mmx6 mm ms channel (7.14 kg/ metre) for double pole	no.	25*2	50
75mmx40 mmx6 mm ms channel (7.14 kg/ metre)	no.	2*4	8
		Total:	58
Supply of 11kV pin insulator with galvanised insulator fittings complete in all respect		Total pole*3 phase* one/ two side	
Single pole	no.	0*3*1	0
Double pole	no.	25*3*1	75
Four pole	no.	2*3*2	12
		Total:	87
Supply of 11 KV disc insulator with galvanised insulator fittings complete in all respect		Total pole*3 phase* one/ two side	
Single pole	no.	0*3*1	0
Double pole	no.	25*3*2	150
Four pole	no.	2*3*1	6
		Total:	156
Supply of earthing with galvanised earth plate complete in all respect		Total pole*no. of earth plate	
Single pole	no.	0*1	0
Double pole	no.	25*1	25
Four pole	no.	2*2	4
		Total:	29
Supply of cross bracing for 11 KV for pole structure complete in all respect		Total pole*no. of cross bracing	
Single pole	no.	0*0	0
Double pole	no.	25*1	25
Four pole	no.	2*4	8
		Total:	33
Supply of 11KV, 400 A, TPMO (triple Pole manually operated) switch complete in all respect		Pole*no. of TPMO switch	
Single pole	no.	0*0	0
Double pole	no.	25*0	0
Four pole	no.	2*1	2
		Total:	2
Supply & painting of pole structure along with its accessories with two coat aluminum paint over red oxide primer		type (single/ double/ four)*total nos.	
Single pole	no.	0*1	0
Double pole	no.	2*25	50
Four pole	no.	4*2	8

Bill of Quantity for 11 KV line			
Project:400kV GIS at THDC, Vishnugad Pipalkoti Project			
Item description	Unit	Description	Quantity
		Total:	58
Supply & fixing of danger board fabricated from 10 gauge MS sheet of size 250 X 200 mm, as per IE Rules,		total no. of pole system	
Single pole	no.	0*0	0
Double pole	no.	25*1	25
Four pole	no.	2*1	2
		Total:	27
Supply of 11kV, 3corex150Sqmm XLPE, aluminum conductor armoured cable,		Circuit*length	
Form Four pole arrangement to 11kV Switchgear at Pothead yard	mtrs	2*100	200.00
Form Four pole arrangement to 11kV Switchgear at 11kV THDC Switchyard	mtrs	2*150	300.00
		Total:	500.00
Supply of HDPE pipe ISI marked along with all accessories complete as required,		Circuit*length	
Form Four pole arrangement to 11kV Switchgear at Pothead yard	mtrs	2*100	200.00
Form Four pole arrangement to 11kV Switchgear at 11kV THDC Switchyard	mtrs	2*150	300.00
		Total:	500.00
Supply of indoor cable end termination jointing kit complete with all accessories for 11kV, 3corex150sqmm XLPE alluminium conductor cable as required,		Circuit*no. of kits	
1no.x3 phase indoor joint kit at 11kV Switchgear at Pothead yard	no.	2*1	2.00
1no.x3 phase indoor joint kit at 11kV Switchgear at 11kV THDC Switchyard	no.	2*1	2.00
		Total:	4.00
Supply of outdoor cable end termination jointing kit complete with all accessories for 11kV, 3 corex150Sqmm XLPE alluminium conductor cable as required		Circuit*no. of kits	
1no.x3 phase outdoor joint kit at 11kV Switchgear at Pothead yard	no.	2*3	6.00
1no.x3 phase outdoor joint kit at 11kV Switchgear at 11kV THDC Switchyard	no.	2*3	6.00
		Total:	12.00



ITEM DESCRIPTION		QUANTITY	SYMBOL
1.	Double Poles	25 Nos.	
2.	FOUR Poles	2 Nos.	
3.	Length of Conductor	6 Km.	
4.	Circuit route length	1 Km	
5.	Current rating for circuit	160 A	

1. The details shown are tentative and may change during detailed engineering stage as per site survey.
2. Minimum span between two poles shall be approx. 40m.
3. Four pole tubular structure is envisaged at terminating points, whereas two pole structure shall be in between as in shown in the layout).

[illegible]

दिलीप शुक्ल, टीबीईएम

From: Satish Kumar Arya AGM <satishkarya@thdc.co.in>
Sent: Monday, December 18, 2023 4:26 PM
To: भवभूषण कुमार शर्मा, विवेक कुमार, राज कुमार, BYADAV@BHEL.IN; A.K Ghildiyal, CGM; Anil Kumar Nautiyal; Mayank Chauhan; Akshay Kumar Saini; Amit KumarSharma
Cc: Madhwi Kumari Joshi; vivekk@bhel.in; raj kumar; BYADAV@BHEL.IN; A.K Ghildiyal, CGM; Anil Kumar Nautiyal; Mayank Chauhan; Akshay Kumar Saini; Amit KumarSharma
Subject: Re: VHPEP (4x111MW): Submission of Drawing/ documents-reg.

Dear Sir,

Route for 11KV Distribution line has been reviewed and found ok as per the survey, however route may vary as per the actual site condition at the time of execution. Current rating for circuit i.e. 160A may be confirmed from THDCIL Design Department, Rishikesh.

With Thanks & Regards,
S.K.Arya
AGM (E&C)
Vishnugad, Pipalkoti

From: "दिलीप शुक्ल, टीबीईएम" <dkshukla@bhel.in>
To: "Satish Kumar Arya AGM" <satishkarya@thdc.co.in>
Cc: "Madhwi Kumari Joshi" <madhwikumari@thdc.co.in>, vivekk@bhel.in, "raj kumar" <raj.kumar@bhel.in>, BYADAV@BHEL.IN, "A.K Ghildiyal, CGM" <akghildiyal@thdc.co.in>
Sent: Tuesday, December 12, 2023 10:00:48 AM
Subject: FW: VHPEP (4x111MW): Submission of Drawing/ documents-reg.

Dear Sir,

This has the reference to telephonic discussion with you, please find attached herewith Drawing name of **11kV Distribution Line- Preliminary Route Survey Drawing REV00** of 4X111MW Vishnugad Pipalkoti HEP for needful review and approval, please.

सादर,

दिलीप कुमार शुक्ल

उप महाप्रबन्धक (आभियांत्रिकी प्रबंधन)
पारेषण व्यापार समूह
भारत हेवी इलेक्ट्रिकल्स लिमिटेड
प्लॉट-२५, सेक्टर -१६(अ)
नोएडा (उ.प्र.)- २०१३०१
दूरभाष सं. १२०- ६७४८५३३

From: दिलीप शुक्ल, टीबीईएम [mailto:dkshukla@bhel.in]
Sent: Friday, November 3, 2023 5:27 PM
To: 'Shailendra Panwar' <emdvphpep@thdc.co.in>
Cc: 'Madhwi Kumari Joshi' <madhwikumari@thdc.co.in>; 'byadav@bhel.in' <byadav@bhel.in>; 'A.K Ghildiyal, CGM' <akghildiyal@thdc.co.in>; 'amrish@bhel.in' <amrish@bhel.in>; 'Vivek Kapil' <vivekk@bhel.in>
Subject: VHPEP (4x111MW): Submission of Drawing/ documents-reg.

COMMENTS RESOLUTION SHEET for			
DRAWING / DOCUMENT TITLE: DESIGN BASIS REPORT of 11kV distribution line with accessories			
DOCUMENT NUMBER: TB-382-316-015			
COMMENTED ON REV. NO: 00			
COMMENTS INCORPORATED IN REV. NO: 01			
Sl. No.	Reference of Drawing/ Document (Page no./ clause no.)	REV00	
		Customer/ THDC Comment (s)/ Observation(s) vide e-mail dtd. 19.12.2023 & 26.12.2023	BHEL, TBG Resolution(s)/ Clarification(s) dtd. 29.12.2023
1	Clause No. 4.0 (c)	Reference for the conductor parameter be explained. Calculated breaking load and resistance values are different with respect to IS 398 Part 2.	Noted and revised.
2	Clause No. 4.0 (d)	Minimum clearance of conductor across street shall also be mentioned as per IS 5613. Minimum clearances between live conductor of 11kV Line and other power lines shall be in line with Central Electricity Authority (Measures relating to Safety and Electric Supply) Regulations, 2023 for different voltage level.	During route survey, street crossing of conductor is not envisaged. Further interferences with other power line is also not envisaged. However, in case of such requirement during final route survey, shall be noted and complied.
3	Annexure- BOQ for 11kV Distribution Line, Sl. No. 1	Applicability of SP33 (Handbook on Timber Engineering) for steel tubular pole is not clear.	It may please be noted that steel tubular pole shall be 9 mtrs long with designation 410 SP-33 in line with IS 2713.
4	Annexure- BOQ for 11kV Distribution Line, Sl. No. 3	Conductor type mentioned is Rabbit whereas as per Cl. No. 4.0 c) conductor is 'Dog'.	Noted and revised as per Rabbit ACSR moose conductor.
5	Annexure- BOQ for 11kV Distribution Line, Sl. No. 8, 9 & 10	Not applicable, it may be deleted from list.	Noted and complied.
6	Annexure- BOQ for 11kV Distribution Line, Sl. No. 13	Please review the quantity of earth plates in line with number of poles.	Quantities mentioned are indicative, however, it shall be supplied and executed as per actual requirement at site during contract execution.
7	Annexure- BOQ for 11kV Distribution Line, Sl. No. 20, 21 & 22	At Which end of Line, XLPE shall be indoor and which end shall be in Pipe or masonry duct. (Not clear with route survey drawing).	XLPE cables shall be laid on the both sides of distribution line four pole arrangement to panel as continuous current requirement.
8		Items mentioned in BOQ are noted. However, M/s BHEL shall be solely responsible for all the equipment/ items required for successful erection commissioning of 11kV Transmission line for desired operation of the plant.	Noted.
9		Current rating for 11kV Line (mentioned as 160Amp) shall be finalized in line with auxiliary power requirement of MV/LV system.	The selection and rating of conductor was decided based on load requirement at panel side of pothead yard.

NOTE:

CONTRACTOR IS OBLIGED TO FURNISH THIS SHEET (DULY FILLED UP WITH RESOLUTION TO ALL CUSTOMER/ CONSULTANT COMMENTS ALONGWITH REVISED DRAWINGS/ DOCUMENTS.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

Contents

SECTION 3:	3
PROJECT DETAILS & GENERAL TECHNICAL REQUIREMENTS (FOR ALL EQUIPMENT UNDER PROJECT)	3
1. GENERAL.....	3
2. PROJECT INFORMATION AND SYSTEM PARAMETERS	3
3. GENERAL TECHNICAL REQUIREMENTS	5
i. Type Tests.....	5
ii. Codes and Standards	5
4. MATERIAL/ WORKMANSHIP.....	6
i. General Requirement.....	6
ii. Provisions for Exposure to Hot and Humid climate.....	7
5. COLOUR SCHEME AND CODES FOR PIPE SERVICE/ PANELS.....	7
6. PROTECTION	8
7. FUNGI-STATIC VARNISH	9
8. SURFACE FINISH.....	9
9. GALVANIZING	9
10. TRANSPORT AND PACKING	9
i. Packing	9
ii. Packing and Marking.....	10
iii. Shipping marks	11
iv. Packing lists	11
11. HANDLING, STORING AND INSTALLATION.....	11
12. DEGREE OF PROTECTION	12
13. RATING PLATES, NAME PLATES AND LABELS.....	12
14. EARTHING	13
15. TERMINAL BLOCKS AND WIRING	13
i. Wiring.....	13
ii. Terminal blocks.....	13
16. ELECTRICAL EQUIPMENT ENCLOSURE.....	14
i. General.....	14
ii. Construction requirements	15

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

17. SPACE HEATERS.....	15
18. QUALITY	16
19. DOCUMENTATION.....	18
i. List of Documents	18
ii. Drawings.....	19
iii. Approval Procedure	19
iv. Documents to be Submitted along with Offer	20
v. Documentation Schedule.....	20
20. ELECTRICAL MEASUREMENTS.....	20

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

SECTION 3: PROJECT DETAILS & GENERAL TECHNICAL REQUIREMENTS (FOR ALL EQUIPMENT UNDER PROJECT)

1. GENERAL

1. This section stipulates the General Technical Requirements under the Contract and will form an integral part of the Technical Specification.
2. The provisions under this section are intended to supplement general requirements for the materials, equipment's and services covered under other respective sections and are not exclusive. However, in case of conflict between the requirements specified in this section and requirements specified under other sections, the requirements specified under respective sections shall hold good.

2. PROJECT INFORMATION AND SYSTEM PARAMETERS

Project information and System parameters shall be as follows,

A. Project Information		
a)	Customer/ Purchaser/ Owner	THDC India Ltd., Rishikesh, Uttarakhand
b)	Consultant(THDCIL appointed)	SMEC
c)	Project Title	Vishnugad Pipalkoti Hydro Electric Project (4X111MW)
d)	Location	The Vishnugad Pipalkoti Hydro Electric Project (4 x 111 MW) is located on Alaknanda River, a major tributary of river Ganga, in district Chamoli in the state of Uttarakhand.
e)	Transport Facilities	The nearest railhead is Rishikesh (225 Km) and the nearest Airport is Jolly Grant, Dehradun (240 Km). The project is approachable by an all-weather road (National Highway No. 58).
f)	Postal Address	It shall be provided separately
B. Site Conditions		
a)	Maximum ambient Temperature	40°C
b)	Minimum ambient Temperature	-7°C
c)	Design ambient temperature for electrical equipment design	40°C
d)	Relative humidity	100%
e)	Pollution Severity	Heavily Polluted
f)	Seismic zone	IV

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 **Rev** 00

g)	Seismic Coefficient	0.38g (In horizontal direction), 0.19g (In vertical direction) for design purpose
h)	Basic Wind speed	39m/sec
i)	Maximum rainfall	293.3mm in 24 hours
C. System Parameters and Clearances (At EL 1000)		
i)	Nominal system Voltage	400kV
ii)	Highest system voltage	440kV
iii)	Rated short time current	40kA for 1 sec
iv)	Frequency	50Hz \pm 3 %
v)	Normal Current	2000A
vi)	Lightning impulse withstand voltage	1425kVp
vii)	Switching Impulse voltage	1050kVp
viii)	Power frequency withstand Voltage	630kVrms
ix)	Minimum creepage Distance	25mm/kV
x)	System earthing	Solidly earthed
xi)	Phase to phase Clearance	4200mm
xii)	Phase to Earth Clearance	3500mm
xiii)	Sectional Clearance	6500mm
D. Auxiliary Power Supply		
i)	3 phase A.C power supply	415V \pm 10%, 50 Hz \pm 3%, 3-phase 4 wire, solidly earthed , Frequency variation under extreme condition \pm 5%
ii)	1 phase A.C power supply	240V \pm 10%, 50 Hz \pm 3%, 1-phase , 2 wire , AC supply , Frequency variation under extreme condition \pm 5%
iii)	D.C. power supply	220V + 20% to -25%, 2-wire ungrounded 48V + 20% to -25% , 2 wire system positively earthed
iv)	Combined variation of voltage \pm 10%, and frequency \pm 5%,	

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

3. GENERAL TECHNICAL REQUIREMENTS

i. Type Tests

All equipment/systems to be supplied shall conform to type tests as per relevant standards and proven type. The Bidder / vendor shall furnish the reports of all the type tests carried out within last ten years from the date of signing of contract as listed in relevant clauses in respective electrical specification and relevant standards for all components / equipment / systems. These reports should be for the tests conducted on identical/ similar components /equipment/systems to those offered / proposed to be supplied under this contract.

Type tests done in an independent government laboratory or in the presence of representative of State Electricity Board or other reputed public undertakings, the type test reports of the same shall be submitted for scrutiny /approval. If these are found suitable and technically acceptable, conducting of type tests shall be waived off.

In case Vendor is not able to submit report of type test(s) conducted in last ten years, or in case type test report(s) are not found to be meeting the specification/relevant standard requirements, then all such tests shall be conducted under this contract by the Bidder free of cost to Employer/Purchaser, and reports shall be submitted for approval. No charges shall be paid under this contract. All acceptance and routine tests as per relevant standards and specification shall be deemed to be included in the bid price.

ii. Codes and Standards

All materials and equipment shall generally comply in all respect with the latest edition of relevant international electro-technical commission (IEC) or any other internationally accepted standard which ensure equal or better quality or relevant Indian standard(IS) mentioned against each equipment and this specification. Other International/National standard such as DIN, VDI, BS etc. shall be accepted for only material codes and manufacturing standards, subject to the employer's approval.

ASTM (American Society for Testing Materials), AISI (American Iron and Steel Institute), DIN (German Industrial Standards) and BSI (British Standards) are approved standards for the supply of Materials.

Material tests according to DIN 50049-3.1 C shall be provided for all important parts of the equipment such as: steel plates for parts under hydraulic pressure, all major castings (runner, shutoff valve, etc.), large forgings (turbine and generator shaft etc.), high stressed large bolts etc.

For less important parts, certificates according to DIN 50049-2.3 are acceptable.

Materials shall be new and of first-class quality, suitable for the purpose, free from defects and imperfections, and the classifications and grades in conformance with the latest issue of the respective ASTM, AISI, DIN or BS standard. Material to other standards may be used if approval by the Owner has been obtained. Material specifications, including grade or class data, shall be shown on the appropriate detail drawings submitted for review.

The vendor shall indicate in the Technical Data Schedules, the materials and applicable standards for all major parts of the supply.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

The materials shall be carefully selected for the intended purpose and due consideration of the site conditions and the tropical environment. Higher grade material shall be used where ordinary material is insufficient.

"Notwithstanding reference made to various standards all equipment and works as per provisions and requirements of relevant and latest Indian Standards shall be acceptable".

In the event of any conflict between the codes and standards referred to in the above clauses and the requirement of this specification, the requirement of Technical Specification shall govern.

The international SI-system of units shall be used for documents, calculations, correspondence, drawings etc.

4. MATERIAL/ WORKMANSHIP

i. General Requirement

Where the specification does not contain characteristics with reference to workmanship, equipment, materials and components of the covered Equipment it is understood that the same must be new, of highest grade of the best quality of their kind conforming to best engineering practice and suitable for the purpose for which they are intended.

The design of the Works shall be such that installation, future expansions, replacements and general maintenance may be undertaken with a minimum of time and expenses. Each component shall be designed to be consistent with its duty and suitable factors of safety, subject to mutual agreements and shall be used throughout the design. All joints and fastenings shall be devised, constructed and documented so that the component parts shall be accurately positioned and restrained to fulfil their required function. In general screw threads shall be standard metric threads. The use of other thread forms will only be permitted when prior approval has been obtained from purchaser.

Whenever possible, all similar part of the Works shall be made to gauge and shall also be made interchangeable with similar parts. All spare parts shall be interchangeable with, and shall be made of the same materials and workmanship as the corresponding parts of the Equipment supplied under the Specification. Where feasible, common component units shall be employed in different pieces of equipment in order to minimize spare parts stocking requirements. All equipment of the same type and rating shall be physically and electrically interchangeable.

All materials and equipment shall be installed in strict accordance with the manufacturer's recommendation(s). Only first-class work in accordance with the best modern practices will be accepted. Installation shall be constructed as being the erection of equipment at its permanent location. This, unless otherwise specified, shall include unpacking, cleaning and lifting into position, grouting, levelling, aligning, coupling of or bolting down to previously installed equipment bases/foundations, performing the alignment check and final adjustment prior to initial operation, testing and commissioning in accordance with the manufacturer's tolerances and instructions and the Specification. All factory assembled rotating machinery shall be checked for alignment and adjustments made as necessary to re-establish the manufacture's limits suitable guards shall be provided for the protection of personal on all exposed rotating and / or moving machine parts and shall be designed for easy installation and removal for maintenance

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

purpose. The spare equipment(s) shall be installed at designated locations and tested for healthiness.

The vendor/ contractor shall apply oil and grease of the proper specification to suit the machinery, as is necessary for the installation of the equipment. Lubricants used for installation purposes shall be drained out and the system flushed through where necessary for applying the lubricant required for operation. The vendor/ contractor shall apply all operational lubricants to the equipment installed by him.

All oil, grease and other consumables used in the Works/ Equipment shall be purchased in India unless the vendor/ contractor has any special requirement for the specific application of a type of oil or grease not available in India. If such is the case, he shall declare in the proposal, where such oil or grease is available. He shall help purchaser in establishing equivalent Indian make and Indian vendor/ contractor. The same shall be applicable to other consumables too.

The vendor/ contractor shall furnish the following:

- All oil for initial filling of all equipment supplied, plus 10% additional.
- Grease if required for initial filling of all of the equipment, plus 10% additional.
- Flushing fluids to flush and clean all systems.

ii. Provisions for Exposure to Hot and Humid climate

Outdoor equipment supplied under the specification shall be suitable for service and storage under tropical conditions of high temperature, high humidity, heavy rainfall and environment favourable to the growth of fungi and mildew. The indoor equipment's located in non-air conditioned areas shall also be of same type.

5. COLOUR SCHEME AND CODES FOR PIPE SERVICE/ PANELS

All internal equipment and wiring shall be neatly and clearly marked as indicated on the schematic and wiring diagrams. Internal wiring and cables shall be marked with sleeve type engraved marking. Marking system and marking material shall be subject to approval by Owner. Identification of the respective conductors shall be in accordance with the requirements of IEC publication 204. In cable having 5 conductors or more the individual conductors shall be numbered throughout the entire length. In cables having less than 5 conductors colour coding in accordance with IEC Recommendations 204 shall be used.

The vendor/ contractor shall propose a colour scheme for those equipment/items for which the colour scheme has not been specified in the specification for the approval of purchaser. The decision of purchaser shall be final. The scheme shall include,

Live parts of electrical connections shall be colour coded as follows,

Conductor Designation	Coding Alphanumeric	Symbol	Colour
AC network 3 phase	Phase 1	R	Red
	Phase 2	Y	Yellow
	Phase 3	B	Blue

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

	Neutral	N	Black
AC single phase	Phase	P	Red
	Neutral	N	Black
	Earth	E	Green yellow
DC network	Positive	a	Red
	Negative	b	Black

Colour Coding for Mimic Diagrams

Mimic diagrams to be arranged on switchgear cubicles, control panels/desks, etc., shall be colour coded as follows,

420kV	Gold
13.8kV	Signal red
415V	Black
220V DC	Violet
48V DC	White

All the steel works shall be thoroughly cleaned of rust, scale, oil, grease, dirt and scarf by pickling, emulsion cleaning, etc. The sheet steel shall be phosphated /oven dried and then painted with two coats of zinc rich primer paints. After application of the primer, two coats of finished synthetic enamel paint shall be applied. The colour of the finished coats inside shall be glossy white and exterior of the treated sheet steel shall be shade 631 of IS 5 /RAL 7032 for all switchboard /MCC/distribution board, control panels etc.

Sufficient quantities of touch paint shall be furnished for application at site. All the indoor cubicles shall be the same as exterior surface and for other miscellaneous items, colour scheme will be approved by the purchaser.

6. PROTECTION

All coated surfaces shall be protected against abrasion, impact, discoloration and any other damages. All exposed threaded portions shall be suitably protected with either a metallic or a non-metallic protecting device. All ends of all valves, pipings and conduit equipment connections shall be properly sealed with suitable devices to protect them from damage.

All equipment accessories and wiring shall have fungus protection, involving special treatment of insulation and metal against fungus, insects and corrosion. The parts which are likely to get rusted, due to exposure to weather should also be properly treated and protected in a suitable manner. Screens of corrosion resistant material shall be furnished on all ventilating louvers to prevent entry of insects.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

7. FUNGI-STATIC VARNISH

Besides the space heaters, special moisture and fungus resistant varnish shall be applied on the parts, which may be subjected or predisposed to the formation of fungi due to the presence or deposit of nutrient substances. The varnish shall not be applied to any surface of part where the treatment will interface with the operation or performance of the equipment. Such surfaces or parts shall be protected against the application to the varnish

8. SURFACE FINISH

All interiors and exteriors of tanks, control cubicles and other metal parts shall be thoroughly cleaned to remove all rust, scales, corrosion, greases or other adhering foreign matter. All steel surfaces in contact with insulating oil as far as accessible, shall be painted with not less than two coats of heat resistant, oil insoluble, insulating paints.

All metal surfaces exposed to atmosphere shall be given two primer coats of zinc chromate and two coats of epoxy paint with epoxy base thinner. All metal parts not accessible for painting shall be made of corrosion resisting material. All machine finished or bright surfaces shall be coated with a suitable preventive compound and suitably wrapped or otherwise protected. All paints shall be carefully selected to withstand tropical heat and extremes of weather within the limit specified. The paint shall not scale off or wrinkle or be removed by abrasion due to normal handling.

9. GALVANIZING

The minimum weight of the zinc coating shall be 610 gm/sq.m and minimum average thickness of coating shall be 86 microns for all items having thickness 6mm and above. For items lower than 6mm thickness requirement of coating thickness shall be as per relevant ASTM. For surface which shall be embedded in concrete, the zinc coating shall be 610 gm/sqm minimum.

10. TRANSPORT AND PACKING

i. Packing

The bidder is advised to have a total study of all aspects of transportation of equipment's to site and should make schedule of transportation in accordance with the prevailing conditions at site. The bidder shall specifically understand that the Purchaser will do the general co-ordination of storage and erection works as well as civil engineering works of power house. An appropriate Period for transportation shall be considered accordingly.

The delivery dates, transportation and erection periods and for all other associated activities indicated in the Contract Documents shall be strictly adhered to. Changes, which are unavoidable or necessary, will be regulated in accordance with the stipulations laid down in the General Conditions of Contract.

From the time of manufacturing until commissioning all parts of the plant shall be protected and insured at the vendor/ contractor's expense against loss & damage of any kind. Parts, which are damaged during transport, storage, erection or trial operation, shall be replaced at the vendor/ contractor's expense.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

ii. Packing and Marking

The vendor/ contractor shall prepare all plant, devices and materials for shipment to protect them from damage in transit, and shall be responsible for and make good all damages due to improper preparations, loading or shipment.

After the workshop assembly and prior to dismantling for shipment to the Site, all items of machinery and plant shall be carefully marked to facilitate site erection. Wherever applicable, these markings shall be punched or painted so that are clearly visible.

Dismantling shall be done into convenient sections, so that the weights and sizes are suitable for transport to Site and for handling on the Site under the special conditions of the Project.

All individual pieces shall be marked with the correct designation shown on the vendor/ contractor's detailed drawings and other documents (packing, lists, spare part lists, in Operating and Maintenance Instructions, etc.).

Each piece, separately shipped, or smaller parts packed within the same case or box, shall be legibly, marked to show the unit to which it is a part and match-marked to show its relative Position in the unit.

Unit marks and match-marks shall be done preferably by punching the marks into the metal before painting, galvanizing, etc., and shall be clearly legible after painting, galvanizing etc. In labelling, the vendor/ contractor shall endeavour to use as few designations as possible, and each part of identical size and detail shall have the same designation, regardless of its final position in the plant.

All parts of the plant shall be packed at the place of manufacture; the packing shall be suitable for shipment by sea and for all special requirements of the transportation to Site. Where necessary, double packing shall be used in order to prevent damage and corrosion during intermediate storage.

All identical members shall be packed together, if reasonably possible, in a form convenient for shipment and handling.

Small items shall be packed in boxes and large items shall be protected where necessary, by timber, straw and sacking. Drums shall be used for electric cables, steel ropes, steel wire and similar materials. All bolts, nuts, washers. etc., shall be packed in containers. Each container shall include only bolts, nuts or washers of identical size.

All parts shall be suitable protected against corrosion, water, sand, heat, atmospheric conditions, shocks, impact, vibrations, etc.

All electrical parts shall be carefully protected from damage by sand, moisture, heat or humid atmospheric conditions by packing them in high pressure polyethylene foil. Where parts may be affected by vibration, they shall be carefully protected and packed to ensure that no damage will occur while they are being transported and handled.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

Spare parts shall be packed separately and designated as specified and shall be delivered properly and adequately packed for several years' storage. All packing costs shall be included in the scope of Work.

iii. Shipping marks

The vendor/ contractor shall mark all containers with the implementing document number pertinent to the shipment. Each shipping container shall also be clearly marked on at least two sides as follows,

Consignee:

Contract No.:

Port of destination:

Item number (if applicable):

Package number, in sequence:

Quantity per package:

Description of Work:

Net and gross weight, volume, Dimensions:

iv. Packing lists

The vendor/ contractor shall provide the Purchaser with one (1) original and two (2) copies of all shipping documents and relevant packing lists of each shipment of equipment items after the same has been shipped. One copy (1) of the packing list shall be sent to the Purchaser's Representative. All packing lists shall contain the name of the vendor/ contractor or supplier and shall show the complete markings on each packed box or crate that has been shipped. Separate packing lists shall be prepared for each and all shipments made. One copy of the packing list shall be placed inside each box or crate, and one copy inserted in a weatherproof envelope affixed to the outside of each box or crate.

11. HANDLING, STORING AND INSTALLATION

Vendor/ contractor may engage manufacturer's Engineers to supervise if required for unloading, transportation to site, storing, testing and commissioning of the various equipment being procured by them separately. In case of any doubt/misunderstanding as to the correct interpretation of manufacturer's drawings or instructions, necessary clarifications shall be obtained from the purchaser. Vendor/ contractor shall be held responsible for any damage to the equipment consequent to not following manufacturer's drawings/instructions correctly.

Where assemblies are supplied in more than one section, vendor/ contractor shall make all necessary mechanical and electrical connections between sections including the connection between buses. Vendor/ contractor shall also do necessary adjustments/alignments necessary for proper operation of circuit breakers, isolators and their operating mechanisms. All components shall be protected against damage during unloading, transportation, storage, installation, testing and commissioning.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

Vendor/ contractor shall be responsible for examining all the shipment immediately of any damage, shortage, discrepancy etc. for the purpose of Purchaser's information only. Any demurrage, pilferage and other such charges claimed by the transporters, railways etc. shall be to the account of the vendor/ contractor. The vendor/ contractor shall be fully responsible, for the equipment/material until the same is handed over to the purchaser in an operating condition after commissioning.

The minimum phase to earth, phase to phase and section clearance along-with other technical parameters for the various switchyard voltage levels to be maintained shall be strictly as per the approved drawings.

The design and workmanship shall be in accordance with the best engineering practices to ensure satisfactory performance throughout the service life. If at any stage during the execution of the Contract, it is observed that the erected equipment(s) do not meet the above minimum clearances, the vendor/ contractor shall immediately proceed to correct the discrepancy at his risks and costs.

12. DEGREE OF PROTECTION

The enclosures of the Control Cabinets, Junction boxes and Marshalling boxes panels etc. to be installed shall be provided with degree of protection as detailed here under,

- a) Installed out door: IP-55
- b) Installed indoor in air conditioned area: IP-42
- c) Installed in covered area IP:52
- d) For LT switchgear (AC & DC distribution Boards): IP-54

The degree of protection shall be in accordance with IS:13947, (Part-1)/ IEC-947(Part-1). Type test report/or degree of protection test on each type of the box shall be submitted for approval.

13. RATING PLATES, NAME PLATES AND LABELS

Each major and auxiliary item of equipment shall have a nameplate permanently affixed thereto, or as directed, showing in a legible and durable manner the serial number, name and address of the manufacture, rated capacity, speed, electrical characteristics, and other significant information, as applicable. Nameplates of distributing agents only will not be acceptable. Nameplates shall also be provided for identification of all panels, cubicles and other enclosures as well as for panel-mounted devices, dials, gauges instruments and control devices. Nameplates shall be marked with the nomenclature and units of measurement used in the metric system (SI-units), and a schedule of such markings shall be submitted for review. Type of nameplates and wording on identification nameplates shall be submitted in **English for approval**. The Owner will translate the text if needed and the vendor/ contractor shall furnish and attach the nameplates.

Cautionary signs: English shall be used as prime language on nameplates required for caution or warning signs, identification plates for control devices, and instruction plates.

Other nameplates: Nameplates which are not required for the operation of the equipment and are not of a cautionary or warning nature required for the safety of personnel, i.e. showing motor

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

speeds, horsepower, electrical characteristics, name and address of manufacturer and other information necessary for maintenance and repair work are to be in English.

14. EARTHING

Circuit breakers, LA, Isolator, CVT, CT, BPI shall be provided with two grounding pads suitable for connection to galvanized steel flat. Control panels, Relay panel, outdoor marshalling boxes, Junction boxes, lighting panels and distribution board shall be provided with two grounding pads, for connection to galvanized steel flat. The two pads shall be provided, one each at the middle of the two opposite sides of the bottom frame of the equipment. Earthing of hinged door shall be done by using a separate earth wire.

All equipment such as cubicles, motors, etc. shall be connected directly to the grounding system using copper wire of area not less than 50 mm² at two different points. In general all iron parts such as supports, covers, railing, etc. shall be connected to the grounding system. Each conductor shall have its own separate connection point. Pressed on closed shoes shall be used for connections to bars.

15. TERMINAL BLOCKS AND WIRING

i. Wiring

Wiring within cubicles and equipment enclosures shall conform to requirements of this section unless otherwise specified. Control wiring shall be stranded copper and shall be not smaller than 2.5 mm², except as otherwise agreed by the Owner. Larger size wiring shall be used where needed for the current carrying capacity requirements.

Cables shall have at least 1100 V PVC insulation except for 220V DC and telemetering or communication system equipment for which 650V and 300V rating respectively are acceptable.

For current and potential transformer secondary circuits the cross section of the conductors shall not be less than 6 mm² and 4 mm² respectively.

Wiring shall terminate at terminal blocks at one side only. Where tap connections are required they shall be made on terminal blocks. Wiring shall be neatly arranged and laid in conduits accessible from the front door. The conduits shall not be filled more than 70%.

Each cubicle shall be provided with an earthing bar (PE) of sufficient cross section carrying any possible fault current without undue heating. All metallic parts of the cubicle not forming part of the live circuits, all instrument transformer terminals to be earthed and other earthing terminals as well as all cable screens and PE-wires shall be connected to the earthing bar.

ii. Terminal blocks

The terminal blocks shall be located to allow a neat and easy connection work and shall be safely accessible while the equipment is in service. Control circuits and power circuits shall be completely separated by use of divided or separate terminal blocks. Power terminal blocks shall be rated in accordance with applicable standards, and shall be provided with covers. Control wiring terminal shall be equipped with facilities for opening the circuit. It shall be possible to interchange a single terminal block for a new one without dismantling a whole row. Current transformer terminal blocks shall have provisions for short circuiting. Not more than two wires shall be connected to

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

any one terminal. Terminal blocks using screws acting directly on the wire will not be accepted. At least 20% spare terminals shall be provided. Terminals shall be marked with printed labels.

But preferably the terminal blocks shall be **non-disconnecting stud type equivalent to Elmex type CATM4, Phoenix cage clamp type of Wedge** or equivalent. The Insulating material of terminal block shall be nylon 6.6 which shall be free of halogens, fluorocarbons etc.

Terminal block for current transformer and voltage transformer secondary leads shall be provided with **test links and isolating facilities**. The current transformer secondary leads shall also be provided with short circuiting and earthing facilities.

There shall be a minimum clearance of 250mm between the first bottom row of terminal block and the associated cable gland plate. Also the clearance between two rows of terminal blocks shall be a minimum of 150 mm. The Supplier shall furnish all wire, conduits and terminals for the necessary inter-phase electrical connection (where applicable) as well as between phases and common terminal boxes or control cabinets.

All input and output terminals of each control cubicle shall be tested for surge withstand capability in accordance with the relevant IEC Publications, in both longitudinal and transverse modes. The supplier shall also provide all necessary filtering, surge protection, interface relays and any other measures necessary to achieve an impulse withstand level at the cable interfaces of the equipment.

16. ELECTRICAL EQUIPMENT ENCLOSURE

i. General

All electrical equipment, apparatus and devices shall be of suitable design for satisfactory operation under the conditions prevailing at the Site. The equipment shall operate satisfactorily under normal load and voltage variations in accordance with IEC Publications.

The design shall also include all necessary provisions ensuring the safety of the operating and maintenance personnel.

All electrical connections and contacts shall be of ample cross section and capacity for carrying continuously the specified currents without undue heating and shall be secured by bolts or set-screws of ample size, fitted with locknuts or lock washers of approved types.

Unless otherwise expressly stated, conductors and all other current carrying parts shall be electrolytic copper in accordance with approved, applicable standards.

Cubicles and other enclosures containing electrical equipment shall be especially treated to prevent corrosion. All cubicles shall be provided with a door switched lighting fixture and a single phase socket for power outlet.

All interior surfaces of electrical apparatus, enclosures etc. including contactors, relays, coils, etc., shall be treated in an approved manner to prevent mould growth. Such treatment shall in no way interfere with the proper operation of the equipment either electrically or mechanically.

Bigger assemblies such as switchboards, etc., shall be designed to present suitable transportation divisions adapted to the local conditions within the plant.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

Unless otherwise specifically called for or described in these Contract Documents all electrical appliances shall conform to the applicable IEC Publications.

ii. Construction requirements

All cubicles and enclosures shall be of good quality standard production subject to approval by the Owner. Cubicles shall be free floor standing type, of rigid frame covered with removable steel sheets. The frame shall be bolted to the floor. There shall be provision and enough space for entrance of cables from above or below as necessary. The cubicles shall be ventilated if needed; in this case removable filter inserts shall be fitted to the air entrance openings. Provision for cable fastening shall be inside the cubicles and enclosures, and sufficient space from cable fastenings to nearest terminal. All control and indicating instruments such as contactors, circuit breakers, auxiliary relays, indicating instruments, switches etc., shall be functionally displayed in appropriate location. All indicating devices shall be visible with the door closed. The layout is subject to the approval of the Owner.

If required, flush mounted hinged steel doors with latches shall be available: doors shall be with approved locks. The locks shall be of the same type throughout the plant. All panels and cubicles shall have a uniform appearance.

The cubicles and enclosures shall be of protection class IP 54 or higher according to their location, unless otherwise, there are constraints which may prevent to maintain above protection class and same shall be justified by the vendor/ contractor and approval shall be taken from the owner for the deviation. All cubicles shall be equipped with automatically controlled heating elements for protection against internal condensation and moisture.

All panels/cubicles shall have approximately 20% space for mounting of future devices.

All door, removable covers and plates shall be gasketed all around with suitably profiled **Neoprene gaskets**. The gasket shall be tested in accordance with approved quality plan. The quality of gasket shall be such that it does not get damaged /cracked during the years of the equipment or its major overhaul whichever is earlier. All gasketed surfaces shall be smooth, straight and reinforced if necessary to minimize distortion and to make a tight seal. Ventilating Louvers, if provided, shall have screen and filters. The screen shall be fine wire mesh made of brass.

All boxes/ cabinets shall be designed for the entry of cables from bottom by means of weather proof and dust-proof connections. Boxes and cabinets shall be designed with generous clearances to avoid interference between the wiring entering from below and any terminal blocks or accessories mounted within the box or cabinet. Suitable cable gland plate projecting atleast 150 mm above from the base of the Marshalling Kiosk/ box shall be provided for this purpose along with the proper blanking plates. Necessary number of cable glands shall be supplied and fitted on this gland. The gland shall project at least 25mm above gland plate to prevent entry of moisture in cable crutch. Gland plate shall have provision for some future glands to be provided later, if required.

17. SPACE HEATERS

The heater shall be suitable for continuous operation at 240 V AC supply voltage and shall be provided with on – off switch and fuse shall be provided for heater.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

One or more adequately rated, thermostatically connected heaters shall be supplied to prevent condensation in any compartment.

18. QUALITY

All materials, components and equipment covered under this specification shall be procured, manufactured, erected, commissioned and tested at all the stages, as per a comprehensive Quality Assurance Programme. An indicative programme of inspection/tests to be carried out by the vendor/ contractor for some of the major items is given in the respective technical specification. This is, however, not intended to form a comprehensive programme as it is the vendor/ contractor's responsibility to draw up and implement such programme duly approved by the Employer. The detailed Quality Plans for manufacturing and field activities shall be drawn up by the Bidder and will be submitted to Employer for approval. Schedule of finalisation of such quality plans will be finalised before award.

Manufacturing Quality Plan will detail out for all the components and equipment, various tests/ inspection, to be carried out as per the requirements of this specification and standards mentioned therein and quality practices and procedures followed by vendor/ contractor's/ sub-contractor's/ sub-supplier's Quality Control Organisation, the relevant reference documents and standards, acceptance norms, inspection documents raised etc., during all stages of materials procurement, manufacture, assembly and final testing/ performance testing. The Quality Plan shall be submitted on electronic media e.g. E-mail in addition to hard copy, for review and approval. After approval the same shall be submitted in compiled form on CD-ROM.

Field Quality Plans will detail out for all the equipment, the quality practices and procedures etc. to be followed by the vendor/ contractor's "Site Quality Control Organisation", during various stages of site activities starting from receipt of materials/equipment at site.

The Bidder shall also furnish copies of the reference documents/plant standards/ acceptance norms/tests and inspection procedure etc., as referred in Quality Plans along with Quality Plans. These Quality Plans and reference documents/ standards etc. will be subject to Employer's approval without which manufacturer shall not proceed. These approved documents shall form a part of the contract. In these approved Quality Plans, Employer shall identify customer hold points i.e. test/checks which shall be carried out in presence of the Employer's Project Manager or his authorised representative and beyond which the work will not proceed without consent of Employer in writing. All deviations to this specification, approved quality plans and applicable standards must be documented and referred to Employer along with technical justification for approval.

No material shall be dispatched from the manufacturer's works before the same is accepted, subsequent to pre dispatch final inspection including verification of records of all previous tests/inspections by Employer's Project Manager/Authorised representative and duly authorised for dispatch by issuance of Material Dispatch Clearance Certificate (MDCC).

All material used for equipment manufacture including casting and forging etc. shall be of tested quality as per relevant codes/ standards. Details of results of the tests conducted to determine the mechanical properties; chemical analysis and details of heat treatment procedure

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

recommended and actually followed shall be recorded on certificates and time temperature chart. Tests shall be carried out as per applicable material standards and/or agreed details.

The vendor/ contractor shall submit to the Employer Field/ Site Welding Schedule for field welding activities. The field/site welding schedule shall be submitted to the Employer along with all supporting documents, like welding procedures, heat treatment procedures, procedures etc. at least ninety days before schedule start of erection work at site.

All welding and brazing shall be carried out as per procedure drawn and qualified in accordance with requirements of ASME Section IX/ BS-4870 or other International equivalent standard acceptable to the Employer.

All welding/brazing procedures shall be submitted to the Employer or its authorised representative for approval prior to carrying out the welding/brazing.

All brazers, welders and welding operators employed on any part of the contract either in vendor/ contractor's/ sub-contractor's works or at site or elsewhere shall be qualified as per ASME Section-IX or BS- 4871 or other equivalent International Standards acceptable to the Employer.

Welding procedure qualification & Welder qualification test results shall be furnished to the Employer for approval. However, where required by the Employer, tests shall be conducted in presence of Employer/authorised representative.

Any other statutory requirements for the equipment/systems shall also be complied with. On all back-gauged welds MPI/LPI shall be carried before seal welding.

Unless otherwise proven and specifically agreed with the Employer, welding of dissimilar materials and high alloy materials shall be carried out at shop only.

No welding shall be carried out on cast iron components for repair.

All the heat treatment results shall be recorded on time temperature charts and verified with recommended regimes.

The vendor/ contractor shall list out all major items/ equipment/ components to be manufactured in house as well as procured from sub-contractors (BOI). All the sub-contractor proposed by the vendor/ contractor for procurement of major bought out items including castings, forging, semi-finished and finished components/equipment etc., list of which shall be drawn up by the vendor/ contractor and finalised with the Employer, shall be subject to Employer's approval. The vendor/ contractor's proposal shall include vendor's facilities established at the respective works, the process capability, process stabilization, QC systems followed, experience list, etc. along with his own technical evaluation for identified sub-contractors enclosed and shall be submitted to the Employer for approval within the period agreed at the time of pre-awards discussion.

For components/equipment procured by the vendor/ contractors for the purpose of the contract, after obtaining the written approval of the Employer, the vendor/ contractor's purchase specifications and inquiries shall call for quality plans to be submitted by the suppliers. The quality plans called for from the sub-contractor shall set out, during the various stages of manufacture and installation, the quality practices and procedures followed by the vendor's quality control

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

organisation, the relevant reference documents/standards used, acceptance level, inspection of documentation raised, etc. Such quality plans of the successful vendors shall be finalised with the Employer and such approved Quality Plans shall form a part of the purchase order/ contract between the vendor/ contractor and sub-contractor. Within three weeks of the release of the purchase orders /contracts for such bought out items /components, a copy of the same without price details but together with the detailed purchase specifications, quality plans and delivery conditions shall be furnished to the Employer on the monthly basis by the vendor/ contractor.

Employer reserves the right to carry out quality audit and quality surveillance of the systems and procedures of the vendor/ contractor's or their sub-contractor's quality management and control activities. The vendor/ contractor shall provide all necessary assistance to enable the Employer carry out such audit and surveillance.

The vendor/ contractor shall carry out an inspection and testing programme during manufacture in his work and that of his subcontractor's and at site to ensure the mechanical accuracy of components, compliance with drawings, conformance to functional and performance requirements, identity and acceptability of all materials parts and equipment. Vendor/ contractor shall carry out all tests/inspection required to establish that the items/equipment conform to requirements of the specification and the relevant codes/standards specified in the specification, in addition to carrying out tests as per the approved quality plan.

Quality audit/surveillance/approval of the results of the tests and inspection will not, however, prejudice the right of the Employer to reject the equipment if it does not comply with the specification when erected or does not give complete satisfaction in service and the above shall in no way limit the liabilities and responsibilities of the vendor/ contractor in ensuring complete conformance of the materials/equipment supplied to relevant specification, standard, data sheets, drawings, etc.

For all spares and replacement items, the quality requirements as agreed for the main equipment supply shall be applicable.

Repair/rectification procedures to be adopted to make the job acceptable shall be subject to the approval of the Employer/ authorised representative.

19. DOCUMENTATION

i. List of Documents

The bidder shall submit a detailed list of drawings / documents along with the bid proposal which he intends to submit to the Employer after award of the contract.

The supplier shall necessarily submit all the drawings / documents unless anything is waived.

All engineering data submitted by the vendor/ contractor after final process including review and approval by the Employer shall form part of the Contract Document and the entire works performed under this specification shall be performed in strict conformity, unless otherwise expressly requested by the Employer in Writing.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

ii. Drawings

All drawings submitted by the vendor/ contractor including those submitted at the time of bid shall be in sufficient detail to indicate the type, size, arrangement, material description, Bill of Materials, weight of each component, break-up for packing and shipment, the external connections, fixing arrangement required, the dimensions required for installation and interconnections with other equipment and materials, clearances and spaces required for installation and interconnection between various portions of equipment and any other information specifically requested in the specifications.

Each drawing submitted by the vendor/ contractor shall be clearly marked with the name of the Employer, the unit designation, THDCIL contract no. and the name of the Project. If standard catalogue pages are submitted, the applicable items shall be indicated therein. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be in metric units.

Further work by the vendor/ contractor shall be in strict accordance with these drawings and no deviation shall be permitted without the written approval of the Employer if so required.

All manufacturing and fabrication work in connection with the equipment prior to the approval of the drawing shall be at the vendor/ contractor's risk. The vendor/ contractor may make any changes in the design which are necessary to make the equipment conform to the provisions and intent of the Contract and such changes will again be subject to approval by the Employer. Approval of vendor/ contractor's drawing or work by the Employer shall not relieve the vendor/ contractor of any of his responsibilities and liabilities under the Contract.

iii. Approval Procedure

The scheduled dates for the submission of these as well as for, any data/information to be furnished by the Employer would be discussed and finalised at the time of award. The supplier shall also submit required no. of copies as mentioned in this specification of all drawings/design documents/test reports for approval by the Employer. The following schedule shall be followed generally for approval.

i.	Approval/comments/by employer on Initial submission	Within 3 weeks of receipt
ii.	Resubmission	Within 2 (two) weeks (whenever from date of comments required) Including both ways postal time.
iii.	Approval or comments	Within 2 weeks of receipt of resubmission
iv.	Furnishing of distribution copies	2 weeks from the date of last approval.

Note: The vendor/ contractor may please note that all resubmissions must incorporate, all comments given in the submission by the Employer failing which the submission of documents is likely to be returned. Every revision shall be a revision number, date and subject, in a revision block provided in the drawing, clearly marking the changes incorporated.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

The title block of drawings shall contain the following information incorporated in all contract drawings. Please refer below mention Title block for Submission of Documents.

Title Block

Customer	M/s THDC India Ltd., Rishikesh, Uttarakhand
Project:	Vishnugad Pipalkoti Hydro Electric Project (4X111MW)
Vendor/ contractor:	Bharat Heavy Electricals Ltd.

iv. Documents to be Submitted along with Offer

1. Drawings
2. Guaranteed Technical Particulars
3. Type Test Reports
4. Manufacturing Quality Plan

v. Documentation Schedule

Sl. No.	Description	Tender Stage	Contract stage for approval	Final Documentation	
			Prints	Prints	CDs
1	Drawings and Data Sheets	1	5	10	-
2	Drawings "As Built "	-	-	10	04
3	Type Test Reports	1	2	3	-
4	Erection Manuals	-	2	4	-
5	Operation and Maintenance Manuals	-	2	4	-
6	Manufacturing Quality Plan	1	2	4	-
7	Field Quality Plan	1	2	4	-
8	Inspection Test Reports	-	-	4	-

Soft copies of drawings at contract stage shall also be submitted in **PDF format**. Drawings will also be submitted in CD in **AUTOCAD** package for all major items. Final Documentation shall be submitted in bound volumes with Customer & Project etc. written on top.

20. ELECTRICAL MEASUREMENTS

All Electrical instruments shall be of flush mounted design, dust and moisture-proof. AC Ammeter and Voltmeters shall have moving iron system of not less than 1.5 accuracy class for connection to the secondary side of instruments transformer.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

The indicating elements of each digital indicator shall be seven segment LED illumination type. The number of digits of each digital indicator shall be selectable to be sent the required indication. The watt and the var indicators for the circuits where direction of power flow may be changed, shall be provided with “+” and “-” signs.

All transducers shall be solid –state type with an output signal range of 4-20mA DC OR 1 to 5V DC, unless otherwise specified.

All wells for capillary type thermometers, resistance temperature sensors and thermocouples shall be of the weld-in type. Wells for thermometers and temperature sensors of the screw-in type shall be restricted to measuring points for lubrication oil, and to such measuring points where welding is not suitable, e.g., at cast-iron parts. Shop-welded thermometer wells be covered by screw caps for protection during transportation and erection.

Resistance thermometers and thermocouples shall be equipped with waterproof connection heads. Thermometer arrangements shall be such that the connection heads do not become warmer than 80OC, and the measuring inserts are easily exchangeable.

The temperature sensors shall be selected in such a way to minimize the number of different spare inserts.

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

SECTION 4: ANNEXURES

Contents

SECTION 4:	2
ANNEXURE-A: COMPLIANCE CERTIFICATE OF TECHNICAL SPECIFICATION.....	2
SECTION 4:	3
ANNEXURE-B: DEVIATION/ CHANGE REQUEST OF TECHNICAL SPECIFICATION	3
SECTION 4:	4
ANNEXURE-C: TECHNICAL CHECKLIST.....	4
SECTION 4:.....	5
ANNEXURE-D: GUARANTEED TECHNICAL PARTICULARS.....	6

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

SECTION 4:

ANNEXURE-A: COMPLIANCE CERTIFICATE OF TECHNICAL SPECIFICATION

The bidder shall confirm compliance to the following by signing and stamping this compliance certificate and furnishing same with the offer.

1. The scope of supply, technical details, construction features, design parameters etc. shall be as per technical specification & there are no exclusion/ deviation with regard to same.
2. There are no deviation(s) with respect to specification other than those furnished in the schedule of deviations.
3. Only those technical submittals which are specifically asked for in Notice Inviting Tender (NIT) to be submitted at tender stage shall be considered as part of offer. Any other submission, even if made, shall not be considered as part of technical offer.
4. Any comments/ clarifications on technical/ inspection requirements furnished as part of bidder's covering letter shall not be considered by BHEL, and bidder's offer shall be construed to be in conformance with the specification.
5. Any changes made by the bidder in the price schedule with respect to the description/ quantities from those given in 'BOQ' of the specification shall not be considered (i.e., technical description & quantities as per the specification shall prevail).

Date:

Bidder's Stamp & Signature

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

SECTION 4:

ANNEXURE-B: DEVIATION/ CHANGE REQUEST OF TECHNICAL SPECIFICATION

Bidder shall list out all technical potential deviation/ change request (s) along with clause with respect to technical specifications.

Sl. No.	Page No.	Clause No.	Deviation	Reason/ Justification(s)
---------	----------	------------	-----------	--------------------------

Any deviation not specifically brought out in this section shall not be admissible for any commercial implication at later stage. Except to the technical deviations listed in this schedule, bidder's offer shall be considered in full compliance to the tender specifications irrespective of any such deviation indicated / taken elsewhere in the submitted offer.

Date:

Bidder's Stamp & Signature

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)

Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

SECTION 4:

ANNEXURE-C: TECHNICAL CHECKLIST

(Mark a tick mark on 'YES' if the specified requirement is met, or put a tick mark on 'NO' if the Specified requirement is not met and give comments in the remark column. OR Write '(NA)' if the information/ query/ schedule is not relevant.)

Sl. No.	Parameters/ Particulars	Requirement	Bidder's confirmation
1	Technical Qualifying Requirement		
1.1	The bidder to furnish relevant documents for meeting the qualifying requirement.	Confirmed	Yes
1.2	The technical bid shall be submitted by the Manufacturer.	Confirmed	Yes
1.3	All the documents shall be submitted in English.	Confirmed	Yes
2	Un-priced BOQ		
2.1	Confirm that all items have been quoted separately. Non-quoting of any item shall lead to non-evaluation of technical bid.	Confirmed	Yes
2.2	Any other accessories for the completeness of supply is deemed to be included in the offer, whether specifically mentioned in the specification or not.	Confirmed	Yes
3	Type Tests		
3.1	Whether valid type test reports of all the tests as per relevant IS/IEC & Customer specification enclosed in this specification, conducted earlier on identical material/ equipment are available (test reports shall be of the tests conducted not earlier than ten (10) years from original scheduled date of technical bid opening.	Confirmed	Yes
3.2	If the valid type test reports are not available with the bidder, then the mentioned tests shall be conducted by the bidder without any cost/ delivery implication to BHEL/THDCIL.	Confirmed	Yes
4	General Requirements		
4.1	Bidder to confirm that at all drawings / data	Confirmed	Yes

Bharat Heavy Electricals Limited

Project: Vishnugad Pipalkoti Hydro Electric Project (4X111MW)


Technical Specification: 11kV distribution line with accessories

Doc No. TB-382-316-015 Rev 00

	sheets/ calculations/ QP/ valid type tests reports/ all relevant information shall be submitted to BHEL for organizing approval of ultimate customer.		
4.2	Bidder to confirm that it will offer approved Make of the components and fitments at contract stage. In case the offered make is not approved by the customer, then alternate make shall be supplied without any commercial implications to BHEL.	Confirmed	Yes
5	Technical requirements		
5.1	Applicable standards	As per clause 2/ section-1	Yes
5.2	Type of boards	Metal enclosed, indoor, floor mounted, compartmentalized and free standing	Yes
5.3	Module type	Non-draw out type for all panels except ACDB (Incomer/ bus coupler/ battery charger feeder draw out type)	Yes
5.4	Ingress Protection requirement	Not less than IP-54	Yes
5.5	All Boards Offered	In line with specification and BOQ	Yes
5.7	Provision for Digital & Analogue Signals for SAS/ SCADA	In line with specification and aux. SLD	Yes
5.8	Cubicle Colour finish	IS: 631	Yes

Date:

Bidder's Stamp & Signature

 PROJECT:Vishnugarg Pipalkoti HEPP (4X111MW) Package: EM Package Sub Package : Pot head Yard Eq Contract No.:				ANNEXURE - LIST OF ITEMS REQUIRING QUALITY PLAN APPROVAL AND ACCEPTABLE SUB-VENDOR AS PROPOSED BY M/S.BHEL					DOC.NO. : REV.NO. : 0 DATE : 08.07.2015	
S.No.	Item Description	QP/Insp Cat	QP# - QVE Q	QP Sub- schedule	QP Approval Schedule	Proposed Sub-Supplier	Place	Sub-Supplier Approval status/ category	Sub-supplier details submission schedule	Remarks
1	400 kV Gas Insulated Switchyard	I	10			ALSTOM T&D	CHENNAI	A		IN ADDITION TO THE VENDORS LISTED, THE VENDORS ALREADY APPROVED BY THDCIL IN THEIR CONTRACT AGREEMENT AT PAGE#31 VOL-I ARE ALSO TO BE REFERRED.
						ALSTOM T&D	FRANCE	A		
						HYOSUNG	KOREA	A		
						XIAN	CHINA	A		
2	Up to 400 kV Isolator (AIS)	I	20			HIVELM	Chennai	A		
						SIEMENS	Hyderabad	A		
						GR POWER	Hyderabad	A		
						SWITCHGEAR & STRUCTURALS	Hyderabad	A		
						S&S POWER	Pondicherry	A		
						BIMCO	MEDAK	DR		
3	Up to 400 kV Current Transformers	I	30			ALSTOM	Hosur	A		
						ABB	Vadodara	A		
						BHEL	Bhopal	A		
						CGL	Nasik	A		
						MEHRU	Bhiwadi	DR		
						HEPTACARE	Meerut	DR		
						VISHAL TRANSFORMERS	MEERUT	DR		
4	Up to 400kV Capacitor Voltage Transformers	I	40			ALSTOM	Hosur	A		
						ABB	Vadodara	A		
						BHEL	Bhopal	A		
						CGL	Nasik	A		
						MEHRU	Bhiwadi	DR		
						VISHAL TRANSFORMERS	MEERUT	DR		
5	Up to 400 kV Surge Arrestors	I	50			OBLUM	Hyderabad	A		
						CGL	Nasik	A		
						LAMCO	Hyderabad	A		
						ELPRO INTERNATIONAL	PUNE	DR		
6	Up to 400 kV Wave Trap	I	60			Alstom	Hosur	A		
						BPL	Palghat	A		
						BPEG	CHINA	A		
7	Bus Post Insulator	I	70			SARAVANA Global	Cuddalore	A		
						WSI	Chennai	A		

Handwritten signature
08/07/2015

Handwritten signature

Handwritten signature

S.No.	Item Description	QP/Insp Cat	QP# Q	QVE	QP Sub- schedule	QP Approval Schedule	Proposed Sub-Supplier	Place	Sub-Supplier Approval status/ category	Sub-supplier details submission schedule	Remarks
							ADITYA BIRLA	Halol	A		
							IEC	Bhopal	A		
							MODERN INSULATORS	Abu Road	A		
8	Disc Insulator	I	80				ADITYA BIRLA	RISHRA (WB)	A		
							BHEL	Bhopal	A		
							IEC	Bhopal	A		
							MODERN INSULATOR	ABU ROAD	A		
							SARAVANA	Cuddalore	A		
							WSI	Chennai	A		
9	Aluminium Tube	I	90				HINDALCO	Renukut	A		
							BANCO	BARODA	A		
							Jindal AL Tube	Bangalore	A		
							Alom Extrusions	Kolkatta	A		
							BALCO	Korba	A		
							SUDAL	Nasik	A		
							Century Extrusions	Kolkatta	A		
10	ACSR Conductor	I	100				HINDUSTAN VIDYUT PRODUCT LTD	Faridabad	A		
							APAR	Silvassa	A		
							DIAMOND	Vadodra	A		
							GUPTA POWER INFRA	Bhubaneshwar	A		
							CABCON	Kolkata	A		
							SMITA CONDUCTOR	Ghaziabad	A		
							GALAXY	Sangli	A		
							HIRA CABLES	Hirakud	A		
							Hiren Aluminium	Silvassa	A		
							Lumino	Kolkata	A		
							SARAVATHY	Bangalore	A		
							JSK	Silvassa	A		
11	1.1kV Grade Power, Control Cables	I	110								Refer Cabling List
12	Substation Automation System BCU, GRP, Energy Meter, Numerical Relays Switchyard Protection	I	120				ABB	Peenya	A		
	(Item subject to Sub QR approval)						SIEMENS	Kalwa	A		
							SCHNEIDER	Noida	A		
							ALSTOM	Chennai	A		
							BHEL	Bhopal	A*		* Approved only for C&R panel
							GE	Bangalore	DR		

S.No.	Item Description	QP/Insp Cat	QP# - QVE Q	QP Sub- schedule	QP Approval Schedule	Proposed Sub-Supplier	Place	Sub-Supplier Approval status/ category	Sub-supplier details submission schedule	Remarks
13	Components for Control & Relay Panels, Protection Panels, Islanding Scheme & Bay Control Unit									* : Inspection category of the Item shall be same as mentioned in MQP of SAS
a	Energy Meter	*				Elster	Mumbai	A		
						SEMS	Udaipur	A		
						Landis & GYR	Switzerland	A		
						GEC Meters	UK	A		
						Conzerv	Bangalore	A		
						Wallaby	Bangalore	DR		
						L&T	Mysore	DR		
b	EVENT LOGGER	*				ALSTOM T&D	UK / FRANCE	A		
						HATHWAY	UK	A		
c	TIME SYNCHRONIZING EQUIPMENT	*				ARBITER	USA	A		
						HOPF	GERMANY	A		
						HATHWAY	UK / USA	A		
						SERTEL	CHENNAI	A		
						SIEMENS	GERMANY	A		
						Masibus	Gandhinagar	A		
						SANDS	CHENNAI	DR		
d	RELAY TEST KIT	*				OMICRON	USA/AUSTRALIA	A		
						DOBBLE	USA	A		
						MEGGER	UK	A		
e	DISTURBANCE RECORDER	*				ALSTOM T&D	USA	A		
						SIEMENS	GERMANY	A		
						ABB	FINLAND	A		
						HATHWAY	UK	A		
f	LARGE VIDEO SCREEN (LVS)	*				DELTA	Gurgaon	A		
						BARCO	Noida	A		
						Planner	USA	A		
g	RELAYS	*				ABB	Sweden / Bangalore	A		
						ALSTOM T&D	UK/CHENNAI	A		
	(NUMERICAL AND AUXILIARY)					SCHNEIDER	UK/France	A		
						SIEMENS	GERMANY	A		
						SCHNEIDER	Noida/Chennai	DR		
						GE	Bangalore	DR		
14	Instrumentation Cable	I	130							Refer C&I List

S.No.	Item Description	QP/Insp Cat	QP# - QVE Q	QP Sub- schedule	QP Approval Schedule	Proposed Sub-Supplier	Place	Sub-Supplier Approval status/ category	Sub-supplier details submission schedule	Remarks
15	BMK	I	140			C&S	Noida	A		
						Pyrotech	Udaipur	A		
						Schneider	Nashik	A		
						Space Switchgear	Gurgaon	A		
						Jakson	Greaser Noida	A		
						TRICOLITE	SAHIBABAD	A		
						MAKTEL	BARODA	A		
						Unilec Switchgear	Gurgaon	A		
						Jasper	Noida	DR		
16	Lighting Pole	I								Refer Elect. Eq. List
17	Clamps & Connectors and Welding Sleeves	II	150			EMTT	Kolkata	A		
						EXALT	MUMBAI	A		
						KLEMMEN	Chennai	A		
						MEGHA	Chennai	A		
						Milind	Mumbai	A		
						PEE VEE ENGG	Bangalore	A		
						Raychem (Tyco)	Bangalore	DR		
18	Insulator Hardware	II	160			EMI	Mumbai	A		
						EMTT	Kolkatta	A		
						IAC	Kolkatta	A		
						ITPL	Mumbai	A		
						RUL	Kolkatta	A		
						TAG CORPORATION	CHENNAI	A		
						Raychem (Tyco)	Bangalore	DR		
19	LIGHTING MAST	II						A		Refer Elect. Eq. List
20	AC KIOSK	II	170			U-FOAM	HYDERABAD	A		
						JINDAL MECTEC	GURGAON	A		
						I COMM TEL	HYDERABAD	A		
						Isolloyd	Baddi	A		
21	JB (All Types) / Lighting Panel	II	180			C&S	Noida	A		
						Jakson	Greaser Noida	A		
						MAKTEL	BARODA	A		
						Pyrotech	Udaipur	A		
						Schneider	Nashik	A		
						Space Switchgear	Gurgaon	A		
						TRICOLITE	SAHIBABAD	A		

hmm

AS

Heather

S.No.	Item Description	QP/Insp Cat	QP# - QVE Q	QP Sub- schedule	QP Approval Schedule	Proposed Sub-Supplier	Place	Sub-Supplier Approval status/ category	Sub-supplier details submission schedule	Remarks
						Unilec Switchgear	Gurgaon	A		
						Jasper	Noida	DR		
22	Leakage Current Analyser	III				ISA	ITALY	A		
						Transinor	Norway	A		
						Scope T&M	Pune	A		
						DOBLE ENGG	USA	A		
23	SF6 GAS FILLING AND EVACUATING PLANT, GAS RECYCLING & PURIFYING PLANT, GAS LEAKAGE DETECTOR	III				ENERVAC	CANADA	A		
						DILO	GERMANY	A		
						VACCUUM PLANT INDUSTRIES	PUNE	A		
						AI QUALITEK	USA	A		
						WIKA	USA	A		
						Manik Motors	Hyderabad	DR		
24	OPERATIONAL ANALYSER WITH DCRM KIT	III				OMICRON	USA	A		
						DOBBLE	USA	A		
						SCOPE	PUNE	A		
						VIC	USA	A		
25	GS Flat / MS Flat / 40 MM Dia. M.S. Rod / M.S. Earth Rods/U Clamp / GI Earth Pipe / GI Pipe / GI Conduit (Including Bends) / PVC Pipes	III				Main Contractor Approved Sources				
26	Cable Tray, Bends, Coupler Plates	III								Refer Cabling List
27	Cable glands	III								Refer Cabling List
28	Cable Lugs	III								Refer Cabling List
29	Lighting Fixtures & Luminaries	III								Refer Elect. Eq. List
30	Industrial Receptacles	III								Refer Elect. Eq. List
31	GS Earthwire / Lighting Wire	III				Main Contractor Approved Sources				
32	EOT Crane									Refer CHP List

S.No.	Item Description	QP/Insp Cat	QP# - QVE Q	QP Sub- schedule	QP Approval Schedule	Proposed Sub-Supplier	Place	Sub-Supplier Approval status/ category	Sub-supplier details submission schedule	Remarks
33	AC Ventilation of Control Room Building									Refer AC Ventilation List
34	Ventilation of GIS Building									Refer AC Ventilation List
<p>Note</p> <p>1 SYSTEM SUPPLIERS/SUB-SUPPLIERS APPROVAL STATUS CATEGORY(SHALL BE FILLED BY THDC) A-For this items proposed vendor is acceptable to NTPC.To be indicated with letter "A" in the list along with condition of approval,if any DR-For these items "Detailed required for THDC review.To be identified with letter "DR" in the list. NOTED- For these items vendors are approved by Main Supplier & accepted by THDC without specific vendor approval from THDC. To be identified with "NOTED"</p> <p>2 QP / INSPN CATEGORY CAT-I :For these items the Quality Plans approved by THDC & final acceptance will be on physical inspection witness by THDC. CAT-II :For these items the Quality Plans approved by THDC. However no physical inspection shall be done by THDC. The final acceptance by THDC shall be on basis of documents as approved OP CAT-III:For these items Main supplier approves the Quality Plans.The final acceptance by THDC shall be on basis of certificate of conformance by the main supplier.</p> <p>3 UNITS/WORKS : Place of manufacturing Place of Main Supplier of multi units/works.</p> <p>4 Clearance to be taken from THDC before placing the order</p>										

Munish
08/09/2015
(Munish Kashyap)

AG

Kashyap
(BHEL)

**FORMAT OF NO DEVIATION CERTIFICATE
(To be submitted in the bidder's letter head)**

REF:

Dated.....

**BHARAT HEAVY ELECTRICALS LIMITED,
TRANSMISSION BUSINESS GROUP,**

**5th Floor, BHEL SADAN,
Plot No- 25, Sector- 16A, Noida,
Distt. Gautambudh Nagar, UP-201301**

**SUB: TENDER FOR “SUPPLY AND WORKS OF 11KV DISTRIBUTION LINE FOR 400 KV GIS AT VISHNUGAD
PIPALKOTI HYDRO ELECTRIC PROJECT (4 X 111 MW), THDC INDIA LIMITED, RISHIKESH IN
UTTARAKHAND”.**

Tender Ref.: TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 Date: 22.01.2025

Dear Sir,

With reference to above, this is to confirm that as per tender conditions, we have visited subject site before submission of our offer and noted the job content & site conditions etc.

We also confirm that we have not changed / modified the tender documents as appeared in the website and in case of observance at any stage, it shall be treated as null and void. We hereby confirm that we have not taken any deviation from tender clauses together with other references as enumerated in the above referred NIT and we hereby convey our unqualified acceptance to all terms and conditions as stipulated in the tender and NIT. In the event of observance of any deviation in any part of our offer at a later date whether implicit or explicit, the deviations shall stand null & void.

We confirm to have submitted offer strictly in accordance with tender instructions.

Thanking you,

Yours faithfully,

(Signature, date & seal of authorized representative of the bidder)

DECLARATION FOR RELATION IN BHEL

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder failing which the offer of Bidder is liable to be summarily rejected)

Ref:

Date.....

**To,
Sr. DGM/TBSM
Transmission Business Group,
Bharat Heavy Electricals Limited,
6th Floor, BHEL SADAN,
Plot No. 25, Sector-16A, Noida,
Distt. - Gautam Buddh Nagar, UP-201301**

Dear Sir,

Sub: Declaration for relation in BHEL

Reference: -

1. NIT/Tender Specification No.: TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 Date: 22.01.2025

I/We hereby submit the following information pertaining to relation/relatives of Proprietor/ Partner(s)/Director(s) employed in BHEL

Tick (√) any one as applicable:

1. The Proprietor, Partner(s), Director(s) of our Company/Firm DO NOT have any relation or relatives employed in BHEL

OR

2. The Proprietor, Partner(s), or Director(s) of our Company / Firm HAVE relation / relatives employed in BHEL and their particulars are as below:

a)

b)

Signature of the Authorized Signatory

Note:

- 1) Attach separate sheet, if necessary.
- 2) If BHEL Management comes to know at a later date that the information furnished by the Bidder is false, BHEL reserves the right to take suitable against the Bidder/ Contractor.

DECLARATION BY AUTHORISED SIGNATORY OF BIDDER

(To be typed and submitted in the Letter Head of the Company/Firm of Bidder)

To,

**Sr. DGM/TBSM
Transmission Business Group,
Bharat Heavy Electricals Limited,
6th Floor, BHEL SADAN,
Plot No. 25, Sector-16A, Noida,
Distt. – Gautam Buddh Nagar, UP-201301**

Dear Sir,

Sub: Declaration by Authorized Signatory regarding Authenticity of submitted documents.

Ref: 1) NIT/Tender Specification No: TBSM/ VISHNUGAD PIPALKOTI /SUPPLY-ETC/TENDER/24-25 Date: 22.01.2025

2) All other pertinent issues till date

I/We, hereby certify that all the documents submitted by us in support of possession of “Qualifying Requirements” are true copies of the original and are fully compliant required for qualifying / applying in the bid and shall produce the original of same as and when required by Bharat Heavy Electricals Limited.

I / We hereby further confirm that no tampering is done with documents submitted in support of our qualification as bidder. I / We understand that at any stage (during bidding process or while executing the awarded works) if it is found that fake / false / forged bid qualifying /supporting documents / certificates were submitted, it would lead to summarily rejection of our bid / termination of contract. BHEL shall be at liberty to initiate other appropriate actions as per the terms of the Bid / Contract and other extant policies of Bharat Heavy Electricals Limited.

Yours faithfully,

(Signature, Date & Seal of Authorized
Signatory of the Bidder)

Date:

Place

FORMATS FOR EPAYMENTS

To,

Sr.DGM (Finance)
Transmission Business Group
BHEL, TBG Finance,
Plot no. - 25, Sector - 16A
Noida - 201301; U.P.

Subject: E-Payments vide RTGS/NEFT

I/We request and authorise you to effect Epayment vide any of the above two modes to my/our bank account as per the details given below:

Vendor Name :

Title/Name of Account in the bank :

Account Type(Saving /current) :

Bank Account Number

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Name & address of Bank

Bank /Branch contact person's name :

Bank /Branch Tele Numbers with STD code :

Bank Branch MICR code

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

(please enclose a copy of a cheque. This cheque should not be a payable at par cheque)

Bank Branch RTGS IFSC code

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Bank Branch NEFT IFSC code

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

(you can obtain this from branch where you have your account)

Your Email address :

(not more than 20 character)

Name of the Authorised Signatory : (Please mention here name of person from your organization signing this letter.)

Contact Person's name : (please mention here the name of a person in your company/organization)

I/We confirm that information provided above is correct & any consequences due to any mistake in above will be borne by us.

Thanking you

For
(Authorised Signatory)

We confirm that we are enabled for receiving RTGS/NEFT credits and we further confirm that the account number of (Please mention here name of the account holder), the signature of the authorised signatory and the MICR and IFSC Codes of our branch mentioned above are correct.

Bank's Verification
(Manager's/Officers signature under
bank Stamp)

Note:- Please attach cancelled original Cheque leaf.