



SPECIFICATION FOR GREASE HOSE

SPEC. No.

REV.
No.

GF.099 01

MATERIAL CODE :

FEEDER SIZE : 24"

QTY. PER FEEDER : TWO.

LOCATION : 65-724
(GREASE HOSE GROUP)DESCRIPTION : $\frac{1}{4}$ " GREASE HOSE EQUIVALENT TO SAE 100 R6.

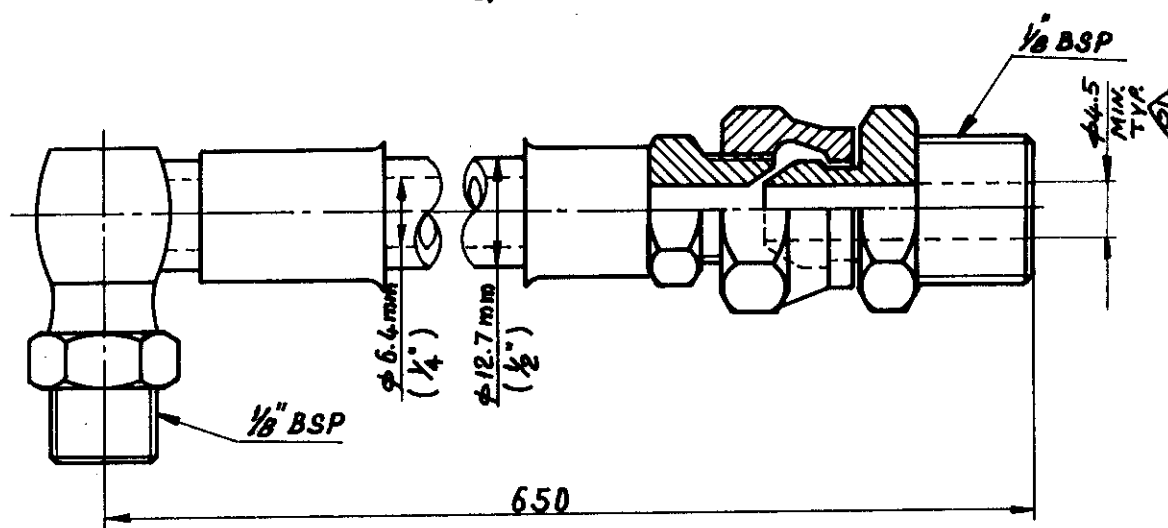
MATERIAL : SYNTHETIC RUBBER

REINFORCEMENT : ONE BRAID HIGH TENACITY RAYON.

COVER : OIL & ABRASION RESISTANCE SYNTHETIC RUBBER

WORKING TEMPERATURE : 95°C

MIN. RADIUS OF BEND : 65mm.

HOSE SIZE : ID 6.4mm ($\frac{1}{4}$ "), OD 12.7mm ($\frac{1}{2}$ ")WORKING PRESSURE : 28 kg/cm² (400 PSI)TESTING PRESSURE : 56 kg/cm² (800 PSI)BURSTING PRESSURE : 112 kg/cm² (1600 PSI)

NOTE : END FITTING DIMENSIONS TO BE DECIDED BY THE SUPPLIER.

REV.01 25/08/88	END FITTING ID SHOWN. <i>Rechecked</i>					
	NAME	SIGN	DATE.	MILLS & FEEDERS		SH. No.
PREPARED	G. RAMACHANDRAN	<i>G. Ramchandran</i>	09.08.88			01
CHECKED	P. K. RAYAN SUDRAN	<i>P. K. R. Sudran</i>	11.8.88			No. of. SH
APPROVED	M. ALAG ARSAMY	<i>M. Alag Aramy</i>	11/8/88			01