



GRAVIMETRIC FEEDER
SPECIFICATION FOR
GREASE HOSE

SPEC. No. REV. No.
GF-069 04

MATERIAL CODE : REFER TABLE

FEEDER SIZE: 36"

No. OFF/FEEDER : REFER TABLE

LOCATION : 65-736
(GREASE HOSE GROUP)

DESCRIPTION: $\frac{1}{4}$ " GREASE HOSE EQUIVALENT TO SAE 100 R6

MATERIAL : SYNTHETIC RUBBER

REINFORCEMENT : ONE BRAID HIGH TENACITY RAYON

COVER : OIL & ABRASION RESISTANCE SYNTHETIC RUBBER

WORKING TEMPERATURE : 95°C

MIN. RADIUS OF BEND : 65 mm.


HOSE SIZE : I.D. 6.4 mm ($\frac{1}{4}$ "). O.D. 12.7 mm ($\frac{1}{2}$ ")

WORKING PRESSURE : 28 kg/cm² (400 PSI)

TESTING PRESSURE : 56 kg/cm² (800 PSI)

BURSTING PRESSURE : 112 kg/cm² (1600 PSI)

END FITTINGS : $\frac{1}{8}$ " BSP MALE (SWIVEL) MADE OF BRASS / STAINLESS STEEL.

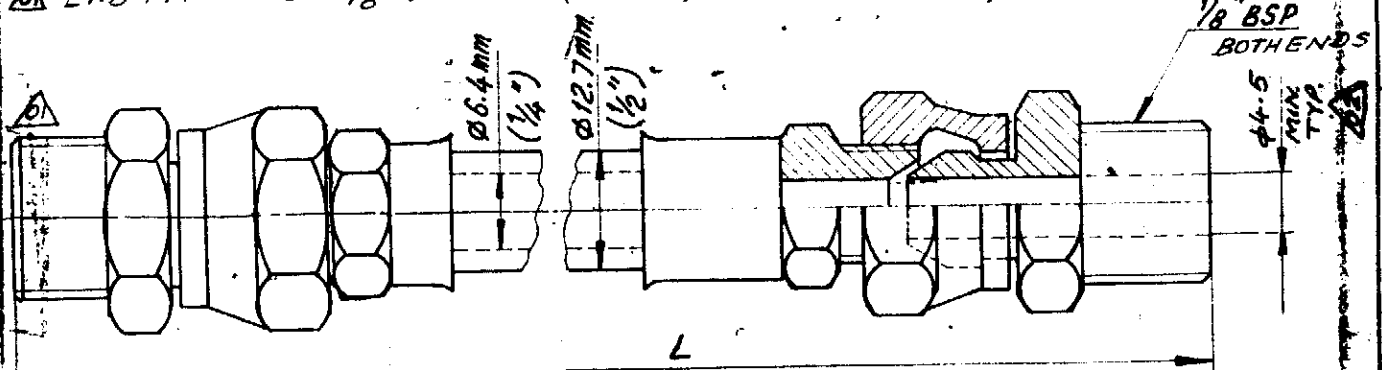

NOTE: END FITTING DIMENSIONS TO BE DECIDED BY THE SUPPLIER.

REV. 04
DATE: 30-01-89
ONE END FITTING WAS
 $\frac{1}{8}$ " BSP FEMALE
APD. H. VENKATACHARI
25.09.88

STYLE No.	LENGTH L (mm)	MATERIAL CODE	STOCK PART No.	No. OFF	REMARKS
01	650	96-424-072	X-3245-16 X-3245-18	4	
02	900	96-424-073	X-3245-30	4	

REV.	DATE : 30-01-89	ALT.	REV.	ENDFITTING ID	REV.	MATERIAL CODE
01	ONE END FITTING WAS	CHD.	25.09.88	SHOWN.	03	CORRECTED : NEW
	1/8" BSP FEMALE	APD.				
	NAME	SIGN		DATE	SH. NO.	
PREPARED	S. MANIVANNAN	S. Manivannan		11-06-88	01	
CHECKED	R. VENKATACHARI	R. Venkatchari		13.6.88	MILLS & FEEDERS No. OFF.	
APPROVED	D. K. RAVI	D. K. Ravi		13.6.88	01	